



CATALOGUE 2026-2027

OPTOELECTRONIC COMPONENTS

www.everlight.com

EVERLIGHT

EVERLIGHT

One Source For Every Need

EVERLIGHT Electronics Co., Ltd. was founded in 1983 in Taipei, Taiwan led by Chairman Robert Yeh. EVERLIGHT Electronics Co. has over 40 years of R&D experience for reliable capability. With immediate service and an excellent brand reputation, EVERLIGHT has taken top five in the competitive LED market. Our products are manufactured and packed in-house to guarantee maximum quality and service.

EVERLIGHT provides a diverse product portfolio consisting of High Power LEDs, SMD LEDs, Lamps, Lighting Components, LED Lighting Modules, Digital Displays, Opto-couplers and Infrared Components for various applications. Today, EVERLIGHT is a global company with over 6,400 employees based in China, Hong Kong, Japan, Korea, Singapore, Malaysia, India, Germany and U.S.A.

For more information, please visit our website :

www.everlight.com

CONTENTS

Alphanumeric Index	06
Conditions of RoHS	17
Application Notice	18
Technical Data	19

Visible LED

Lighting	54
Horticulture Lighting	73
UV	75
Flash LED	82
SMD LED	87
Subminiature LED Lamps (Leadframe)	87
Surface Mount (RGB+IC)	88
Top view B1818	88
Top view B1414	88
Top view B1010	89
Side view	89
Side view B3010	89
Top view C5050	90
Top view C3227	90
Side View C4516	91
Side view C7024	91
Side view C1818	91
Side View B2706	92
Surface Mount RGBW	92
Top View B1410	92
Top View B1212	93
Surface Mount RGBW PLCC6	93
Surface Mount PLCC6 LED (Reflector)	94
Surface Mount PLCC2 LED (Reflector)	94
Surface Mount PLCC4 LED (Reflector)	96
Surface Mount PLCC2 LED (Reflector)	97
Surface Mount PLCC4 LED (Reflector)	97
Surface Mount PLCC4 LED (Reflector)	98
Surface Mount PLCC6 LED (Reflector)	99
Surface Mount PLCC4 LED (Reflector)	100
Surface Mount PLCC6 LED (Reflector)	100
Surface Mount PLCC2 LED (Reflector)	101
Surface Mount PLCC6 LED (Reflector)	101
Surface Mount PLCC2 LED (Reflector)	102
Surface Mount PLCC2 LED (Reflector)	103
Surface Mount PLCC4 LED (Reflector)	103
Surface Mount PLCC6 LED (Reflector)	104
Surface Mount PLCC4 LED (Reflector)	104
Surface Mount LED (PCB)	105
Surface Mount Chip LED (PCB)	106
Top View 0402 (0.2T~0.5T)	107
Top View 0603 (0.2T~0.8T)	112
Top View 0805	113
Top View 1206	116
Top View LED	116
Top View Bi-Color	120
Top View Full Color	122
Side View (0.2T~1.0T)	125
Side View Bi-Color	126
Side View Full Color	127
Reverse Mount	129
Reverse Mount Bi-Color	130
Reverse Mount Full Color	131
Top View Double Molding 1609	131
Surface Mount CSP	131
CSP0603	132
CSP1005	132
CSP0806	132

LED Lamps	3mm Round Type		133
	5mm Round Type		138
	3mm Cylindrical		143
	5mm Cylindrical		143
	5mm Square		143
	Rectangular		144
	3mm Assembly LED		146
	5mm Assembly LED		148
LED Digital Displays	Chip On Board Display	Single Digit Display	150
		Dual Digit Display	152
		Three Digit Display	156
		Four Digit Display	158
		Dot Matrix Display	160
		Light Bar Display	161
	SMD Display	Single Digit Display	162
		Dual Digit Display	165
		Three Digit Display	166
		Four Digit Display	167
Signage LED	Surface Mount PLCC LED (Reflector)	Top View PLCC4	168
		Top View PLCC6	169
		Top View Full Color	170
	3mm Oval Type		171
	5mm Oval Type		173
	5mm Round Type		173
Automotive LED	Interior Lighting		175
	Ambient Lighting		180
	Exterior Lighting		183
Backlighting LED	Direct type Product		194
	Edge Type Product		194
	Side View Product		196
	Automotive Product		199
	Local Dimming Product		202

CONTENTS

Infrared LED, Sensors, Couplers , Digital Isolation

Infrared LED and Silicon Detector		206
Infrared Receiver Module	IRM-Dip series	241
	IRM-SMD series	243
Optic-Fiber Device (Photo Link)	Transmitter (PLT) Component	248
Optical Switch	Encoder	249
	Transmissive Type	249
	Reflective Type	253
Optical Sensors	Ambient Light Sensor	Analog 256
		Digital 259
	Color Sensor	Analog 260
		Digital 261
	Skin Sensor	261
	Proximity Sensor	Digital 262
Photo Coupler	Photo Transistor	4pin SSOP-AC 263
		4Pin SSOP-DC 263
		16pin SSOP-AC 264
		16pin SSOP-DC 264
		4pin SOP-AC 265
		4pin SOP-DC 265
		4pin SSOP-DC 266
		8pin SOP-DC 266
		4pin Long Creepage 268
		5pin Long Creepage 269
		4pin DIP-AC 270
		4pin DIP-DC 270
		6pin DIP-AC 271
		6pin DIP-DC 272
		8pin DIP-DC 273
		16pin DIP-DC 273
		4pin High Isolation 274
		16pin SSOP-DC 275
	Photo Darlington	4pin SSOP-DC 275
		4pin DIP-DC 276
		6pin DIP-DC 277
		8pin DIP-DC 277
	Schmitt Trigger	6pin DIP-DC 278
	High Speed	5pin SOP-DC 278
		5pin SOP 279
		8pin SOP-DC 279
		8pin DIP-DC 281
		8pin Wide Body DIP-DC 283
		6pin SDIP-DC 285
		6pin LSOP 286
		8pin 15mm LLSOP-DC 286
	Triac Driver	4pin DIP-DC 287
		5pin DIP-DC 288
		6pin DIP-DC 289
		4pin SOP 290
	Photo Power Triac Driver	8pin DIP-DC 291
	Solid State Relay	4pin SOP 292
		8pin SOP-2.54mm 292
		4pin DIP 293
		6pin DIP-DC 293
		8pin DIP-DC 294
		16pin DIP 294
		6pin-SDIP-DIP 295
	IGBT Gate Driver	8pin DIP-DC 295
		8pin Wide Body DIP-DC 296
		6pin-LONG CREEPAGE-DC 296
		8pin 15mm-LLSOP-DC 297
	Linear Coupler	Linear 8pin-DIP 298
		Linear 8pin Wide Body DIP-DC 298
	Isoamp	8pin-DIP 299
		8pin SDIP 299

Digital Isolation	High speed Digital isolator	SO8	300
		16pin LSOP	301
		16pin SOPN	302
		16pin QSOP	302
	Gate Driver	8pin SDIP	303
		16pin SDIP	303

Semi Power

Semi Power	TO Series	306
	DFN Series	311

ALPHANUMERIC INDEX

VISIBLE LED

1003SUBD/S400-A6	145	15-215/R6C-AQ1R2L/2T	114	19-117/BHC-ZL1M2RY/3T	107
1003SUGD/S400-A4	145	15-22/BHG6C-A31/2T	116	19-117/T1D-AP2Q2QY/3T	107
1003SURD/S530-A3	145	15-22/R6G6C-A32/2T	116	19-118/BHC-ZL1M2QY/3T	108
1003SYGD/S530-E2	145	15-22/R8T1D-D30/2T	116	19-123/R6GHC-D01/2T	118
11-21/BHC-AQ2S2/2T	113	15-23B/R6GHBHC-A01/2T	120	19-137/R6GHBHC-A01/2T	120
11-21/G6C-AR2S2B/2T	113	1533SURD/S530-A3	145	19-21/B6C-AP2Q2M/3T	108
11-21/R6C-AR2S2B/2T	113	1533UYD/S530-A3	145	19-21/BHC-ZQ1R2N/3T	108
12-215/BHC-AP1Q2/3C	123	1608-C70100M-AM	175	19-21/G6C-AL1M2LY/3T	108
12-215/G6C-BN2P2L/3C	123	1608-IB0100M-AM	175	19-21/G6C-FP1Q1L/3T	108
12-215/R6C-AR1S1B/3C	123	1608-SR0100M-AM	175	19-21/GHC-YP1Q2TY/3T	108
12-215/T1D-AQ2R1HY/3C	123	1608-UB0100M-AM	175	19-21/GPC-FL1M2B/3T	108
12-21C/BHC-AN1P2/2C	122	1608-UG0100M-AM	175	19-21/R6C-AL2N1VY/3T	108
12-21C/G6C-BK1L2VY/2T	122	1608-UR0100M-AM	175	19-21/R6C-FP1Q2L/3T	108
12-21C/R6C-AS1T1B/2C	122	1608-UY0100M-AM	175	19-21/R7C-AK1L2BY/3T	108
12-21C/T3D-CP1Q2B12Y/2C	122	16-213/BHC-ZL1M2QY/3T	106	19-21/R8C-FN2Q1L/3T	108
12-22C/G6R6C-A30/2C	125	16-213/GHC-YR1S1/3T	106	19-21/S2C-AL2M2VY/3T	108
12-22C/G6Y2C-A30/2C	125	16-213/R6C-AQ2R2B/3T	106	19-21/S2C-AQ1R2B/3T	108
12-22C/T3S2D-C35/2C	125	16-213/T7D-AQ1R1QY/3T	106	19-21/T1D-CPQTY/3T	108
12-23C/R6GHBHC-A01/2C	126	16-216/T3D-AQ1R2TY/3T	106	19-21/Y2C-AL1M2VY/3T	108
12-23C/RSGHBHW-5V01/2C	89	16-219A/T2D-AR2T1QY/3T	107	19-21/Y2C-CP1Q2B/3T	108
12-23C/S2GHBHC-A01/2C	126	16-916/T1D-AP1Q2QY/3T	123	19-213/BHC-AP1Q2/5T	109
1224-10SURC/S530-A3	136	17-21/BHC-AP1Q2/3T	112	19-213/G6C-AP1Q2/5T	109
1224SDRC/S530-A4	136	17-21/BHC-XLMJY/3T	112	19-213/GHC-XS1T1N/5T	109
1224SUBC/C470/S400-A4	136	17-21/G6C-AP1Q1B/3T	112	19-213/R6C-AQ1R2B/5T	109
1224SUGC/S400-A5	136	17-21/G6C-FM1N2B/3T	112	19-213/R8C-FN1P2/5T	109
1224SYGC/S530-E2	136	17-21/GHC-XS1T2M/3T	112	19-213/S2C-AP1Q2B/5T	109
1224USOC/S530-A3	136	17-21/GHC-YR1S2/3T	112	19-213/S3C-AN2P2B/5T	109
1224UTC/S400-A6	136	17-21/GPC-AK0M1B/3T	112	19-213/T1D-KS1T1N/5T	109
1254-10SDRD/S530-A3	136	17-21/GVC-AMPB/3T	112	19-213/Y2C-CQ2R2L/5T	109
1254-10SDRT/S530-A3	136	17-21/R6C-AN2Q1B/3T	112	19-217/BHC-AN1P2/6T	109
1254-10SURD/S530-A3	136	17-21/R6C-AP1Q2L/3T	112	19-217/BHC-XK1L2B11X/6T	109
1254-10SURT/S530-A3	136	17-21/R7C-AN2Q1B/3T	112	19-217/G7C-AN1P2/6T	109
1254-10SYGD/S530-E2	136	17-21/S2C-AP1Q2B/3T	112	19-217/GHC-YR1S2/6T	109
1254-10SYGT/S530-E2	136	17-21/T1D-CP2R1TY/3T	112	19-217/R6C-P1Q2/6T	109
1254-10UYD/S530-A3	136	17-21/T1D-KQ1R2B5Y/3T	112	19-217/S2C-AL1M2VY/6T	109
1254-10UYOT/S530-A3	136	17-21/Y2C-AN1P2/3T	112	19-217/S3C-AL2N1VY/6T	109
1383-2SDRD/S530-A3	141	17-21/Y2C-CP2Q2B/3T	112	19-217/T1D-CQ2R2TY/6T	109
1383-2SURD/S530-A3	141	17-215/B6C-YP2RN/3T	113	19-217/T7D-CT2V1N/6T	109
1383SDRD/S530-A3	141	17-215/BHC-AP1Q2/3T	113	19-217/Y5C-AP1Q2/6T	109
1383SYGD/S530-E2	141	17-215/G6C-BM1N2L/3T	113	19-217/Y5C-AQ2R2/6T	109
1383UYD/S530-A3	141	17-215/G6C-FN2P2B/3T	113	19-218/BHC-ZL1M2QY/3T	111
15-11/BHC-ZL2N1QY/2T	114	17-215/R6C-AQ1R2B/3T	113	19-218/GHC-YR1S2M/3T	111
15-11/T1D-AQRHY/2T	114	17-215/S2C-AQ1R2B/3T	113	19-218/R6C-FM2P1B7Y/3T	111
15-13D/R6GHBHC-A01/2T	120	17-223/BHR7C-C30/3C	125	19-218/T1D-CQ2R2TY/3T	111
15-21/B6C-YR1S2B2/2T	115	17-223/R6G6C-D30/3C	125	19-219/R6C-AM1N2VY/3T	111
15-21/BHC-AN1P2/2T	115	18-038BT/BDGAR6S1-FM03/38T	170	19-219/T3D-AQ2R2TY/3T	111
15-21/G6C-FM1N2B/2T	115	18-038FABT/BDGAR6S1-FM04/38T	170	19-219/T7D-AV1W1E/3T	111
15-21/G6C-FP1Q1L/2T	115	18-038FBT/BDGAR6S1-FM03/38T	170	19-219/Y5C-AM1N2VY/3T	111
15-21/GHC-XS1T1/2T	115	18-218/BHC-AL2N1RX/3T	105	19-22/G6R6C-A31/2T	118
15-21/GHC-YR2U1/3T	115	18-218/GHC-YP2R1RX/3T	105	19-22/R6BHC-B01/2T	118
15-21/R6C-AN1P2/2T	115	18-218/R6C-AK1L2BX/3T	105	19-22/R6GHC-C02/2T	118
15-21/R6C-FQ1R1B/2T	115	18-218/S2C-BK1L2X/3T	105	19-22/Y2G6C-A14/2T	118
15-21/S2C-AQ2R2B/2T	115	18-218/Y5C-AJ1K2BX/3T	105	19-223/G6S2C-A01/2T	119
15-21/S3C-AP1Q2/2T	115	18-225/B6R6C-C01/3T	117	19-223/R6BHC-A05/2T	119
15-21/T1D-CP1Q2TY/2T	115	18-225/R6G6C-A01/3T	117	19-223/R6G6C-A01/2T	119
15-21/T7D-JQ2S1PY/2T	115	18-225/S2G6C-A01/3T	117	19-223/R7BHC-A30/2T	119
15-21/Y2C-AP1QB/2T	115	18-225A/R6GHW-B01/3T	117	19-223/R7G6C-A01/2T	119
15-21/Y2C-CP1Q2B/2T	115	18-239D/R6GHBHC-D01/2T	122	19-223/S2BHC-A01/2T	119
15-215/G7C-BN1P2B/2T	114	18-239D/R6GHBHC-M01/2T	122	19-223/S2T1D-C30/2T	119
15-215/R6C-AM2P1VY/2T	114	19-117/BHC-YJ2K2TX/3T	107	19-223/Y2G6C-A01/2T	119

VISIBLE LED

19-237/R6GHBHC-A04/2T	121	264-7SUGC/S400-A4	134	333-2UYD/S530-A3	139
19-337/R6GHBHC-A01/2T	121	264-7SUGC/S400-A5	134	333-2UYOC/S530-A3-L	139
19E-213/B7C-AR2S2B2/5T	110	264-7SURC/S400-A8	134	334-15/F1C1-1XZA	140
19E-213/G6C-AN2P2B/5T	110	264-7SURD/S530-A3	134	334-15/F1C2-7VXA	140
19E-213/GHC-YR1S2/5T	110	264-7SYGC/S530-E3	134	334-15/F1C5-1RTA	140
19E-213/R6C-AR1S1B/5T	110	264-7SYGD/S530-E2	134	334-15/FNC1-4YZA	140
19E-213/S2C-AQ2R2B/5T	110	264-7UYC/S400-A9	134	334-15/T1C1-4WYA	140
19E-213/T1D-KS1T1N/5T	110	264-7UYD/S530-A3	134	334-15/T1C3-2TVA	140
19E-213/Y2C-CQ2R2L	110	27-21/BHC-AN1P2/3C	124	334-15/T1C3-7TVA	140
19E-217/B7C-ZL2N1B3X/6T	110	27-21/BHC-AP1Q2/3C	124	334-15/T1C5-7QSA	140
19E-217/G6C-JL1M2VY/6T	110	27-21/GHC-YR1S2M/3C	124	334-15/T2C3-2TVC	140
19E-217/GHC-YR1S2/6T	110	27-21/R6C-AP1Q2B/3C	124	334-15/T2C5-1PSB	140
19E-217/R6C-ALJM2VY/6T	110	27-21/T3D-AP2Q2HY/3C	124	334-15/T2C5-1QSB	140
19E-217/S2C-AM2N2VY/6T	110	27-21/Y2C-CPQB/3D	124	334-15/X1C2-1UWA	140
19E-217/T1D-CQ2R2TY/6T	110	2820-C03501H-AM	184	334-15/X1C5-1QSA	140
19E-217/Y5C-AR2S2B/6T	110	2820-PA3001H-AM	184	334-15/X2C1-1WYB	140
204-10SDRD/S530-A3	133	2820-SR2001M-AM	184	334-15/X2C3-1TVA	140
204-10SUBC/S400-A4	133	2820-SR3501H-AM	184	334-15/X2C5-1PSB	140
204-10SUBD/S400-A4	133	2820-UR2001M-AM	184	336SURSYGW/S530-A3	139
204-10SUGC/S400-A5	133	2820-UR3501H-AM	184	336SYGSYGD/S530-E2	139
204-10SURD/S530-A3	133	2820-UY2001M-AM	184	336UYSYGW/S530-A3	139
204-10SURD/S530-A3-L	133	2820-UY3501H-AM	184	339-1SURSYGW/S530-A3	140
204-10SURT/S530-A3	133	28-21SDRC/S530-A3/TR8	87	339-1UYSYGW/S530-A3	140
204-10SYGC/S530-E2	133	28-21SYGC/S530-E3/TR8	87	339-9SUGSURSUBW/S1182/MS	174
204-10SYGD/S530-E3	133	28-21UYC/S530-A3/TR8	87	3474BABR/MS	171
204-10UYD/S530-A3	133	3011L-C70201H-AM	178	3474BAGR/MS	171
204-10UYOC/S530-A3	133	3011L-PYG0201H-AM	178	3474BARR/MS	171
204-15/FNC2-2TVA	133	3011L-SR0201H-AM	178	3474BFBR/MS	171
204-15UTC/S400-X9	133	3011L-UB0201H-AM	178	3474BFGR/MS	171
209-3SURSYGW/S530-A3	134	3011L-UG0201H-AM	178	3474BFRR/MS	171
209SDRSYGW/S530-A3	134	3011L-UR0201H-AM	178	3474BKBR/MS	172
209SURSYGC/S530-A3	134	3011L-UY0201H-AM	178	3474BKGR/MS	172
209UYOSUGC/S530-A3	134	3014-BUT-SBBBCAK1E-2T8-CS	97	3474BKRR/MS	172
2214-C70201M-AM	175	313-2SUBC/C470/S400-A4	138	3474DKBR/MS	172
2214-C70301H-AM	175	313-2SURD/S530-A3	138	3474DKGR/MS	172
2214-PA0201H-AM	175	313-2SYGC/S530-E2	138	3474DKRR/MS	172
22-21/BHC-AN1P2/2C	123	313-2SYGD/S530-E2	138	3735-C8PA1501H-AM	185
22-21/GHC-YR1S2/2C	123	313-2UYD/S530-A3	138	3735-C8PA2501H-AM	185
22-21/R6C-AJ2L1AX/2C	123	323-2SDRD/S530-A3	138	383-2SDRC/S530-A3	141
22-21/Y2C-CP1Q1B/2C	123	323-2SURD/S530-A3	138	383-2SUBC/C470/S400-A6	141
22-23CRGBW/S757/TR8	126	323-2SYGD/S530-E2	138	383-2SUGC/S400-A4	141
23-21/BHC-AM1N2TY/2A	127	3294-15SUBC/S400-A6	137	383-2SURC/S400-A6	141
23-21/G6C-AL2N1/2A	127	3294-15SUGC/S400-A6	137	383-2SURC/S530-A3	141
23-21/R6C-AM1N2AY/2A	127	3294-15SURC/S400-A7	137	383-2SYGC/S530-E2	141
23-215A/BHC-DN2P2E/5A	128	3294-15UBGC/S400-A6	137	383-2SYGD/S530-E2	141
23-21B/BHC-ZM1N2TY/2A	127	333/B1C1-ARUA/MS	173	383-2USOC/S530-A6	141
23-21B/G6C-AM2P1/2A	127	333/G1C1-AVYA/MS	173	383-2UYC/S530-A3	141
23-21B/S2C-AP1Q2B/2A	127	333/Y5C1-ATWB/MS	173	414-10SURD/S530-A3	143
23-21B/T1D-CP2Q2TY/2A	127	333-2SDRC/S530-A4	139	414-10UYD/S530-A3	143
23-21C/T1D-CP2Q2TY/2A	128	333-2SDRD/S530-A3	139	4204-10SUBC/C470/S400-X9-L	137
23-22B/R7G6C-A30/2A	129	333-2SUBC/C470/S400-A6	139	4204-10SURC/S530-A3	137
23-22B/R7G6C-A30/2T	129	333-2SUBD/S400-A4	139	4204-10SYGC/S530-E4	137
23-22B/T3S2D-C30/2A	129	333-2SUGC/S400-A5	139	42-21/BHC-AUW/1T	116
23-22C/S2BHC-B30/2A	130	333-2SURC/S400-A8	139	42-21A/BHC-ZV1W2N/1T	116
23-23B/R6GHBHC-A01/2A	130	333-2SURD/S530-A3	139	42-21A/Y2C-ATW/1T	116
24-21/BHC-A1Q2/2A	128	333-2SYGC/S530-E2	139	42-21SURC/S530-A4/TR8	116
24-21/GHC-YR2U1/2A	128	333-2SYGD/S530-E2	139	42-21SYGC/S530-E2/TR8	116
25-21/BHC-AR1S2E/2A	129	333-2UTC/S400-A6	139	42-21UYC/S530-A2/TR8	116
25-21/GHC-YSU/2A	129	333-2UYC/S400-A7	139	423-2SUBC/S400-X9	143
264-7SDRC/S530-A3	134	333-2UYC/S530-A3	139	423-2SURC/S530-A3	143

ALPHANUMERIC INDEX

VISIBLE LED

423-2UYC/S530-A6	143	583SURD/S530-A3	143	67-22/R6BHC-B07/2T	98
423-2UYOC/S530-A6	143	583SYGD/S530-E2	143	67-22/R6Y2C-B31/2T	98
45-11/B7C-FS2U1B14/2T-AFM	71	583UYD/S530-A3	143	67-22ST/KK8C-5M2712068Z15/2T	58
45-21/RSC-AU1V1B/2T-AFM	71	594SURD/S530-A3	145	67-22ST/KK8C-5M2712568Z15/2T	58
45-21/YSC-AU1V1C/2T-AFM	71	594SYGD/S530-E2	145	67-22ST/KK8C-5M2713068Z15/2T	58
45-21S/KK2C-H2727L7M4B2Z6/2T	71	594UYD/S530-A3	145	67-22ST/KK8C-5M2714068Z15/2T	58
45-21S/KK2C-H3030L8M4B2Z6/2T	71	6324/F1C9-1LNA	142	67-22ST/KK8C-5M3012568Z15/2T	58
45-21S/KK2C-H3535L8M4B2Z6/2T	71	6324-15SUBC/S400-X10	142	67-22ST/KK8C-5M3013068Z15/2T	58
45-21S/KK2C-H4040L9N3B2Z6/2T	71	6324-15SUGC/S400-A6	142	67-22ST/KK8C-5M3013568Z15/2T	58
45-21S/KK2C-H5050L9N3B2Z6/2T	71	6324-15SURC/S400-A9	142	67-22ST/KK8C-5M3014568Z15/2T	58
45-21S/KK2C-H5757L9N3B2Z6/2T	71	6324-15UYC/S530-A6	142	67-22ST/KK8C-5M3513068Z15/2T	58
45-21S/KK2C-H6565L9N3B2Z6/2T	71	65-11/BHC-AR1S2B2/2T	94	67-22ST/KK8C-5M3513568Z15/2T	58
48-213/BHC-ZM2P1QY/3C	124	65-11/T2C-FV1W2E/2T	94	67-22ST/KK8C-5M3514068Z15/2T	58
48-213/R6C-AM1N2VY/3C	124	65-11-C70200H-AM	176	67-22ST/KK8C-5M3515068Z15/2T	58
48-213/T7D-BQ1R2QY/3C	124	65-11-IB0100L-AM	176	67-22ST/KK8C-5M4013568Z15/2T	58
484-10SURT/S530-A3	135	65-11-SB0100L-AM	176	67-22ST/KK8C-5M4014068Z15/2T	58
484-10SYGT/S530-E2	135	65-11-UB0200L-AM	176	67-22ST/KK8C-5M4014568Z15/2T	58
484-10UYOC/S530-A3	135	65-11-UG0200H-AM	176	67-22ST/KK8C-5M4015568Z15/2T	58
484-10UYT/S530-A3	135	65-21/BHC-FS/T1B14/2T	95	67-22ST/KK8C-5M5013568Z15/2T	58
494-10SURT/S530-A3	135	65-21/G6C-AN2Q1/3T	95	67-22ST/KK8C-5M5014068Z15/2T	58
494-10SYGT/S530-E2	135	65-21/R6C-AQ1R2B/2T	95	67-22ST/KK8C-5M5014568Z15/2T	58
494SUBC/C470/S400-A4	135	65-21/Y2SC-AR1S2B/2T	95	67-22ST/KK8C-5M5015568Z15/2T	58
50-217S/KKE-B303032Z6/SZM/2T	66	65-21-UR0200H-AM	176	67-22ST/KK8C-5M5713568Z15/2T	58
50-217S/KKE-B353032Z6/SZM/2T	66	65-21-UY0200H-AM	176	67-22ST/KK8C-5M5714068Z15/2T	58
50-217S/KKE-B403232Z6/SZM/2T	66	67-11/BHC-FQ2S1F/2T	95	67-22ST/KK8C-5M5714568Z15/2T	58
50-217S/KKE-B433232Z6/SZM/2T	66	67-11/W1C-ES1T2N/2T	95	67-22ST/KK8C-5M5715568Z15/2T	58
50-217S/KKE-B503232Z6/SZM/2T	66	67-11/W1C-FV1W2F/2T	95	67-22ST/KK8C-5M6013568Z15/2T	58
50-217S/KKE-B633232Z6/SZM/2T	66	67-11-C70100H-AM	176	67-22ST/KK8C-5M6014068Z15/2T	58
50-217S/KKE-B653232Z6/SZM/2T	66	67-11-C70200H-AM	176	67-22ST/KK8C-5M6014568Z15/2T	58
50-217ST/KK5C-H275534Z15/2T	66	67-11-IB0100L-AM	176	67-22ST/KK8C-5M6015568Z15/2T	58
50-217ST/KK5C-H306034Z15/2T	66	67-11-SB0100L-AM	176	67-22ST/KK8C-5M6513068Z15/2T	58
50-217ST/KK5C-H406534Z15/2T	66	67-11S-G81000H-AM	177	67-22ST/KK8C-5M6513568Z15/2T	58
50-217ST/KK5C-H506534Z15/2T	66	67-11S-IB0600H-AM	177	67-22ST/KK8C-5M6514068Z15/2T	58
50-217ST/KK5C-H576534Z15/2T	66	67-11S-PA1500H-AM	177	67-22ST/KK8C-5M6515068Z15/2T	58
50-217ST/KK5C-H656534Z15/2T	66	67-11-UB0200H-AM	176	67-22ST/KK9C-H278030Z15/2T(EMM)	56
5050/RGBWD-A100/ET	72	67-11-UG0200H-AM	176	67-22ST/KK9C-H308530Z15/2T(EMM)	56
513SURD/S530-A3	144	67-13S-BYGRRTNW-M101520-2T8-CS	99	67-22ST/KK9C-H358530Z15/2T(EMM)	56
513SYGD/S530-E2	144	67-21/B7C-AS2U1N/2T	96	67-22ST/KK9C-H409030Z15/2T(EMM)	56
513UYD/S530-A3	144	67-21/GBC-YY2W2N/2T	96	67-22ST/KK9C-H509030Z15/2T(EMM)	56
519-1SURSYGW/S530-A3	144	67-21/R6C-FN2Q1BZ/2T	96	67-22ST/KK9C-H579030Z15/2T(EMM)	56
523-2SDRD/S530-A3	144	67-21/RSC-FT2V1B/2T	96	67-22ST/KK9C-H658830Z15/2T(EMM)	56
523-2SUBD/C470/S400-A6	144	67-21/S2C-AQ2S1B/2T	96	67-22ST/KKE-5M273229Z6/2T	55
523-2SUGD/S400-A6	144	67-21/T2C-ZV1W2E/2T	96	67-22ST/KKE-5M303329Z6/2T	55
523-2SURD/S530-A3	144	67-21/YSC-FU1V2B/2T	96	67-22ST/KKE-5M353529Z6/2T	55
523-2UYD/S530-A3	144	67-21S/B3C-D4555D5D72936Z6/2T	54	67-22ST/KKE-5M403629Z6/2T	55
523SYGD/S530-E2	144	67-21S/NB3C-D6575B8L52936Z15/2T	54	67-22ST/KKE-5M503629Z6/2T	55
523UYD/S530-A3	144	67-21S/NDR2C-P5080B2C12029Z6/2T	54	67-22ST/KKE-5M573629Z6/2T	55
5484BN/BADC-AGJA/P/MS	173	67-21S/NDR3C-P5080C1C51827Z15/2T	54	67-22ST/KKE-5M653529Z6/2T	55
5484BN/GADC-AMNA/P/MS	173	67-21S/NFR2C-P2050A3B21522Z6/2T	54	67-22ST/KKE-N27120380U2/SZM/2T	61
5484BN/R7DC-AHJB/P/MS	173	67-21S/NG3C-D2035N3PB2936Z15/2T	54	67-22ST/KKE-N2765200Z3/SZM/2T	57
5515-RGB020AH-AM	181	67-21S/NY3C-D9000L2L81828Z15/2T	54	67-22ST/KKE-N30125380U2/SZM/2T	61
57-11-C70200H-AM	179	67-21S/R2C-D2030B8L31926Z6/2T	54	67-22ST/KKE-N3065200Z3/SZM/2T	57
57-11-IB0100L-AM	179	67-21S/Y2C-D8595B7L32128Z6/2T	54	67-22ST/KKE-N40130380U2/SZM/2T	61
57-11-SB0100L-AM	179	67-21ST/KK6C-H277096Z6/2T	56	67-22ST/KKE-N4070200Z3/SZM/2T	57
57-11-UB0200H-AM	179	67-21ST/KK6C-H307396Z6/2T	56	67-22ST/KKE-N50130380U2/SZM/2T	61
57-11UTC/S827-1/TR8	102	67-21ST/KK6C-H407696Z6/2T	56	67-22ST/KKE-N5070200Z3/SZM/2T	57
57-21/R6C-AP1Q2B/BF	102	67-21ST/KK6C-H507696Z6/2T	56	67-22ST/KKE-N65130380U2/SZM/2T	61
57-21SYGC/S530-E3/TR8	102	67-21ST/KK6C-H577696Z6/2T	56	67-22ST/KKE-N6570200Z3/SZM/2T	57
57-21-UR0200H-AM	179	67-21-UR0200H-AM	176	67-22ST/KKES-5M27118190Z5/2T	60
57-21-UY0200H-AM	179	67-21-UY0200H-AM	176	67-22ST/KKES-5M27130190Z5/2T	60

VISIBLE LED

67-22ST/KKES-5M30123190Z5/2T	60	67-24ST/KKE-5M50175720U1/2T	62	A203B/SUR/S530-A3	148
67-22ST/KKES-5M30135190Z5/2T	60	67-24ST/KKE-5M57175720U1/2T	62	A203B/SYG/S530-E2	148
67-22ST/KKES-5M35128190Z5/2T	60	67-24ST/KKE-5M65175720U1/2T	62	A203B/UY/S530-A3	148
67-22ST/KKES-5M35140190Z5/2T	60	67-24ST/KKE-N27130130Z8/SZM/2T	60	A214B/SUG/S400-X6	146
67-22ST/KKES-5M40133190Z5/2T	60	67-24ST/KKE-N30135130Z8/SZM/2T	60	A214B/UY/S530-A3	146
67-22ST/KKES-5M40145190Z5/2T	60	67-24ST/KKE-N35135130Z8/SZM/2T	60	A253B/SUBC/S400-A6	149
67-22ST/KKES-5M50133190Z5/2T	60	67-24ST/KKE-N40140130Z8/SZM/2T	60	A253B/SYG/S530-E2	149
67-22ST/KKES-5M50145190Z5/2T	60	67-24ST/KKE-N50140130Z8/SZM/2T	60	A264B/SUB/S400-A4	146
67-22ST/KKES-5M57133190Z5/2T	60	67-24ST/KKE-N65140130Z8/SZM/2T	60	A264B/SUR/S530-A3	146
67-22ST/KKES-5M57145190Z5/2T	60	67-31A/B7C-AT1U2MZ3/2T	96	A264B/SYG/S530-E2	146
67-22ST/KKES-5M60133190Z5/2T	60	67-31A/GHC-YV1W2EZ3/2T	96	A264B/UY/S530-A3	146
67-22ST/KKES-5M60145190Z5/2T	60	67-31A/SAC-AW1X2B9Z5/2T	96	A274B/SYG/S530-E2	146
67-22ST/KKES-5M65128190Z5/2T	60	67-31E/RSC-AV1W2B9Z5/2T	97	A694B/2SUR/S530-A3	147
67-22ST/KKES-5M65140190Z5/2T	60	67-31EP3-UR0500H-AM	183	A694B/2SYG/S530-E2	147
67-22ST/KKX-N277530Z15/2T	55	67-31EP3-UY0500H-AM	183	A694B/2UY/S530-A3	147
67-22ST/KKX-N308030Z15/2T	55	67-41-C70301H-AM	183	A694B/SURSYG/S530-A3	147
67-22ST/KKX-N358030Z15/2T	55	67-41-PA0601H-AM	183	A694B/SYGUY/S530-A3	147
67-22ST/KKX-N408530Z15/2T	55	67-41-SR0501H-AM	183	A93B/SUB/S400-A6	149
67-22ST/KKX-N508530Z15/2T	55	67-41-UR0501H-AM	183	A93B/SUR/S530-A3	149
67-22ST/KKX-N578530Z15/2T	55	67-41-UR0502H-AM	183	A93B/SYG/S530-E2	149
67-22ST/NFR3C-P2050C1C41827Z15/2T	54	67-41-UY0501H-AM	183	A93B/UY/S530-A3	149
67-22UYSYGC/S530-A5/TR8	98	67-63-RGB0201H-AM	180	ALFS1BD-C010001L1-AM	188
67-23/R6GHBHC-B05/2T	100	7343/B1C2-APSA/MS	174	ALFS1E-C07001H-AM	189
67-235-BJRQGCC-A01E-2T8-CS	99	7343/R5C2-ASUB/MS	174	ALFS1E-PA07001H-AM	189
67-23SDRSYGUBC/TR8	100	7343/Y5C2-ASVB/MS	174	ALFS1G-C010001H-AM	189
67-23ST/KKE-H27140550Z2/2T	61	7343-2SUGD/S400-X6	142	ALFS1G-PA10001H-AM	189
67-23ST/KKE-H30145550Z2/2T	61	7343-2SURD/S530-A3	142	ALFS1H-C010001H-AM	190
67-23ST/KKE-H35150550Z2/2T	61	7343-2USOC/S530-A3	142	ALFS1J-C010001H-AM	192
67-23ST/KKE-H40155550Z2/2T	61	7343M/BAC3-ATVA/C5	142	ALFS2BD-C010001H-AM	188
67-23ST/KKE-H50155550Z2/2T	61	7344/V7C2-ASVA/MS	174	ALFS2BD-C0PA07001L1-AM	188
67-23ST/KKE-H57155550Z2/2T	61	7344-15SUBC/C470/S400-A6	142	ALFS2G-C010001H-AM	190
67-23ST/KKE-H65155550Z2/2T	61	7344-15SUGC/S400-A5	142	ALFS2H-C010001H-AM	191
67-23ST/KKX-5M2714096Z10/2T	59	7344-15SUGC/S400-X6	142	ALFS2HT-C010001H-AM	193
67-23ST/KKX-5M2714596Z10/2T	59	7383/BAC3-ANQA/MS	174	ALFS2J-C010001H-AM	192
67-23ST/KKX-5M2715096Z10/2T	59	7383/G1C3-ATVA/MS	174	ALFS3H-C010001H-AM	191
67-23ST/KKX-5M3014596Z10/2T	59	7383/R7C3-ARUB/MS	174	ALFS3HT-C010001H-AM	193
67-23ST/KKX-5M3015096Z10/2T	59	7383/V7C3-ARTA/MS	174	B0603BWN1-GC5253452705-T	105
67-23ST/KKX-5M3015596Z10/2T	59	7383/Y7C3-ARUB/MS	174	B1001SDRWB/S530-A3	161
67-23ST/KKX-5M3515096Z10/2T	59	91-21SUGC/S400-A4/TR7	87	B1001SURWB/S530-A3	161
67-23ST/KKX-5M3515596Z10/2T	59	91-21SURC/S530-A6/TR7	87	B1001SYGWA/S530-E2	161
67-23ST/KKX-5M3516096Z10/2T	59	91-21SYGC/S530-E4/TR7	87	B1001UBWA/C470	161
67-23ST/KKX-5M4015596Z10/2T	59	91-21UYC/S530-A6/TR7	87	B1001USOWA/S530-A4	161
67-23ST/KKX-5M4016096Z10/2T	59	93-22SURSYGC/S530-A3/TR8	103	B1001UYWA/S530-A3	161
67-23ST/KKX-5M4016596Z10/2T	59	95-21SURC/S530-A6/TR7	87	B1010BWN3A1-GRBC0105-T	121
67-23ST/KKX-5M5015596Z10/2T	59	95-21SYGC/S530-E3/TR9	87	B1010DWN3S2-RBGC0105-5T	89
67-23ST/KKX-5M5016096Z10/2T	59	95-21UYC/S530-A5/TR7	87	B1010SURD/S530-A3	161
67-23ST/KKX-5M5016596Z10/2T	59	99-218/B2C-AQ1Q2DY/2C	103	B1010SYGD/S530-E2	161
67-23ST/KKX-5M5715596Z10/2T	59	99-218/RSC-DQ2R2BY/2C	103	B1010UYD/S530-A3	161
67-23ST/KKX-5M5716096Z10/2T	59	99-218/Y2SC-AR21B23/2C	103	B1212CWN4A1-BGRWD0105-3T	93
67-23ST/KKX-5M5716596Z10/2T	59	99-218-BUT-MVAWBWA7E-2G-CS	103	B1410FBN4A1-RGBWD0205-4T	92
67-23ST/KKX-5M6015596Z10/2T	59	99-235-RSHBOGSC-A20-2H-CS	104	B1414DWN3S2-RBGC0112-2T	88
67-23ST/KKX-5M6016096Z10/2T	59	A09K-C71501H-AM	184	B1609FBCN1-OC60610022405-3T	131
67-23ST/KKX-5M6016596Z10/2T	59	A09K-PA1501H-AM	184	B1609FBCN1-PGC5556032205-3T	131
67-23ST/KKX-5M6515096Z10/2T	59	A09K-SR1501H-AM	184	B1609FBCZ1-WP2329023005-3T	131
67-23ST/KKX-5M6515596Z10/2T	59	A09K-UR1501H-AM	184	B1818IC/RSGBHC-5V01/2T	88
67-23ST/KKX-5M6516096Z10/2T	59	A09K-UY1501H-AM	184	B2706MWN4A2-RBGWS0105-3C	92
67-24ST/KKE-5M27160720U1/2T	62	A1394B/3SUR/S530-A3	147	B3010PWN3S1-GRBS0112-2D	89
67-24ST/KKE-5M30165720U1/2T	62	A1394B/3SYG/S530-E2	147	BL-2016NN1T	202
67-24ST/KKE-5M35170720U1/2T	62	A1479-1B/SURSYGW/S530-A3	149	BL-2604DN1P	198
67-24ST/KKE-5M40175720U1/2T	62	A1844B/4SYG/S530-E2	148	BL-2835LN1CTBC	203

ALPHANUMERIC INDEX

VISIBLE LED

BL-2835SN1T	202	D425SDRWA/S530-A4	153	ELUA2016OGB-P6070R13040060-V21M	75
BL-3003LM2C	198	D425SDRWB/A3/S660	153	ELUA2016OGB-P6070T53240500-VD1M	75
BL-3004TN1P	197	D425SURWA/S530-A3	153	ELUA2016OGB-P8090Q53040020-VA1M	75
BL-3006NN1P	197	D425SYGWA/S530-E2	153	ELUA2016OGB-P8090R43040060-V21M	75
BL-3030GN2E	194	D425USOWA/S530-A4	153	ELUA2016OGB-P8090T73240500-VD1M	75
BL-3804GN1P	197	D426SURWB/S530-A3	153	ELUA2016OGB-P9000Q53040020-VA1M	75
BL-3806NN1P	196	D426SURWB/S530-A3	153	ELUA2016OGB-P9000R53040060-V21M	75
BL-3808Z1P	196	D426SYGWA/S530-E2	153	ELUA2016OGB-P9000T73240500-VD1M	75
BL-4012NN1T	194	D426SYGWA/S530-E2	153	ELUA2835TG0-P0010R53040060-VA1D	76
BL-4014CZ1T	194	D426USOWA/S530-A3	153	ELUA2835TG0-P0010S83040200-V22D	75
BL-4206SN2P	196	D426UYOWB/S530-A3	153	ELUA2835TG0-P1020S83040200-V22D	75
BL-7016NZ2T	195	D426UYOWB/S530-A3	153	ELUA2835TG0-P6070R53040060-VA1D	76
BL-7020NZ1T	195	D511SDRWB/A3/S982	154	ELUA2835TG0-P6070SC13040150-VA1D	76
BLA-1515WRON2EMHBC	201	D511SURWB/S530-A3	154	ELUA2835TG0-P8090R53040060-VA1D	76
BLA-2016NZ1CTHBC	200	D511SYGWA/S530-E2	154	ELUA2835TG0-P9000R53040060-VA1D	76
BLA-2016NZ1THBC	200	D511SYGWB/S530-E2	154	ELUA3535NU3-P0010U736481K0-V41G	78
BLA-2810NZ1T	199	D511UBWA/C470	154	ELUA3535NU3-P6070U23648700-V41G	78
BLA-2835NZ1THBC	201	D511USOWA/S530-A4	154	ELUA3535NU3-P8090U5136481K0-V41G	78
BLA-2835NZ1THBC	201	D511UTWA/T5/S700/S1025	154	ELUA3535NU3-P9000U5136481K0-V41G	78
BLA-3014PZ1U	199	D512SDRWB/S530-A3	154	ELUA3535NU6-P0010U5136481K0-V41G	78
BLA-4014PZ1E	199	D512SURWB/S530-A3	154	ELUA3535NU6-P6070U23648700-V41G	78
C1608EDWN1-BC46472243620-T	98	D512SYGWB/E2/S962	154	ELUA3535NU6-P8090U736481K0-V41G	78
C1608EDWN1-WP30301803420-2T	98	D515SURWA/S530-A3	155	ELUA3535NU6-P9000U736481K0-V41G	78
C1608-GCZ0ABK4E-2T	98	D525SURWA/S530-A3	155	ELUA3535OG5-P0010U23240500-VD1M	77
C1616EFWN3-RGBD0610-2T	101	D525SYGWA/S530-E2	155	ELUA3535OG5-P6070U13240500-VD1M	77
C1818FDWN3S1-RGBC0120-T	91	D525USOWA/S530-A3	155	ELUA3535OG5-P8090U23240500-VD1M	77
C2016EDWN1-RC61620182306-3T	97	D526SURWA/S530-A3	155	ELUA3535OG5-P9000U23240500-VD1M	77
C2121JDWN3A1-RGBD020202-3T	101	D526USOWA/S530-A4	155	ELUA3535OGB-P0010U23240500-VD1M	77
C3005DDWN3A3-RGBD0120-2G	104	EL3534-RGBISE0141L-8H-AM	180	ELUA3535OGB-P6070U23240500-VD1M	77
C3227TDWN3S1-GRBC0112-2T	90	EL3534-RGBISE0201H-8H-AM	180	ELUA3535OGB-P8090U23240500-VD1M	77
C3231FFWN4A5-RGBWC0120-1T	93	ELSWF-J61M1-6FPGS-C2700	69	ELUA3535OGB-P9000U23240500-VD1M	77
C3528SDWN3-RGBC0220-2T	100	ELSWF-J61M1-6FPGS-C2700	69	ELUC3535NUB-P7085Q47090300-F23D	81
C4506FDWN301-GRBD01302017-2G	104	ELSWF-J61M1-6FPGS-C2700	70	ELUC3535NUB-P7085Q05075020-S21Q	80
C4506RGBW-DP02-2G(AES)	94	ELSWF-J61M1-6FPGS-C3000	69	ELUC3535NUB-P7085Q15070100-S22Q	81
C4516SDWN3S1-RGBC0120-2H	91	ELSWF-J61M1-6FPGS-C3000	69	F415SURWA/S530-A3	158
C5050RDWN3S2-RGBC0120-T	90	ELSWF-J61M1-6FPGS-C3000	70	F415SURWB/S530-A3	158
C7024SDWN3S1-RGBC0118-05H	91	ELSWF-J61M1-6FPGS-C3500	69	F415UYOWB/S530-A3/S715	158
CH1210E-C80401H-AM	186	ELSWF-J61M1-6FPGS-C3500	69	F416SURWA/S530-A3	158
CH1210E-N80401H-AM	186	ELSWF-J61M1-6FPGS-C3500	70	F416SURWB/S530-A3	158
CH1210E-PA0801H-AM	186	ELSWF-J71N1-6FPGS-C4000	69	F416SYGWA/S530-E3	158
CH1210E-PR0801H-AM	186	ELSWF-J71N1-6FPGS-C4000	69	F416USRWA/S530-A3	158
CH1216-C8W80801H-AM	179	ELSWF-J71N1-6FPGS-C4000	70	F416UYWB/S530-A3/P53	158
CH2525E-RGBW0401H-AM	182	ELSWF-JJ1C1-6FPGS-C5000	69	F511SDRWB/S530-A3	159
CH2924-C0PA3501H-AM	186	ELSWF-JJ1C1-6FPGS-C5000	69	F511SURWA/S530-A3	159
CH3535E-SR3501L-AM	187	ELSWF-JJ1C1-6FPGS-C5000	70	F511SURWB/S530-A3	159
CH3535E-UR3501L-AM	187	ELSWF-JJ1C1-6FPGS-C5700	69	F511SYGWA/S530-E2	159
CSP0603AN101-BP44460093001-3T	131	ELSWF-JJ1C1-6FPGS-C5700	69	F512SDRWB/S530-A3	159
CSP0603AN101-GP52543552705-3T	131	ELSWF-JJ1C1-6FPGS-C5700	70	F512SUBWB/X9/S800	159
CSP0603AN101-RP61630902505-3T	131	ELSWF-JJ1C1-6FPGS-C6500	69	F512SURWA/S530-A3	159
CSP0603AN101-WP30300563001-3T	131	ELSWF-JJ1C1-6FPGS-C6500	69	F512SYGWA/S530-E2	159
CSP0603AN101-YP58600283001-3T	131	ELSWF-JJ1C1-6FPGS-C6500	70	FC1414G	83
CSP0806AN301-RGBC0101-T	132	ELSWF-R61L1-6FPNM-CB4B6	73	FC1610HF13HP	83
CSP1005BN101-BP44460563140-3T	132	ELSWF-S41L2-6FPNM-DB4B6	74	FC2016GF13HP	82
CSP1005BN101-WP35403553005-3T	132	ELSWNS-S11E2-6VPM-AD308	74	FC2016GF13HP	82
D305SDRWB/S530-A3	152	ELSW-Q91E1-0LPNM-AD3D8	73	FC2016GF13MP	82
D305SURWA/S530-A3	152	ELSW-R21E1-0EPNM-AD3D8(OR)	73	FC2016GF13MP	82
D305SYGWA/E2/S660	152	ELUA2016OGB-P0010Q53040020-VA1M	75	FE1919EF14ZP	84
D306SURWA/S530-A3	152	ELUA2016OGB-P0010R53040060-V21M	75	FE1919EF162P	84
D306USOWA/S530-A3	152	ELUA2016OGB-P0010T73240500-VD1M	75	FN1111	84
D306UYWA/S530-A3	152	ELUA2016OGB-P6070Q43040020-VA1M	75	FN1212	85

VISIBLE LED

FN1414	85	SS406UYWA/S530-A4/S290	163	XI3030P/KKX-5M303729U6/2T	63
FN1414G	86	SS506SURWA/S530-A4/S290	164	XI3030P/KKX-5M403929U6/2T	63
FN1919	86	SS506SYGWA/S530-E2	164	XI3030P/KKX-5M503929U6/2T	63
G67-12S/G2C-D1525L4L82934Z6/2T	54	SS506UTWA/T5/S290	164	XI3030P/KKX-5M573929U6/2T	63
G67-21S/R3C-D1530L6M41829Z15/2T	54	SS511SURWA/S530-A3/S290	164	XI3030P/KKX-5M653829U6/2T	63
HNA2121W-IS01	169	SS511SYGWA/S530-E2/S290	164	XI3030P/O3C-D0520N3PB15281Z15/2N	65
HNB1515W-OS01	168	SS511UBWA/C470	164	XI3030P/R3C-D1530L7N315281Z15/2N	65
HNB1921W-OS03	168	SS512SURWA/S530-A3/S290	164	XI3030-PA1501M-AM	185
HNB2727W-OS01-FM00	169	SS512SYGWA/S530-E2	164	XI3030-PA3501H-AM	185
HPL3535CZ12-LW30170X33350-1T	70	ST405SUGWA/S530-A4/S290	166	XI3030PF/KK8C-5M303828U6/2N	63
HPL3535CZ12-LW40175X33350-1T	70	ST405SYGWA/S530-E2	166	XI3030PF/KK8C-5M404028U6/2N	63
HPL3535CZ12-LW50180X33350-1T	70	ST405UYOWA/S530-A3/S290	166	XI3030PF/KK8C-5M504028U6/2N	63
HPL3535CZ12-LW57180X33350-1T	70	ST406SURWA/S530-A3/S290	166	XI3030PF/KK8C-5M653928U6/2N	63
HPL3535CZ12-LW65180X33350-1T	70	ST406SYGWA/S530-E2	166	XI3030-RGB200BH-AM	181
HPND3535CZ0112-NDR55651K0X24700-4H(EU)	73	ST512SURWA/S530-A3/S290	166	XI3030-SR3501H-AM	185
M2881SURWA/S530-A3	160	ST512SYGWA/S530-E2/S290	166	XI3030-UR3501H-AM	185
M2881SYGWA/S530-E2	160	ST512UBWA/C470/S290	166	XI3535-W03501H-AM	178
M2881UYWA/S530-A3	160	T315SDRWA/S530-A3	156	XI5050/LK5C-H406907Z275/2N	68
M2882SYGWA/S530-E2	160	T315SURWA/S530-A3	156	XI5050/LK5C-H506907Z275/2N	68
S1006SDRDB/A3/S660	150	T315SYGWA/S530-E2	156	XI5050/LK5C-H656907Z275/2N	68
S1006SURWA/S530-A3	150	T315UYOWA/S530-A3	156	XI5050E/LKE-H27770260Z18/2N	68
S1006SYGWA/S530-E2	150	T315UYWA/S530-A3	156	XI5050E/LKE-H30800260Z18/2N	68
S2326SURWA/S530-A3	150	T316SDRWA/S530-A3	156	XI5050E/LKE-H35830260Z18/2N	68
S2326SYGWA/S530-E2	150	T316SURWA/S530-A3	156	XI5050E/LKE-H40860260Z18/2N	68
S2326UBWA/C470	150	T316SYGWA/S530-E2	156	XI5050E/LKE-H50860260Z18/2N	68
S2326USOWA/S530-A4	150	T511SDRWA/S530-A3	157	XI5050E/LKE-H57860260Z18/2N	68
S315SURWA/S530-A3	150	T511SUGWB/S400-A4/S800	157	XI5050E/LKE-H65830260Z18/2N	68
S315SYGWA/S530-E2	150	T511SURWA/S530-A3	157	XI5050EE/LKE-H2720560Z18/2N	67
S321SURWA/S530-A3	151	T511SYGWA/S530-E2	157	XI5050EE/LKE-H3021560Z18/2N	67
S321USOWA/S530-A4	151	T511UYOWA/S530-A3	157	XI5050EE/LKE-H3522060Z18/2N	67
S322SURWA/S530-A3	151	T512SDRWB/A3	157	XI5050EE/LKE-H4023060Z18/2N	67
S322SYGWA/S530-E2	151	T512SUBWA/X9	157	XI5050EE/LKE-H5023060Z18/2N	67
SD405SDRWB/S530-A3/S968	165	T512SURWA/S530-A3	157	XI5050EE/LKE-H5722560Z18/2N	67
SD405SURWA/S530-A3/S290	165	T512SURWB/S530-A3	157	XI5050EE/LKE-H6522560Z18/2N	67
SD405SYGWA/S530-E2	165	T512SYGWA/S530-E2	157		
SD406SURWA/S530-A4/S290	165	T512SYGWB/S530-E2	157		
SD406SYGWA/S530-E2/S290	165	T512USOWA/S530-A4	157		
SD406UWWA/S290	165	T512UYOWA/S530-A3	157		
SD511SYGWA/S530-E2/S290	165	UVA2835TZ0112-PUA6570120X38060-2T	76		
SF406SURWA/S530-A3/S290	167	UVB3535CZ0112-FUB0015001X75020-1T	79		
SF405UYOWA/A3/S290	167	UVB3535CZ0115-HUB0015006X75100-2T	79		
SF511SURWA/S530-A3/S290	167	XI3030-C01501M-AM	185		
SF511SYGWA/S530-E2/S796	167	XI3030-C03501H-AM	185		
SF512SURWA/S530-A3/S290	167	XI3030E/LKE-H2715068Z15/2T	64		
SF512SYGWA/S530-E2/S290	167	XI3030E/LKE-H3015568Z15/2T	64		
SS205SUBWA/S400-A3/S669	162	XI3030E/LKE-H3516068Z15/2T	64		
SS205SURWA/S530-A3/S290	162	XI3030E/LKE-H4016568Z15/2T	64		
SS205SYGWA/S530-E2/S290	162	XI3030E/LKE-H5016568Z15/2T	64		
SS205UYOWA/S530-A3/S290	162	XI3030E/LKE-H5716568Z15/2T	64		
SS205UYWA/S530-A3/S290	162	XI3030E/LKE-H6516068Z15/2T	64		
SS206SURWA/S530-A3/S290	162	XI3030P/B3C-D5060T2T62531Z15/2N	65		
SS206SYGWA/S530-E2/S290	162	XI3030P/D3C-P4575S1S621271Z15/2N	65		
SS206SURWA/S530-A3/S290	162	XI3030P/F3C-P1545R5S115251Z15/2N	65		
SS405SURWA/S530-A3/S290	163	XI3030P/G3C-D1530P3R128371Z15/2N	65		
SS405SYGWA/S530-E2	163	XI3030P/KK7C-H2713566Z15/2N	64		
SS406SURWA/S530-A3/S290	163	XI3030P/KK7C-H3014066Z15/2N	64		
SS406SYGWA/S530-E2	163	XI3030P/KK7C-H4014566Z15/2N	64		
SS406UBWA/C470/S290	163	XI3030P/KK7C-H5014566Z15/2N	64		
SS406USRWA/S530-A3/S290	163	XI3030P/KK7C-H5714566Z15/2N	64		
SS406UWWA/S290	163	XI3030P/KK7C-H6514566Z15/2N	64		

ALPHANUMERIC INDEX

INFRARED LED, SENSORS, COUPLERS, DIGITAL ISOLATOR

4N25	272	CE8642MH(TA)-G	301	EL1110-G	269
4N26	272	CE8642ML(TA)-G	301	EL1112-G	269
4N27	272	CEK79	303	EL1113-G	269
4N28	272	CEK87	303	EL1114-G	269
4N29	277	CEN8340EL(TA)-G	302	EL1116-G	269
4N30	277	CEN8340ML(TA)-G	302	EL1117-G	269
4N31	277	CEN8342EL(TA)-G	302	EL1118-G	269
4N32	277	CEN8342ML(TA)-G	302	EL1119-G	269
4N33	277	CEQ8340EL(TA)-G	302	EL121N-G	265
4N35	272	CEQ8340ML(TA)-G	302	EL205	266
4N36	272	CEQ8341EL(TA)-G	302	EL206	266
4N37	272	CEQ8341ML(TA)-G	302	EL207	266
4N38	272	CEQ8342EL(TA)-G	302	EL208	266
6N135	281	CEQ8342ML(TA)-G	302	EL211	266
6N136	281	CLS15-22C/L213B/TR8	260	EL212	266
6N137	281	CLS15-22C/L213G/TR8	260	EL213	266
6N138	282	CLS15-22C/L213R/TR8	260	EL215	266
6N139	282	CLS-16D24-44-DF8/TR8	261	EL216	266
ALS-PDIC17-78C/L749/TR8	259	CNY17-1	272	EL217	266
ALS-PDIC144-6C/L378	258	CNY17-2	272	EL2200	283
ALS-PDIC15-21C/L230/TR8	256	CNY17-3	272	EL2201	283
ALS-PDIC17-51B/L758/TR8	256	CNY17-4	272	EL2202	283
ALS-PDIC17-55C/TR8	256	CNY17F-1	272	EL2530	282
ALS-PDIC17-77B/TR8	257	CNY17F-2	272	EL2531	282
ALS-PDIC17-77C/TR8	257	CNY17F-3	272	EL2601	281
ALS-PDIC243-3B	259	CNY17F-4	272	EL2611	281
ALS-PDIC243-3B/L716	259	CNY64	274	EL2630	282
ALS-PDT144-6C/L451	258	CNY64S	274	EL2631	282
ALS-PDT243-3C/L451	258	CNY65	274	EL2751	286
ALS-PT19-315C/L177/TR8	257	ECD04Tx20F/TB	249	EL2HK-G	264
APM-16D24-310-DF8/TR8	262	EL0452	279	EL2K-G	271
APM-16D24-U6E-DF8/TR8	262	EL0453	279	EL3010	289
B-CPS2020C1-L992-D-2R	261	EL0500	279	EL3010(P5)	288
B-IRRG1816CW3-L885-TR8	217	EL0501	279	EL3011	289
B-IRRG2020CW4-L885-3T	217	EL0530	280	EL3011(P5)	288
B-PD322006C1/L917/135/3T	226	EL0531	280	EL3012	289
B-PM1914B3/L973-A-3R	261	EL0600	279	EL3012(P5)	288
BR15-22C/L586/R/TR8	218	EL0601	279	EL3020	289
CE08320EH(TA)-G	300	EL0611	279	EL3021	289
CE08320EL(TA)-G	300	EL0631	280	EL3021(P5)	288
CE08320MH(TA)-G	300	EL0700	280	EL3022	289
CE08320ML(TA)-G	300	EL0701	280	EL3022(P5)	288
CE08321EH(TA)-G	300	EL083L	280	EL3023	289
CE08321MH(TA)-G	300	EL1010-G	268	EL3023(P5)	288
CE08322EH(TA)-G	300	EL1010H-G	268	EL3031	289
CE08322EL(TA)-G	300	EL1010-TG	268	EL3031(P5)	288
CE08322MH(TA)-G	300	EL1012-G	268	EL3032	289
CE08322ML(TA)-G	300	EL1012-TG	268	EL3032(P5)	288
CE21550A	303	EL1013-G	268	EL3033	289
CE21550B	303	EL1013-TG	268	EL3033(P5)	288
CE8322EH(TA)-G	301	EL1014-G	268	EL3041	289
CE8322EL(TA)-G	301	EL1014-TG	268	EL3041(P5)	288
CE8322MH(TA)-G	301	EL1017-G	268	EL3042	289
CE8322ML(TA)-G	301	EL1017-TG	268	EL3042(P5)	288
CE8640EL(TA)-G	301	EL1018-G	268	EL3043	289
CE8640ML(TA)-G	301	EL1018-TG	268	EL3043(P5)	288
CE8641EH(TA)-G	301	EL1019-G	268	EL3051	289
CE8641MH(TA)-G	301	EL1019-TG	268	EL3051(P5)	288
CE8642EH(TA)-G	301	EL101L-G	268	EL3052	289
CE8642EL(TA)-G	301	EL101U-G	268	EL3052(P5)	288

INFRARED LED, SENSORS, COUPLERS, DIGITAL ISOLATOR

EL3053	289	EL815-G	276	ELQ3H5-G	275
EL3053(P5)	288	EL816-G	270	ELQ3H7-G	264
EL3061	289	EL817-G	270	ELR0213	291
EL3061(P5)	288	EL817H-G	270	ELR0223	291
EL3062	289	EL817L-G	270	ELR1213	291
EL3062(P5)	288	EL825	277	ELR1223	291
EL3063	289	EL827	273	ELR2213	291
EL3063(P5)	288	EL840A	294	ELR2223	291
EL3071	289	EL847	273	ELR3213	291
EL3071(P5)	288	EL851-G	270	ELR3223	291
EL3072	289	EL852-G	276	ELS3120	295
EL3072(P5)	288	EL860A	294	ELS3121	295
EL3073	289	ELC101-G	268	ELS3150	295
EL3073(P5)	288	ELC357N-G	265	ELS3151	295
EL3081	289	ELC3H7-G	263	ELS456	285
EL3081(P5)	288	ELC816-G	270	ELS511	285
EL3082	289	ELD205	267	ELS611	285
EL3082(P5)	288	ELD206	267	ELS680	285
EL3083	289	ELD207	267	ELT3021	287
EL3083(P5)	288	ELD211	267	ELT3022	287
EL3120	295	ELD213	267	ELT3023	287
EL3121	295	ELD217	267	ELT3041	287
EL3150	295	ELH3170	297	ELT3042	287
EL3151	295	ELH61A	286	ELT3043	287
EL354N-G	265	ELK7840	299	ELT3051	287
EL357N-G	265	ELL200	298	ELT3052	287
EL357NH-G	265	ELL300	298	ELT3053	287
EL357NL-G	265	ELM2K-G	266	ELT3061	287
EL357NU-G	265	ELM2KL-G	269	ELT3062	287
EL3H4-G	263	ELM3022	290	ELT3063	287
EL3H4U-G	263	ELM3023	290	ELT3081	287
EL3H5-G	275	ELM3024	290	ELT3082	287
EL3H7-G	263	ELM3042	290	ELT3083	287
EL3H7H-G	263	ELM3043	290	ELW135	283
EL3H7L-G	263	ELM3044	290	ELW136	283
EL3H7U-G	263	ELM3052	290	ELW137	284
EL406A	293	ELM3053	290	ELW2601	284
EL425A	293	ELM3054	290	ELW2611	284
EL440A	293	ELM3062	290	ELW3120	296
EL4502	281	ELM3063	290	ELW3121	296
EL4503	281	ELM3064	290	ELW3150	296
EL4504	281	ELM3082	290	ELW3151	296
EL452-G	276	ELM3083	290	ELW4503	283
EL460A	293	ELM3084	290	ELW4506	284
EL5720	296	ELM440A	292	EV101U-G	268
EL5721	296	ELM452	278	EV16150A	294
EL5750	296	ELM453	278	EV357NU-G	265
EL5751	296	ELM453H	278	EV3H4U-G	263
EL5770	296	ELM456	278	EV3H7U-G	263
EL5771	296	ELM460A	292	EV6150A	293
EL603A5	293	ELM600	278	H11A1	272
EL606A	293	ELM601	278	H11A2	272
EL606A3	293	ELM611	278	H11A3	272
EL6150A	293	ELM611H	278	H11A4	272
EL625A	293	ELM61A	279	H11A5	272
EL640A	293	ELM680	279	H11AA1	271
EL660A	293	ELM684	279	H11AA2	271
EL6880	286	ELM81L	279	H11AA3	271
EL7840	299	ELM840A	292	H11AA4	271
EL814-G	270	ELQ3H4-G	264	H11B1	277

ALPHANUMERIC INDEX

INFRARED LED, SENSORS, COUPLERS, DIGITAL ISOLATOR

H11B2	277	IR16-213C/L510/TR8	210	IRM-36xxJ18	241
H11B3	277	IR17-21C/TR8	211	IRM-36xxJ19	241
H11L1	278	IR19-21C/TR8	210	IRM-36xxJ22	241
H11L2	278	IR19-315C/TR8	211	IRM-36xxJF	241
H11L3	278	IR204/H16/L10	208	IRM-36xxM13	241
HC-HIR282017C2/L913-060/08T	222	IR204/H60	208	IRM-77xxJ15	242
HC-HIR383815C1/L933-150/08T	221	IR204-A	208	IRM-77xxJ16	242
HC-HIR383815C1/L947-150/08T	221	IR204C/H16/L10	208	IRM-77xxJ18	242
HC-HIR383815C2/L949-150/08T	221	IR204C-A	208	IRM-H200JW2	243
HC-HIR383822C1/L933-120/08T	221	IR25-21C/TR8	214	IRM-H2xxJ14	243
HC-HIR383822C1/L933-8012/08T	222	IR26-21C/L110/TR8	214	IRM-H2xxJ15	243
HC-HIR383823C1/L933-050/06T	221	IR26-21C/L447/CT	214	IRM-H2xxJ16	243
HC-HIR383823C1/L933-080/08T	221	IR26-51C/L110/TR8	215	IRM-H3xxJ14	245
HC-HIR383823C1/L933-090/08T	221	IR26-51C/L510/TR8	215	IRM-H3xxJ15	245
HC-IR282017C2/L873-060/08T	222	IR26-61C/L510/R/2G	213	IRM-H3xxJ16	245
HC-IR383815C1/L743-150/08T	221	IR26-61C/L745/TR8	213	IRM-H5xxJ14	244
HC-IR383822C1/L743-120/08T	221	IR26-61C/L746/R/TR8	209	IRM-H5xxJ15	244
HC-IR383822C2/L741-120/08T	221	IR26-61C/L746/R/TR8	213	IRM-H5xxJ16	244
HC-IR383823C2/L741-090/08T	221	IR26-71C/L447/S63/TR8	212	IRM-H6xxJ14	245
HC-IR383823C2/L741-150/08T	221	IR26-91C/2D	212	IRM-H6xxJ15	245
HC-IR383827C2/L741-050/06T	221	IR26-91C/L510/2D	212	IRM-H6xxJ16	245
HC-IR383827C2/L941-050/06T	221	IR29-01C/L510/R/TR8	213	IRM-H6xxJ22	245
HC-IR383828C2/L741-060/06T	221	IR323	206	IRM-H6xxJF	245
HIR11-21C/L11/TR8	213	IR323/H0-A	206	IRM-H8xxJ14	246
HIR12-21C/TR8	212	IR333/H0	206	IRM-H8xxJ15	246
HIR15-21C/TR8	214	IR333/H0/L10	206	IRM-H8xxJ16	246
HIR16-213C/L423/TR8	210	IR333-A	206	IRM-H8xxJ18	246
HIR17-215C/L289/TR8	211	IR333C	206	IRM-H8xxM13	246
HIR17-21C/L289/TR8	211	IR333C/H0/L10	206	IRM-H9xxJ14	243
HIR19-21C/L11/TR8	210	IR333C/H2	206	IRM-H9xxJ15	243
HIR19-21C/L289/TR8	210	IR3494-30C/H80/L419	208	IRM-H9xxJ16	243
HIR19-315C/L825/TR8	211	IR383	207	IRM-HQxxJ16	247
HIR204C	208	IR42-21C/TR8	215	IRM-HQxxJ18	247
HIR204C/H0	208	IR533C	207	IRM-V11xxJ16	247
HIR234C	208	IR57-21C/L491/TR8	216	IRM-V11xxJ18	247
HIR25-21C/L289/2T	214	IR67-21C/TR8	216	IRM-V16xxJ15	247
HIR25-21C/L423/TR8	214	IR67-41C/L491/TR8	217	IRM-V16xxJ16	247
HIR26-21C/L289/TR8	214	IR7373C	206	IRM-V16xxJ18	247
HIR26-21C/L423/TR8	214	IR7393C	207	IRM-V5xxJ14	244
HIR26-51C/L423/TR8	215	IR83-01C/2H	210	IRM-V5xxJ15	244
HIR323C	206	IR8353-14C	207	IRM-V5xxJ16	244
HIR323C/H0	206	IR89-01C/L447/1R	216	IRM-V800JW2	246
HIR333/H0	206	IR908-7C-F	219	IRM-V8xxJ14	246
HIR333C/H0	206	IR91-01C/L491/2R	215	IRM-V8xxJ15	246
HIR333C/L212	207	IR91-21C	209	IRM-V8xxJ16	246
HIR42-21C/L289/TR8	215	IR91-21C/TR10	209	IRM-V8xxM13	246
HIR57-21C/TR8	216	IR91-21C/TR7	209	IRR15-22C/L491/TR8	218
HIR67-21C/L11/TR8	216	IR928-6C-F	219	IRR60-48C/L661/TR8	218
HIR67-31JC/L638/TR8	217	IR95-21C/L491/TR10	209	IRR60-48C/TR8	218
HIR7373C	206	IR95-21C/TR7	209	IRRG25-16C/L491/TR8	217
HIR7393C	207	IR95-21C/TR9	209	IR-S06-P120/L741-P03/TR	220
HIR83-01B/TR8	210	IR968-8C	219	ITR1204SR10A/TR	253
HIR89-01C-1R	216	IRM-35xxJ14	241	ITR1502SR40A/TR8	253
HIR-C19D-1N150/L649-P03/TR	220	IRM-35xxJ15	241	ITR1601CT50A/TB	249
HIR-C19D-1N40-L649-P03-TR-AM	220	IRM-35xxJ16	241	ITR20001/T	255
HIR-C19D-1N90/L649-P03/TR	220	IRM-35xxJ18	241	ITR20002	255
IR11-21C/L491/TR8	213	IRM-3600JW2	241	ITR2001SR10A/TR	253
IR11-21C/TR8	213	IRM-36xxJ14	241	ITR2006ST30A/TR	250
IR12-21C/TR8	212	IRM-36xxJ15	241	ITR20403	250
IR15-21C/TR8	214	IRM-36xxJ16	241	ITR2153DT20A/TB	249

INFRARED LED, SENSORS, COUPLERS, DIGITAL ISOLATOR

ITR2253DT40A/TB	251
ITR8102	250
ITR8104	251
ITR8307/F43	254
ITR8307/L24/F43	254
ITR8307/L24/TR8	254
ITR8307/S17/TR8	254
ITR8307/S18/TR8	254
ITR8402-F-A	252
ITR9606-F	251
ITR9707	252
ITR9909	255
PD12-21B/TR8	228
PD15-21C/TR8	228
PD15-22C/TR8	229
PD204-6B	224
PD204-6B/L3	224
PD204-6C	224
PD204-6C/L3	224
PD26-71B/S63/TR8	228
PD28-01B/L609/2C	230
PD333-3B/H0/L2	225
PD333-3B/L1	225
PD333-3B/L2	225
PD333-3B/L3	225
PD333-3B/L4	225
PD333-3C/H0/L2	225
PD333-3C/H0/L811	225
PD333-3C/L793	225
PD42-21C/TR8	229
PD438B	223
PD438B/S46	223
PD438C	223
PD438C/S46	223
PD44-37C-L753-TR8	226
PD638B	223
PD67-21B/TR8	230
PD70-01B/TR7	227
PD83-01B/L458/2H	227
PD91-21B/TR9	227
PD95-21B/TR10	226
PLR137	248
PLR237	248
PLT137	248
PLT237	248
PT11-21C/L41/TR8	237
PT12-21C/TR8	237
PT1504-6B	234
PT15-21B/TR8	238
PT17-21C/L41/TR8	236
PT19-21C/L41/TR8	236
PT19-315C/TR8	236
PT204-6B	232
PT204-6C	232
PT23-21B/TR8	238
PT2559B/L2/H2-F	231
PT2559B/L2-F	231
PT26-21C/TR8	238
PT26-51B/T/TR8	239
PT26-61B/TR8	237

PT26-71B/TR8	239
PT28-21B	235
PT333-3B	233
PT333-3C	232
PT334-6B	233
PT334-6C	233
PT42-21B/TR8	239
PT534-6B	234
PT57-21B/TR8	240
PT67-21C/L41/TR8	240
PT908-7B-F	231
PT908-7C-F	231
PT91-21B/L369/TR10	235
PT928-6B-F	231
PT928-6C-F	231
PT95-21C/TR7	235
SIR12-21C/TR8	212
SIR19-21C/TR8	210
SIR19-315/TR8	211
SIR204-A	208
SIR204C	208
SIR234	208
SIR323-5	206
SIR333-A	206
SIR383C	207
SIR57-21C/L294/TR8	216
SIR67-21C/TR8	216
SIR91-21C/TR10	209
SIR91-21C/TR7	209
SIR95-21C/TR10	209
TIL113	277

SEMI POWER

DFN 5x6-5L	311
DFN 8x8-5L	311
DFN 8x8-8L	311
TO-220-2L	306
TO-220-3L	306
TO-220F-2L	307
TO-220F-3L	307
TO-247-2L	310
TO-247-3L	310
TO-247-4L	310
TO-252-2L	308
TO-252-3L	308
TO-263-2L	309
TO-263-3L	309
TO-263-7L	309

CONDITIONS OF RoHS

From July 1st, 2006, RoHS requires that all electrical equipment should not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBBs) or poly brominated diphenyl ethers (PBDEs), and the elements are restricted to certain amount (such as mercury in a wound lighting tube <5 mg, lead in CRT glass, soldering tin, etc.). Before the date every member of European Union must obey of environment on chemical regulation.



- According to RoHS part, the norm of restrict and limit used substance adopted by EVERLIGHT.

Name	Description	Criteria
Cadmium	Cadmium and its compounds must not be present in parts, components, materials or products. Cadmium and its compounds must not used as stabilizers, coloring agent or as a surface coating treatment in parts, components, materials or products.	< 5 ppm (Plastics) < 75 ppm (Metals)
Lead restrictions	Lead and/or lead compounds shall not be present in hardware components or parts, however, except solder, electrical components and interconnect materials. Lead carbonates and sulfates must not be used in any paint applied to parts, component, or products.	< 100 ppm (Plastics) < 1000 ppm (Others)
Mercury restrictions	Mercury must not be contained in any part, material, components or product, including, but not limited to switches, relays or electrical contacts. This restriction does not apply to lamps with less than 10 mg if mercury.	< 5 ppm
Hexavalent chromium (chromium VI) and hexavalent chromium compounds	Hexavalent chromium (chromium VI) and hexavalent chromium compounds must not be present in parts, components, materials or products.	< 2 ppm
Polybrominated Biphenyls (PBBs)	Plastics parts, pomponents, materials and products must not contain Polybrominated Biphenyls as flame retardants, specific PBBs, but are not limited to those listed in attachment item.	< 5 ppm
Polybrominated Diphenyl Ethers (PBDEs)	Plastic parts, components, materials and products must not contain Polybrominated Biphenyl Ethers, known as flame retardants, specific PBBEs, including, but are not limited to, those listed in attachment item.	< 5 ppm

Compliant with the following condition :

- Please visit EVERLIGHT website for more updated information about third party test reports and RoHS declarations.
(www.everlight.com)

APPLICATION NOTICE

Since we are continuously improving all of our products, the information listed in this Catalogue, which includes specifications, characteristics, data, materials used, structure, etc., are subject to change without prior notice. It is necessary that you request the newest specification sheet from EVERLIGHT when you place any inquiry or purchase order.

Please carefully read the specification sheet, and confirm your acceptance of the content. EVERLIGHT does not accept any liabilities for damages occurred due to the customer's lack of confirming the newest product specification.

It is important to strictly follow the maximum limit and other important instructions listed on the specifications sheet when using EVERLIGHT's products. The following is a list of special notes for products used in specific applications. It is recommended that customers read the instructions carefully before installing the products. Again, EVERLIGHT does not accept any liabilities for any improper use of EVERLIGHT's product or failure to follow the instructions listed herein:

Special Instruction:

1. Products listed in this Catalogue are designed primarily for the application listed below:
A : Calculators
B : Measurement equipment
C : AV machines
D : QA machines
E : Operating machines
F : Consumer electronics
G : Telecommunications

While products meet the application listed above, additional attention is required when products are to be utilized in the instruments listed under Special Instruction Notes 2 and 3.

2. When high reliability and safety concerns are required, it is very important that the design be made to focus on safety and long term reliability. Special care should be given to assure that EVERLIGHT's products integrate and function properly with all other parts of the instrument. Instruments fall into these categories include:

- A : Instruments attached to transportation tools
(aircraft, train, automobile)
- B : Traffic signs
- C : Gas leaking detectors and gas shutters
- D : Fire detectors
- E : Other safety detectors

3. When extremely high reliability and safety concerns are required, it is necessary that you contact EVERLIGHT for additional information before use. Instruments fall into these categories include:

- A : Aerospace instruments
- B : Telecommunication tools (main line)
- C : Nuclear weapon controls
- D : Medical instruments

4. Should you have any additional questions, please contact EVERLIGHT for details.

本資料所記載之製品的規格、特性、**DATA**、使用原料、構造...等，有時為了改良製品，無法事前通知，而逕行與予變更。因此請務必使用最新的規格書，並請針對內容加以確認。若因未確認規格書，導致使用次製品之機器或其他應用產品發生瑕疵時，敝公司將不負此責任。

使用本資料所記載之製品時，請遵守規格書所記載之絕對最大定格，使用上之注意事項，以及下列之注意點，若因不遵守規格書所記載之絕對最大定格，使用上之注意事項，以及下述之注意點，而導致發生損害問題時，敝公司將不負此責任。

注意項目：

1. 本資料所記載之製品，原則是為了下述之用途而製造出來的產品
A: 電算機
B: OA機器
C: 通信機器
D: 計測機器
E: 工作機器
F: AV機器
G: 家電製品

若雖合乎上述用途，但是屬於下述2或3所記載之機器時，則需遵守個別產品之使用注意事項。

2. 若本資料所記載之製品用於下述講求高信賴性與安全性之用途時，因牽涉到機能與精度方面，為了維持這類機器的信賴性與安全性，請務必注重安全設計與長期性設計，並且需考慮整體機構間的關係，依機器整體之安全設計來使用。
A: 運送機器(飛機、火車、汽車)與控制安全性等相關之產品
B: 交通信號機
C: 瓦斯漏氣檢測關閉機
D: 防災裝置
E: 各種安全裝置

3. 若本資料所記載之製品用於下述講求高信賴性與安全性之用途時，因牽涉到機能與精度方面，請事先與敝公司聯絡。
A: 太空機器(航太儀器)
B: 通信機器(幹線)
C: 原子彈控制機器
D: 醫療機器

4. 涉及上述注意事項之任何一項時，如有疑問，請和敝公司業務人員聯絡。

TECHNICAL DATA

HIGH POWER LED (SHWO, SHWO(N))

CIE BINNING RANKS

Cool-White Bin Coordinates

5000K				
Bin	50K-1	50K-2	50K-3	50K-4
CIE X	0.346	0.338	0.337	0.345
	0.345	0.337	0.337	0.344
	0.353	0.345	0.344	0.352
	0.355	0.346	0.345	0.353
CIE Y	0.369	0.362	0.349	0.356
	0.356	0.349	0.337	0.343
	0.362	0.356	0.343	0.349
	0.376	0.369	0.356	0.362

5700K				
Bin	57K-1	57K-2	57K-3	57K-4
CIE X	0.329	0.321	0.321	0.329
	0.329	0.321	0.322	0.329
	0.337	0.329	0.329	0.337
	0.338	0.329	0.329	0.337
CIE Y	0.354	0.346	0.335	0.342
	0.342	0.335	0.324	0.331
	0.349	0.342	0.331	0.337
	0.362	0.354	0.342	0.349

6500K				
Bin	65K-1	65K-2	65K-3	65K-4
CIE X	0.312	0.303	0.305	0.313
	0.313	0.305	0.307	0.315
	0.321	0.313	0.315	0.322
	0.321	0.312	0.313	0.321
CIE Y	0.339	0.330	0.321	0.329
	0.329	0.321	0.311	0.319
	0.337	0.329	0.319	0.326
	0.348	0.339	0.329	0.337

Warm-White Bin Coordinates

2700K				
Bin	27K-1	27K-2	27K-3	27K-4
CIE X	0.469	0.456	0.447	0.459
	0.459	0.447	0.437	0.448
	0.470	0.459	0.448	0.459
	0.481	0.469	0.459	0.470
CIE Y	0.429	0.426	0.408	0.410
	0.410	0.408	0.389	0.392
	0.413	0.410	0.392	0.394
	0.432	0.429	0.410	0.413

3000K				
Bin	30K-1	30K-2	30K-3	30K-4
CIE X	0.443	0.430	0.422	0.435
	0.435	0.422	0.415	0.426
	0.447	0.435	0.426	0.437
	0.456	0.443	0.435	0.447
CIE Y	0.421	0.417	0.399	0.403
	0.403	0.399	0.381	0.385
	0.408	0.403	0.385	0.389
	0.426	0.421	0.403	0.408


3500K				
Bin	35K-1	35K-2	35K-3	35K-4
CIE X	0.415	0.400	0.394	0.408
	0.408	0.394	0.389	0.402
	0.422	0.408	0.402	0.415
	0.430	0.415	0.408	0.422
CIE Y	0.409	0.402	0.385	0.392
	0.392	0.385	0.369	0.375
	0.399	0.392	0.375	0.381
	0.417	0.409	0.392	0.399

Natural-White Bin Coordinates

4000K				
Bin	40K-1	40K-2	40K-3	40K-4
CIE X	0.387	0.374	0.370	0.383
	0.383	0.370	0.367	0.378
	0.395	0.383	0.378	0.390
	0.401	0.387	0.383	0.395
CIE Y	0.396	0.387	0.373	0.380
	0.380	0.373	0.358	0.365
	0.388	0.380	0.365	0.372
	0.404	0.396	0.380	0.388

4500K				
Bin	45K-1	45K-2	45K-3	45K-4
CIE X	0.364	0.355	0.353	0.362
	0.362	0.353	0.351	0.359
	0.370	0.362	0.359	0.367
	0.374	0.364	0.362	0.370
CIE Y	0.381	0.374	0.360	0.366
	0.366	0.360	0.347	0.352
	0.373	0.366	0.352	0.358
	0.387	0.381	0.366	0.373

White Color Bin Structure

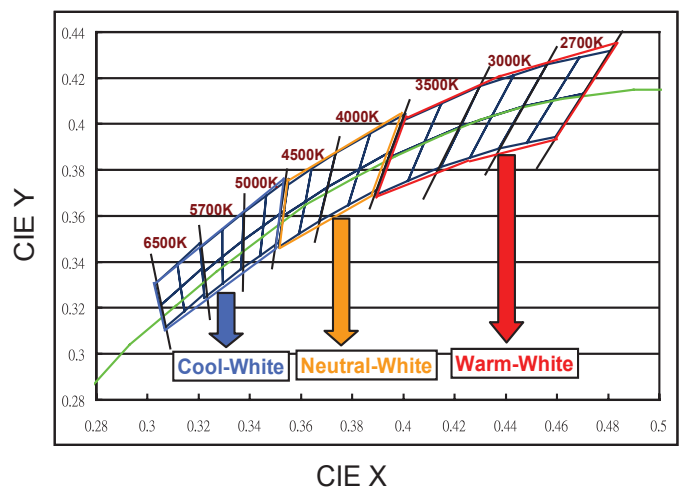

TECHNICAL DATA

HIGH POWER LED (SHWO ,SHWO(N))

BRIGHTNESS BINNING RANKS

Shwo
Brightness (lm)
Luminous Flux Bins

Group	Binning	Minimum Photometric Flux (lm)	Maximum Photometric Flux (lm)
E	1	4	5
	2	5	6
	3	6	8
	4	8	10
	5	10	13
	6	13	17
	7	17	20
	8	20	23
	9	23	27
F	1	27	33
	2	33	39
	3	39	45
	4	45	52
	5	52	60
	6	60	70
	7	70	80
	8	80	90
	9	90	100
J	1	100	110
	2	110	120
	3	120	130
	4	130	140
	5	140	150
	6	150	160
	7	160	180
	8	180	200
	9	200	225
K	1	225	250
	2	250	275
	3	275	300
	4	300	325
	5	325	350
	6	350	375
	7	375	400
	8	400	425
	9	425	450
N	1	450	475
	2	475	500
	3	500	525
	4	525	550

Shwo
Wavelength (nm)

Group	Binning	Minimum Dominant	Maximum Dominant
		Wavelength (nm)	Wavelength (nm)
B Blue/ Royal- Blue	1	430	435
	2	435	440
	3	440	445
	4	445	450
	5	450	455
	6	455	460
	7	460	465
	8	465	470
G Green	1	520	525
	2	525	530
	3	530	535
	4	535	540
	5	540	545
	6	545	550
A Amber	1	580	582.5
	2	582.5	585
	3	585	587.5
	4	587.5	590
	5	590	592.5
	6	592.5	595
R Red	3	610	615
	4	615	620
	5	620	625
	6	625	630
D Deep- Red	7	630	635
	1	635	640
	2	640	645
	3	645	650
	4	650	655
	5	655	660
	6	660	665
	7	665	670
F Far- Red	8	670	675
	1	700	710
	2	710	715
	3	715	720
	4	720	725
	5	725	730
	6	730	735
	7	735	740
	8	740	745

HIGH POWER LED (SHWO, SHWO(N))

FORWARD VOLTAGE BINNING RANKS

Shwo

Forward Voltage Bins

Group Name	Bins		
A	U1+U2+U3		
B	U2+U3+U4		
C	V1+V2+V3		
D	V2+V3+V4		
E	V3+V4+V5		
F	V1+V2		
G	V1		
Bin	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)	
U1	1.75	2.05	
U2	2.05	2.35	
U3	2.35	2.65	
U4	2.65	2.95	
V1	2.95	3.25	
V2	3.25	3.55	
V3	3.55	3.85	
V4	3.85	4.15	
V5	4.15	4.45	

TECHNICAL DATA

For Lighting Application Only

LOW MIDDLE POWER LED - SMD TYPE CIE BINNING RANKS

Cool-White Bin Coordinates

5000K						
Bin	A	B	C	D	F	G
CIE X	0.3551	0.3464	0.3371	0.3533	0.3487	0.3482
	0.3464	0.3376	0.3366	0.3482	0.3425	0.3422
	0.3456	0.3371	0.3441	0.3477	0.3422	0.3418
	0.3487	0.3422	0.3448	0.3448	0.3482	0.3477
	0.3482	0.3425	0.3418	0.3441	--	--
CIE Y	0.3533	0.3456	0.3422	0.3515	--	--
	0.3760	0.3688	0.3493	0.3624	0.3629	0.3583
	0.3688	0.3616	0.3369	0.3583	0.3579	0.3533
	0.3604	0.3493	0.3428	0.3530	0.3533	0.3483
	0.3629	0.3533	0.3507	0.3507	0.3583	0.3530
	0.3583	0.3579	0.3483	0.3428	--	--
	0.3624	0.3604	0.3533	0.3487	--	--
5700K						
Bin	A	B	C	D	F	G
CIE X	0.3376	0.3292	0.3215	0.3371	0.3321	0.3321
	0.3292	0.3207	0.3222	0.3321	0.3261	0.3262
	0.3292	0.3215	0.3294	0.3320	0.3262	0.3263
	0.3321	0.3262	0.3293	0.3293	0.3321	0.3320
	0.3321	0.3261	0.3263	0.3294	--	--
CIE Y	0.3371	0.3292	0.3262	0.3366	--	--
	0.3616	0.3539	0.3353	0.3493	0.3490	0.3447
	0.3539	0.3462	0.3243	0.3447	0.3436	0.3395
	0.3464	0.3353	0.3306	0.3401	0.3395	0.3350
	0.3490	0.3395	0.3377	0.3377	0.3447	0.3401
	0.3447	0.3436	0.3350	0.3306	--	--
	0.3493	0.3464	0.3395	0.3369	--	--
6500K						
Bin	A	B	C	D	F	G
CIE X	0.3205	0.3117	0.3048	0.3213	0.3157	0.3161
	0.3117	0.3028	0.3068	0.3161	0.3093	0.3100
	0.3125	0.3048	0.3145	0.3166	0.3100	0.3106
	0.3157	0.3100	0.3136	0.3136	0.3161	0.3166
	0.3161	0.3093	0.3106	0.3145	--	--
CIE Y	0.3213	0.3125	0.3100	0.3221	--	--
	0.3481	0.3393	0.3209	0.3371	0.3360	0.3320
	0.3393	0.3304	0.3113	0.3320	0.3297	0.3259
	0.3328	0.3209	0.3187	0.3281	0.3259	0.3222
	0.3360	0.3259	0.3251	0.3251	0.3320	0.3281
	0.3320	0.3297	0.3222	0.3187	--	--
	0.3371	0.3328	0.3259	0.3261	--	--


Natural-White Bin Coordinates

4000K						
Bin	A	B	C	D	F	G
CIE X	0.4006	0.3871	0.3703	0.3952	0.3890	0.3873
	0.3871	0.3736	0.3670	0.3873	0.3793	0.3779
	0.3843	0.3703	0.3784	0.3854	0.3779	0.3764
	0.3890	0.3779	0.3810	0.3810	0.3873	0.3854
	0.3873	0.3793	0.3764	0.3784	--	--
CIE Y	0.3952	0.3843	0.3779	0.3898	--	--
	0.4044	0.3959	0.3726	0.3880	0.3887	0.3831
	0.3959	0.3874	0.3578	0.3831	0.3828	0.3773
	0.3858	0.3726	0.3647	0.3768	0.3773	0.3713
	0.3887	0.3773	0.3741	0.3741	0.3831	0.3768
	0.3831	0.3828	0.3713	0.3647	--	--
	0.3880	0.3858	0.3773	0.3716	--	--
4500K						
Bin	A	B	C	D	F	G
CIE X	0.3736	0.3642	0.3530	0.3703	0.3658	0.3648
	0.3642	0.3548	0.3512	0.3648	0.3592	0.3584
	0.3626	0.3530	0.3591	0.3637	0.3584	0.3575
	0.3658	0.3584	0.3607	0.3607	0.3648	0.3637
	0.3648	0.3592	0.3575	0.3591	--	--
CIE Y	0.3703	0.3626	0.3584	0.3670	--	--
	0.3874	0.3805	0.3601	0.3726	0.3738	0.3686
	0.3805	0.3736	0.3465	0.3686	0.3689	0.3640
	0.3714	0.3601	0.3522	0.3630	0.3640	0.3585
	0.3738	0.3640	0.3608	0.3608	0.3686	0.3630
	0.3686	0.3689	0.3585	0.3522	--	--
	0.3726	0.3714	0.3640	0.3578	--	--

Warm-White Bin Coordinates

2700K						
Bin	A	B	C	D	F	G
CIE X	0.4813	0.4687	0.4465	0.4700	0.4667	0.4627
	0.4687	0.4562	0.4373	0.4627	0.4576	0.4539
	0.4621	0.4465	0.4483	0.4588	0.4539	0.4502
	0.4667	0.4539	0.4544	0.4544	0.4627	0.4588
	0.4627	0.4576	0.4502	0.4483	--	--
CIE Y	0.4700	0.4621	0.4539	0.4593	--	--
	0.4319	0.4289	0.4071	0.4126	0.4180	0.4109
	0.4289	0.4260	0.3893	0.4109	0.4158	0.4088
	0.4169	0.4071	0.3919	0.4041	0.4088	0.4020
	0.4180	0.4088	0.4030	0.4030	0.4109	0.4041
	0.4109	0.4158	0.4020	0.3919	--	--
	0.4126	0.4169	0.4088	0.3944	--	--
3000K						
Bin	A	B	C	D	F	G
CIE X	0.4562	0.4430	0.4221	0.4465	0.4422	0.4388
	0.4430	0.4299	0.4147	0.4388	0.4328	0.4297
	0.4375	0.4221	0.4259	0.4355	0.4297	0.4267
	0.4422	0.4297	0.4311	0.4311	0.4388	0.4355
	0.4388	0.4328	0.4267	0.4259	--	--
CIE Y	0.4465	0.4375	0.4297	0.4373	--	--
	0.4260	0.4212	0.3984	0.4071	0.4113	0.4043
	0.4212	0.4165	0.3814	0.4043	0.4079	0.4011
	0.4096	0.3984	0.3853	0.3977	0.4011	0.3946
	0.4113	0.4011	0.3962	0.3962	0.4043	0.3977
	0.4043	0.4079	0.3946	0.3853	--	--
	0.4071	0.4096	0.4011	0.3893	--	--
3500K						
Bin	A	B	C	D	F	G
CIE X	0.4299	0.4148	0.3943	0.4221	0.4159	0.4134
	0.4148	0.3996	0.3889	0.4134	0.4051	0.4029
	0.4106	0.3943	0.4018	0.4108	0.4029	0.4006
	0.4159	0.4029	0.4057	0.4057	0.4134	0.4108
	0.4134	0.4051	0.4006	0.4018	--	--
CIE Y	0.4221	0.4106	0.4029	0.4147	--	--
	0.4165	0.4090	0.3853	0.3984	0.4007	0.3943
	0.4090	0.4015	0.3690	0.3943	0.3954	0.3893
	0.3981	0.3853	0.3752	0.3878	0.3893	0.3829
	0.4007	0.3893	0.3853	0.3853	0.3943	0.3878
	0.3943	0.3954	0.3829	0.3752	--	--
	0.3984	0.3981	0.3893	0.3814	--	--

■ White Color Bin Structure

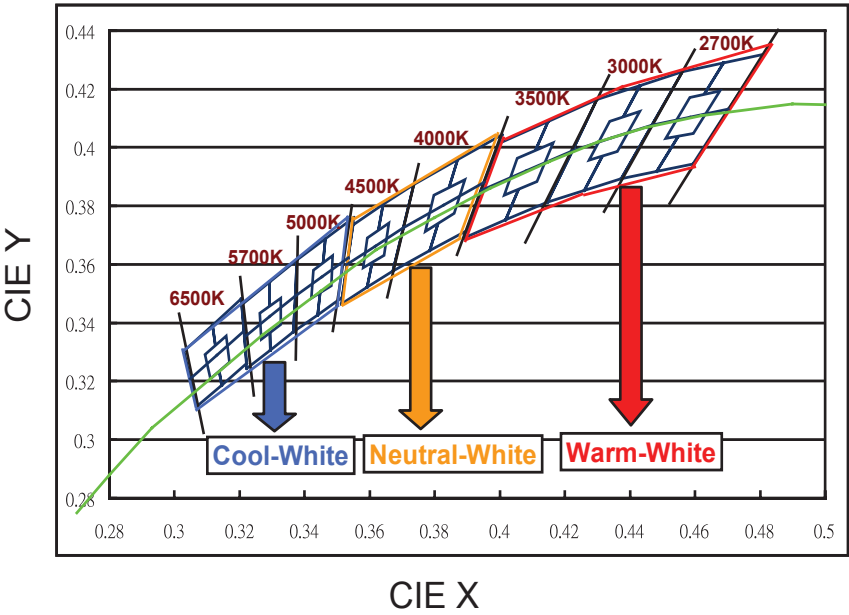

Chromaticity specification defined by ANSI

TECHNICAL DATA

For Lighting Application Only

LOW MIDDLE POWER LED - SURFACE MOUNT PLCC TYPE LED BRIGHTNESS BINNING RANKS

Luminous Flux Bins

Unit : lm

Bin code	Range	
	Min.	Max.
D1	0.5	1.0
D2	1.0	1.5
D3	1.5	2.0
D4	2.0	2.5
D5	2.5	3.0
D6	3.0	3.5
D7	3.5	4.0
D8	4.0	4.5
D9	4.5	5.0
BA	5.0	5.5
B1	5.5	6.0
B2	6.0	6.5
B3	6.5	7.0
B4	7.0	7.5
B5	7.5	8.0
B6	8.0	8.5
B7	8.5	9.0
B8	9.0	9.5
B9	9.5	10.0
L1	10.0	11.0
L2	11.0	12.0
L3	12.0	13.0
L4	13.0	14.0
L5	14.0	15.0
L6	15.0	16.0
L7	16.0	17.0
L8	17.0	18.0
L9	18.0	19.0
M3	19.0	21.0
M4	21.0	24.0
N3	24.0	27.0
N4	27.0	33.0
P3	33.0	39.0
P4	39.0	45.0
Q3	45.0	52.0
NB	32.0	36.0
PA	36.0	40.0
PB	40.0	45.0
QA	45.0	50.0
R1	50.0	55.0
R2	55.0	60.0
R3	60.0	65.0
R4	65.0	70.0
R5	70.0	76.0
R6	76.0	83.0
R7	83.0	90.0
R8	90.0	100.0
S1	100.0	110.0
S2	110.0	120.0
S3	120.0	130.0
S4	130.0	140.0
S5	140.0	150.0
S6	150.0	160.0
S7	160.0	170.0

VF Group Bin Code

Unit : V

Forward Voltage Group	Bin	Min.	Max.
B2	B42	35	2.80
		36	2.90
		37	3.00
		38	3.10
		39	3.20
		40	3.30
		41	3.40
	42	3.50	3.60

Forward Voltage Group	Bin	Min.	Max.
5670	5#6	5.6	5.7
	5#7	5.7	5.8
	5#8	5.8	5.9
	5#9	5.9	6.0
	6#0	6.0	6.1
	6#1	6.1	6.2
	6#2	6.2	6.3
	6#3	6.3	6.4
	6#4	6.4	6.5
	6#5	6.5	6.6
	6#6	6.6	6.7
	6#7	6.7	6.8
	6#8	6.8	6.9
	6#9	6.9	7.0

Forward Voltage Group	Bin	Min.	Max.
8499	84C	8.4	8.7
	87C	8.7	9.0
	90C	9.0	9.3
	93C	9.3	9.6
	96C	9.6	9.9

SMD LED : SURFACE MOUNT CHIP LED (PCB TYPE)
BRIGHTNESS BIN SELECTION

Luminous Intensity Groups

Unit : mcd

	C0: 0.28 ... 0.45	Q ▶	Q1: 72.0 ... 90.0
	D0: 0.45 ... 0.70		Q2: 90.0 ... 112
	E0: 0.70 ... 1.1	R ▶	R1: 112 ... 140
	F0: 1.1 ... 1.8		R2: 140 ... 180
	G0: 1.8 ... 2.8	S ▶	S1: 180 ... 225
	H0: 2.8 ... 4.5		S2: 225 ... 285
	J0: 4.5 ... 7.2	T ▶	T1: 285 ... 360
	K0: 7.2 ... 11.5		T2: 360 ... 450
L ▶	L1: 11.5 ... 14.5	U ▶	U1: 450 ... 565
	L2: 14.5 ... 18.0		U2: 565 ... 715
M ▶	M1: 18.0 ... 22.5		V0: 715 ... 1120
	M2: 22.5 ... 28.5		W0: 1120 ... 1800
N ▶	N1: 28.5 ... 36.0		X0: 1800 ... 2850
	N2: 36.0 ... 45.0		Y0: 2850 ... 4500
P ▶	P1: 45.0 ... 57.0		
	P2: 57.0 ... 72.0		

Note: The luminous intensity data did not include ±15% testing tolerance.

V_F (Forward Voltage Spec. Setup)

Unit : V


Forward Voltage Groups		Bin	Min.	Max.
		00	1.55	1.75
		0	1.75	1.95
		1	1.95	2.15
		2	2.15	2.35
		3	2.35	2.55
		4	2.55	2.75
		5	2.75	3.05
		6	3.05	3.35
		7	3.35	3.65
		8	3.65	3.95
		10	2.70	2.90
		11	2.90	3.10
		12	3.10	3.30
		13	3.30	3.50
		14	3.50	3.70
		15	2.70	2.85
		16	2.85	3.00
		17	3.00	3.15
		18	3.15	3.30

Note: The forward voltage data did not include ±0.1V testing tolerance.

Bin Coordinate

Group	Bin Code	CIE_X	CIE_Y
A	1	0.274	0.226
		0.274	0.258
		0.294	0.286
		0.294	0.254
	2	0.274	0.258
		0.274	0.291
		0.294	0.319
		0.294	0.286
	3	0.294	0.254
		0.294	0.286
		0.314	0.315
		0.314	0.282
	4	0.294	0.286
		0.294	0.319
		0.314	0.347
		0.314	0.315
	5	0.314	0.282
		0.314	0.315
		0.334	0.343
		0.334	0.311
	6	0.314	0.315
		0.314	0.347
		0.334	0.376
		0.334	0.343

Bin Structure (White Light)

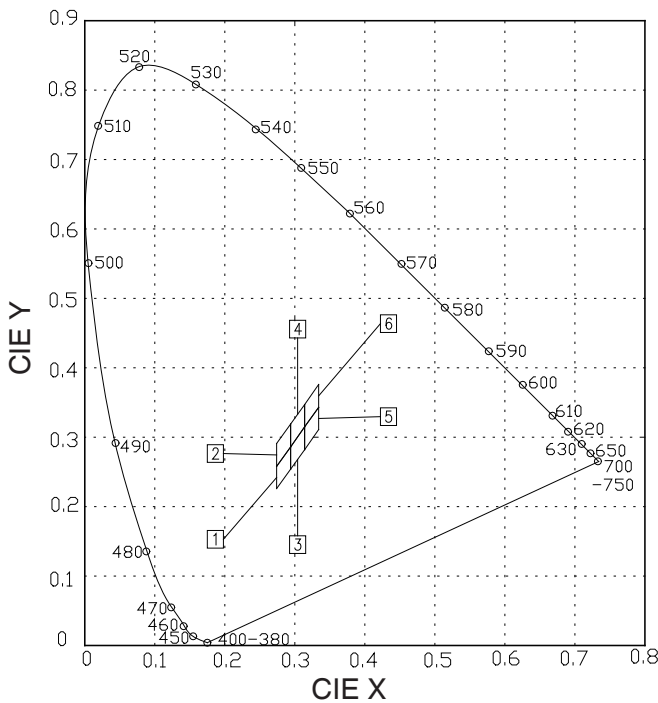

TECHNICAL DATA

For Lighting Application Only

SMD LED : SURFACE MOUNT PLCC LED (REFLECTOR) / LOW POWER LED
BRIGHTNESS BIN SELECTION

Luminous Intensity Groups

Unit : mcd

Bin Code	Min.	Max.	Bin Code	Min.	Max.
D1	0.5	1.0	NB	32.0	36.0
D2	1.0	1.5	PA	36.0	40.0
D3	1.5	2.0	PB	40.0	45.0
D4	2.0	2.5	QA	45.0	50.0
D5	2.5	3.0	R1	50.0	55.0
D6	3.0	3.5	R2	55.0	60.0
D7	3.5	4.0	R3	60.0	65.0
D8	4.0	4.5	R4	65.0	70.0
D9	4.5	5.0	R5	70.0	76.0
BA	5.0	5.5	R6	76.0	83.0
B1	5.5	6.0	R7	83.0	90.0
B2	6.0	6.5	R8	90.0	100.0
B3	6.5	7.0	S1	100.0	110.0
B4	7.0	7.5	S2	110.0	120.0
B5	7.5	8.0	S3	120.0	130.0
B6	8.0	8.5	S4	130.0	140.0
B7	8.5	9.0	S5	140.0	150.0
B8	9.0	9.5	S6	150.0	160.0
B9	9.5	10.0	S7	160.0	170.0
L1	10.0	11.0	S8	170.0	180.0
L2	11.0	12.0	T1	180.0	190.0
L3	12.0	13.0	T2	190.0	200.0
L4	13.0	14.0	T3	200.0	220.0
L5	14.0	15.0	T4	220.0	240.0
L6	15.0	16.0	T5	240.0	260.0
L7	16.0	17.0	T6	260.0	280.0
L8	17.0	18.0	T7	280.0	300.0
L9	18.0	19.0	T8	300.0	320.0
M3	19.0	21.0			
M4	21.0	24.0			
N3	24.0	27.0			
N4	27.0	33.0			
P3	33.0	39.0			
P4	39.0	45.0			
Q3	45.0	52.0			

V_F (Forward Voltage Spec. Setup)


Unit : V (I_F=150mA)

Bin Group	Bin Code	Min.	Max.
B42	B2	35	2.8
		36	2.9
		37	3.0
		38	3.1
		39	3.2
		40	3.3
		41	3.4
		42	3.5

Table of Color Rendering Index

Symbol	Description
M	CRI(Min.) : 60
N	CRI(Min.) : 65
L	CRI(Min.) : 70
Q	CRI(Min.) : 75
K	CRI(Min.) : 80
P	CRI(Min.) : 85
H	CRI(Min.) : 90

Bin Structure

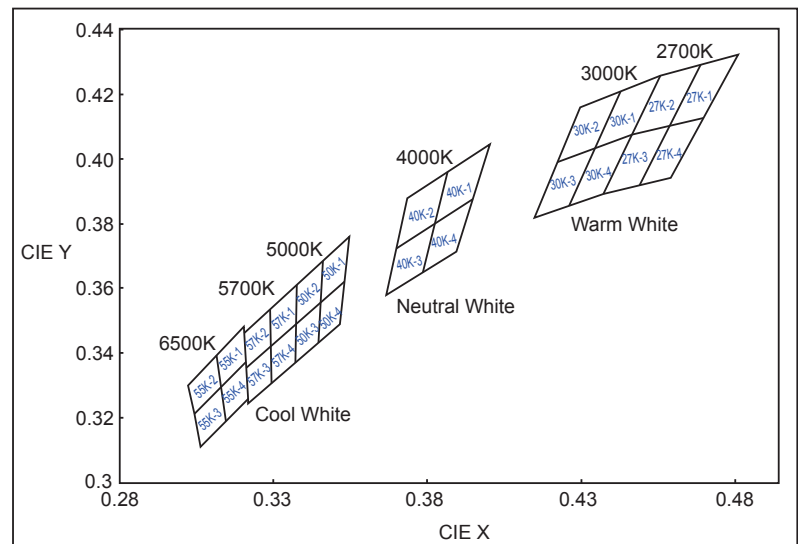


Bin Coordinate

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
6500K	65K-1	0.3205	0.3481	65K-3	0.3131	0.3290
		0.3117	0.3393		0.3048	0.3209
		0.3131	0.3290		0.3068	0.3113
		0.3213	0.3371		0.3145	0.3187
	65K-2	0.3117	0.3393	65K-4	0.3213	0.3371
		0.3028	0.3304		0.3131	0.3290
		0.3048	0.3209		0.3145	0.3187
		0.3131	0.3290		0.3221	0.3261
5700K	57K-1	0.3376	0.3616	57K-3	0.3293	0.3423
		0.3292	0.3539		0.3215	0.3353
		0.3293	0.3423		0.3222	0.3243
		0.3371	0.3493		0.3294	0.3306
	57K-2	0.3292	0.3539	57K-4	0.3371	0.3493
		0.3207	0.3462		0.3293	0.3423
		0.3215	0.3353		0.3294	0.3306
		0.3293	0.3423		0.3366	0.3369
5000K	50K-1	0.3551	0.3760	50K-3	0.3452	0.3558
		0.3464	0.3688		0.3371	0.3493
		0.3452	0.3558		0.3366	0.3369
		0.3533	0.3624		0.3441	0.3428
	50K-2	0.3464	0.3688	50K-4	0.3533	0.3624
		0.3376	0.3616		0.3452	0.3558
		0.3371	0.3493		0.3441	0.3428
		0.3452	0.3558		0.3515	0.3487
4000K	40K-1	0.4006	0.4044	40K-3	0.3828	0.3803
		0.3871	0.3959		0.3703	0.3726
		0.3828	0.3803		0.3670	0.3578
		0.3952	0.3880		0.3784	0.3647
	40K-2	0.3871	0.3959	40K-4	0.3952	0.3880
		0.3736	0.3874		0.3828	0.3803
		0.3703	0.3726		0.3784	0.3647
		0.3828	0.3803		0.3898	0.3716
3000K	30K-1	0.4562	0.4260	30K-3	0.4345	0.4033
		0.4431	0.4213		0.4223	0.3990
		0.4345	0.4033		0.4147	0.3814
		0.4468	0.4077		0.4260	0.3854
	30K-2	0.4431	0.4213	30K-4	0.4468	0.4077
		0.4299	0.4165		0.4345	0.4033
		0.4223	0.3990		0.4260	0.3854
		0.4345	0.4033		0.4373	0.3893
2700K	27K-1	0.4813	0.4319	27K-3	0.4585	0.4104
		0.4688	0.4290		0.4468	0.4077
		0.4585	0.4104		0.4373	0.3893
		0.4703	0.4132		0.4483	0.3919
	27K-2	0.4688	0.4290	27K-4	0.4703	0.4132
		0.4562	0.4260		0.4585	0.4104
		0.4468	0.4077		0.4483	0.3919
			0.4104			0.3944

TECHNICAL DATA

SMD LED (99 SERIES) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

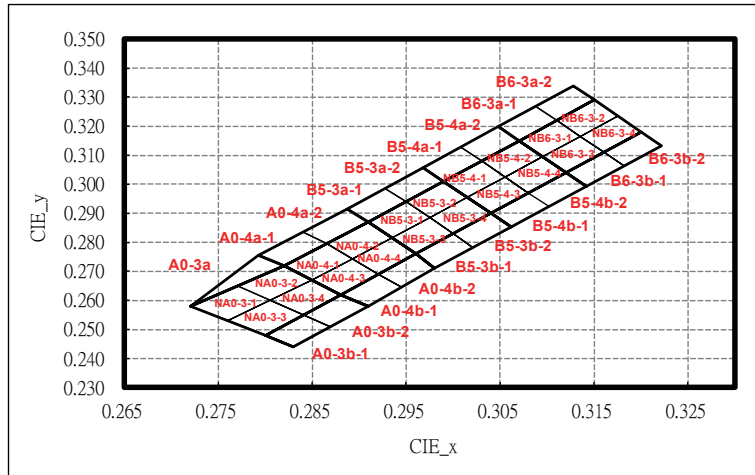

Bin Code of Chromaticity Coordinates

Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
NA0-3-1	0.2760	0.2530	NA0-3-2	0.2805	0.2600	NA0-4-1	0.2850	0.2670	NA0-4-2	0.2893	0.2743
	0.2720	0.2580		0.2770	0.2650		0.2820	0.2720		0.2865	0.2795
	0.2770	0.2650		0.2820	0.2720		0.2865	0.2795		0.2910	0.2870
	0.2805	0.2600		0.2850	0.2670		0.2893	0.2743		0.2935	0.2815
NA0-3-3	0.2800	0.2480	NA0-3-4	0.2840	0.2550	NA0-4-3	0.2880	0.2620	NA0-4-4	0.2920	0.2690
	0.2760	0.2530		0.2805	0.2600		0.2850	0.2670		0.2893	0.2743
	0.2805	0.2600		0.2850	0.2670		0.2893	0.2743		0.2935	0.2815
	0.2840	0.2550		0.2880	0.2620		0.2920	0.2690		0.2960	0.2760
A0-3b-1	0.2830	0.2440	A0-3b-2	0.2870	0.2510	A0-4b-1	0.2910	0.2580	A0-4b-2	0.2945	0.2645
	0.2800	0.2480		0.2840	0.2550		0.2880	0.2620		0.2920	0.2690
	0.2840	0.2550		0.2880	0.2620		0.2920	0.2690		0.2960	0.2760
	0.2870	0.2510		0.2910	0.2580		0.2945	0.2645		0.2980	0.2710
A0-4a-1	0.2820	0.2720	A0-4a-2	0.2865	0.2795	B5-3a-1	0.2910	0.2870	B5-3a-2	0.2950	0.2940
	0.2793	0.2755		0.2840	0.2836		0.2887	0.2916		0.2928	0.2987
	0.2840	0.2836		0.2887	0.2916		0.2928	0.2987		0.2968	0.3058
	0.2865	0.2795		0.2910	0.2870		0.2950	0.2940		0.2990	0.3010
A0-3a	0.2720	0.2580	NB5-3-1	0.2935	0.2815	NB5-3-2	0.2910	0.2870	NB5-3-3	0.2975	0.2885
	0.2793	0.2755		0.2910	0.2870		0.2950	0.2940		0.3015	0.2955
	0.2820	0.2720		0.2975	0.2885		0.3062	0.2853		0.3102	0.2923
	0.2720	0.2580		0.3000	0.2830		0.3040	0.2900		0.3080	0.2970
NB5-3-3	0.2960	0.2760	NB5-3-4	0.2975	0.2885	B5-4b-1	0.3080	0.2970	B5-4b-2	0.3120	0.3040
	0.2935	0.2815		0.3015	0.2955		0.3102	0.2923		0.3142	0.2993
	0.2975	0.2885		0.3040	0.2900		0.3070	0.3150		0.3110	0.3220
	0.3000	0.2830		0.3062	0.2853		0.3048	0.3198		0.3088	0.3268
B5-3b-1	0.2980	0.2710	B5-3b-2	0.3000	0.2830	B6-3a-1	0.3110	0.3220	B6-3a-2	0.3150	0.3290
	0.2960	0.2760		0.3040	0.2900		0.3095	0.3095		0.3135	0.3165
	0.3000	0.2830		0.3080	0.3080		0.3070	0.3150		0.3110	0.3220
	0.3021	0.2782		0.3048	0.3198		0.3110	0.3220		0.3150	0.3290
B5-4a-1	0.2990	0.3010	B5-4a-2	0.3070	0.3150	NB6-3-1	0.3135	0.3165	NB6-3-2	0.3175	0.3235
	0.2968	0.3058		0.3055	0.3025		0.3120	0.3040		0.3160	0.3110
	0.3008	0.3128		0.3030	0.3080		0.3095	0.3095		0.3135	0.3165
	0.3030	0.3080		0.3070	0.3150		0.3135	0.3165		0.3175	0.3235
NB5-4-1	0.3015	0.2955	NB5-4-2	0.3055	0.3025	NB6-3-3	0.3160	0.3110	NB6-3-4	0.3200	0.3180
	0.2990	0.3010		0.3030	0.3080		0.3142	0.2993		0.3182	0.3063
	0.3030	0.3080		0.3070	0.3150		0.3120	0.3040		0.3160	0.3110
	0.3055	0.3025		0.3095	0.3095		0.3160	0.3110		0.3200	0.3180
NB5-4-3	0.3040	0.2900	NB5-4-4	0.3080	0.2970	B6-3b-1	0.3182	0.3063	B6-3b-2	0.3222	0.3133
	0.3015	0.2955		0.3055	0.3025		0.3160	0.3110			
	0.3055	0.3025		0.3095	0.3095						
	0.3080	0.2970		0.3120	0.3040						

V_F (Forward Voltage Spec. Setup)

Unit : V

Bin	Unit: V	
	Min.	Max.
D26	2.60	2.70
D27	2.70	2.80
D28	2.80	2.90
D29	2.90	3.00
D30	3.00	3.10
D31	3.10	3.20
D32	3.20	3.30
D33	3.30	3.40
D34	3.40	3.50

Note: Tolerance of Forward Voltage: $\pm 0.05V$

Luminous Flux


Bin	Unit: lm		Unit: mcd.	
	Min	Max	Min	Max
B45	4.50	4.75	1605	1695
B47	4.75	5.00	1695	1785
B50	5.00	5.25	1785	1875
B52	5.25	5.50	1875	1965
B55	5.50	5.75	1965	2055
B57	5.75	6.00	2055	2145
B60	6.00	6.25	2145	2235
B62	6.25	6.50	2235	2325
B65	6.50	6.75	2325	2415
B67	6.75	7.00	2415	2505
B70	7.00	7.25	2505	2595
B72	7.25	7.50	2595	2685
B75	7.50	7.75	2685	2775
B77	7.75	8.00	2775	2865
B80	8.00	8.25	2865	2955
B82	8.25	8.50	2955	3045
B85	8.50	8.75	3045	3135
B87	8.75	9.00	3135	3225
B90	9.00	9.25	3225	3315
B92	9.25	9.50	3315	3405
B95	9.50	9.75	3405	3495
B97	9.75	10.00	3495	3585

Note: Tolerance of Luminous Flux: $\pm 7\%$.

TECHNICAL DATA

SMD LED (3003,3006 SERIES) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

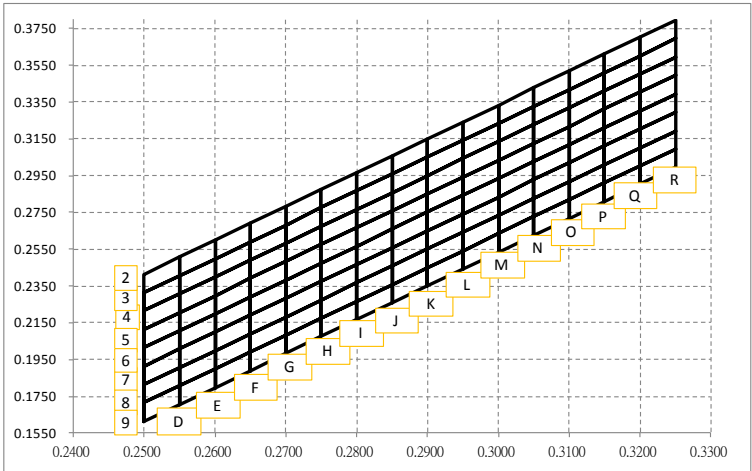

Bin code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
D2	0.2500	0.2314	E2	0.2550	0.2406	F2	0.2600	0.2498	G2	0.2650	0.2590	H2	0.2700	0.2682
	0.2500	0.2414		0.2550	0.2506		0.2600	0.2598		0.2650	0.2690		0.2700	0.2782
	0.2550	0.2506		0.2600	0.2598		0.2650	0.2690		0.2700	0.2782		0.2750	0.2874
	0.2550	0.2406		0.2600	0.2498		0.2650	0.2590		0.2700	0.2682		0.2750	0.2774
D3	0.2500	0.2314	E3	0.2550	0.2406	F3	0.2600	0.2498	G3	0.2650	0.2590	H3	0.2700	0.2682
	0.2500	0.2214		0.2550	0.2306		0.2600	0.2398		0.2650	0.2490		0.2700	0.2582
	0.2550	0.2406		0.2600	0.2498		0.2650	0.2590		0.2700	0.2682		0.2750	0.2774
	0.2550	0.2306		0.2600	0.2398		0.2650	0.2490		0.2700	0.2582		0.2750	0.2674
D4	0.2500	0.2214	E4	0.2550	0.2306	F4	0.2600	0.2398	G4	0.2650	0.2490	H4	0.2700	0.2582
	0.2500	0.2114		0.2550	0.2206		0.2600	0.2298		0.2650	0.2390		0.2700	0.2482
	0.2550	0.2306		0.2600	0.2398		0.2650	0.2490		0.2700	0.2582		0.2750	0.2674
	0.2550	0.2206		0.2600	0.2298		0.2650	0.2390		0.2700	0.2482		0.2750	0.2574
D5	0.2500	0.2114	E5	0.2550	0.2206	F5	0.2600	0.2298	G5	0.2650	0.2390	H5	0.2700	0.2482
	0.2500	0.2014		0.2550	0.2106		0.2600	0.2198		0.2650	0.2290		0.2700	0.2382
	0.2550	0.2206		0.2600	0.2298		0.2650	0.2390		0.2700	0.2482		0.2750	0.2574
	0.2550	0.2106		0.2600	0.2198		0.2650	0.2290		0.2700	0.2382		0.2750	0.2474
D6	0.2500	0.2014	E6	0.2550	0.2106	F6	0.2600	0.2198	G6	0.2650	0.2290	H6	0.2700	0.2382
	0.2500	0.1914		0.2550	0.2006		0.2600	0.2098		0.2650	0.2190		0.2700	0.2282
	0.2550	0.2106		0.2600	0.2198		0.2650	0.2290		0.2700	0.2382		0.2750	0.2474
	0.2550	0.2006		0.2600	0.2098		0.2650	0.2190		0.2700	0.2282		0.2750	0.2374
D7	0.2500	0.1814	E7	0.2550	0.2006	F7	0.2600	0.2098	G7	0.2650	0.2190	H7	0.2700	0.2282
	0.2500	0.1714		0.2550	0.1906		0.2600	0.1998		0.2650	0.2090		0.2700	0.2182
	0.2550	0.2006		0.2600	0.2098		0.2650	0.2190		0.2700	0.2282		0.2750	0.2374
	0.2550	0.1906		0.2600	0.1998		0.2650	0.2090		0.2700	0.2182		0.2750	0.2274
D8	0.2500	0.1614	E8	0.2550	0.1806	F8	0.2600	0.1898	G8	0.2650	0.1990	H8	0.2700	0.2082
	0.2500	0.1514		0.2550	0.1706		0.2600	0.1798		0.2650	0.1890		0.2700	0.1982
	0.2550	0.1806		0.2600	0.1998		0.2650	0.2090		0.2700	0.2182		0.2750	0.2274
	0.2550	0.1706		0.2600	0.1898		0.2650	0.1890		0.2700	0.2082		0.2750	0.2174
D9	0.2500	0.1414	E9	0.2550	0.1606	F9	0.2600	0.1698	G9	0.2650	0.1790	H9	0.2700	0.2082
	0.2500	0.1314		0.2550	0.1506		0.2600	0.1598		0.2650	0.1690		0.2700	0.1982
	0.2550	0.1606		0.2600	0.1798		0.2650	0.1890		0.2700	0.2082		0.2750	0.2174
	0.2550	0.1506		0.2600	0.1698		0.2650	0.1790		0.2700	0.1982		0.2750	0.2074


Bin code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
I2	0.2750	0.2774	J2	0.2800	0.2866	K2	0.2850	0.2958	L2	0.2900	0.3050	M2	0.2950	0.3142
	0.2750	0.2874		0.2800	0.2966		0.2850	0.3058		0.2900	0.3150		0.2950	0.3242
	0.2800	0.2966		0.2850	0.3058		0.2900	0.3150		0.2950	0.3242		0.3000	0.3334
	0.2800	0.2866		0.2850	0.2958		0.2900	0.3050		0.2950	0.3142		0.3000	0.3234
I3	0.2750	0.2774	J3	0.2800	0.2866	K3	0.2850	0.2958	L3	0.2900	0.3050	M3	0.2950	0.3142
	0.2750	0.2674		0.2800	0.2766		0.2850	0.2858		0.2900	0.2950		0.2950	0.3042
	0.2800	0.2866		0.2850	0.2958		0.2900	0.3050		0.2950	0.3142		0.3000	0.3234
	0.2800	0.2766		0.2850	0.2858		0.2900	0.2950		0.2950	0.3042		0.3000	0.3134
I4	0.2750	0.2674	J4	0.2800	0.2766	K4	0.2850	0.2858	L4	0.2900	0.2950	M4	0.2950	0.3042
	0.2750	0.2574		0.2800	0.2666		0.2850	0.2758		0.2900	0.2850		0.2950	0.2942
	0.2800	0.2766		0.2850	0.2858		0.2900	0.2950		0.2950	0.3042		0.3000	0.3134
	0.2800	0.2666		0.2850	0.2758		0.2900	0.2850		0.2950	0.2942		0.3000	0.3034
I5	0.2750	0.2574	J5	0.2800	0.2666	K5	0.2850	0.2758	L5	0.2900	0.2850	M5	0.2950	0.2942
	0.2750	0.2474		0.2800	0.2566		0.2850	0.2658		0.2900	0.2750		0.2950	0.2842
	0.2800	0.2666		0.2850	0.2758		0.2900	0.2850		0.2950	0.2942		0.3000	0.3034
	0.2800	0.2566		0.2850	0.2658		0.2900	0.2750		0.2950	0.2842		0.3000	0.2934
I6	0.2750	0.2474	J6	0.2800	0.2566	K6	0.2850	0.2658	L6	0.2900	0.2750	M6	0.2950	0.2842
	0.2750	0.2374		0.2800	0.2466		0.2850	0.2558		0.2900	0.2650		0.2950	0.2742
	0.2800	0.2566		0.2850	0.2658		0.2900	0.2750		0.2950	0.2842		0.3000	0.2934
	0.2800	0.2466		0.2850	0.2558		0.2900	0.2650		0.2950	0.2742		0.3000	0.2834
I7	0.2750	0.2374	J7	0.2800	0.2466	K7	0.2850	0.2558	L7	0.2900	0.2650	M7	0.2950	0.2742
	0.2750	0.2274		0.2800	0.2366		0.2850	0.2458		0.2900	0.2550		0.2950	0.2642
	0.2800	0.2466		0.2850	0.2558		0.2900	0.2650		0.2950	0.2742		0.3000	0.2834
	0.2800	0.2366		0.2850	0.2458		0.2900	0.2550		0.2950	0.2642		0.3000	0.2734
I8	0.2750	0.2274	J8	0.2800	0.2366	K8	0.2850	0.2458	L8	0.2900	0.2550	M8	0.2950	0.2642
	0.2750	0.2174		0.2800	0.2266		0.2850	0.2358		0.2900	0.2450		0.2950	0.2542
	0.2800	0.2466		0.2850	0.2558		0.2900	0.2650		0.2950	0.2742		0.3000	0.2834
	0.2800	0.2366		0.2850	0.2458		0.2900	0.2550		0.2950	0.2642		0.3000	0.2734
I9	0.2750	0.2074	J9	0.2800	0.2166	K9	0.2850	0.2258	L9	0.2900	0.2350	M9	0.2950	0.2442
	0.2750	0.2074		0.2800	0.2166		0.2850	0.2258		0.2900	0.2350		0.2950	0.2442
	0.2800	0.2266		0.2850	0.2358		0.2900	0.2450		0.2950	0.2542		0.3000	0.2634
	0.2800	0.2166		0.2850	0.2258		0.2900	0.2350		0.2950	0.2442		0.3000	0.2534
	0.2750	0.2074		0.2800	0.2166		0.2850	0.2258		0.2900	0.2350		0.2950	0.2442

TECHNICAL DATA

SMD LED (3003,3006 SERIES) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

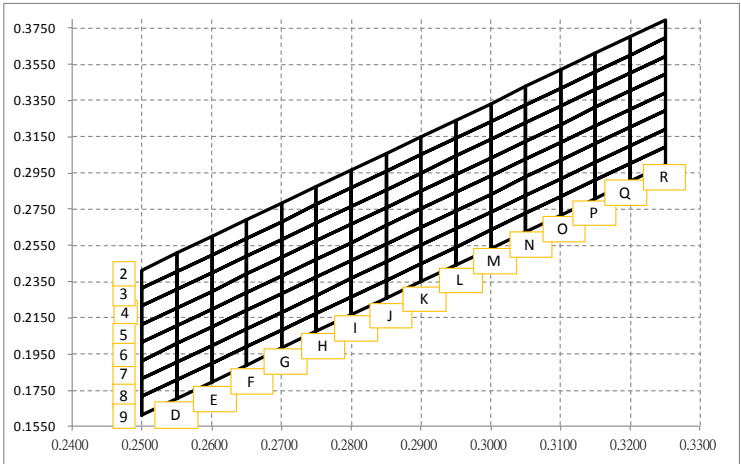

Bin code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
N2	0.3000	0.3234	O2	0.3050	0.3326	P2	0.3100	0.3418	Q2	0.3150	0.3510	R2	0.3200	0.3602
	0.3000	0.3334		0.3050	0.3426		0.3100	0.3518		0.3150	0.3610		0.3200	0.3702
	0.3050	0.3426		0.3100	0.3518		0.3150	0.3610		0.3200	0.3702		0.3250	0.3794
	0.3050	0.3326		0.3100	0.3418		0.3150	0.3510		0.3200	0.3602		0.3250	0.3694
N3	0.3000	0.3234	O3	0.3050	0.3326	P3	0.3100	0.3418	Q3	0.3150	0.3510	R3	0.3200	0.3602
	0.3000	0.3134		0.3050	0.3226		0.3100	0.3318		0.3150	0.3410		0.3200	0.3502
	0.3050	0.3326		0.3100	0.3418		0.3150	0.3510		0.3200	0.3602		0.3250	0.3694
	0.3050	0.3226		0.3100	0.3318		0.3150	0.3410		0.3200	0.3502		0.3250	0.3594
N4	0.3000	0.3134	O4	0.3050	0.3226	P4	0.3100	0.3318	Q4	0.3150	0.3410	R4	0.3200	0.3502
	0.3000	0.3034		0.3050	0.3126		0.3100	0.3218		0.3150	0.3310		0.3200	0.3402
	0.3050	0.3226		0.3100	0.3318		0.3150	0.3410		0.3200	0.3502		0.3250	0.3594
	0.3050	0.3126		0.3100	0.3218		0.3150	0.3310		0.3200	0.3402		0.3250	0.3494
N5	0.3000	0.3034	O5	0.3050	0.3126	P5	0.3100	0.3218	Q5	0.3150	0.3310	R5	0.3200	0.3402
	0.3000	0.2934		0.3050	0.3026		0.3100	0.3118		0.3150	0.3210		0.3200	0.3302
	0.3050	0.3126		0.3100	0.3218		0.3150	0.3310		0.3200	0.3402		0.3250	0.3494
	0.3050	0.3026		0.3100	0.3118		0.3150	0.3210		0.3200	0.3302		0.3250	0.3394
N6	0.3000	0.2934	O6	0.3050	0.3026	P6	0.3100	0.3118	Q6	0.3150	0.3210	R6	0.3200	0.3302
	0.3000	0.2834		0.3050	0.2926		0.3100	0.3018		0.3150	0.3110		0.3200	0.3202
	0.3050	0.3026		0.3100	0.3118		0.3150	0.3210		0.3200	0.3302		0.3250	0.3394
	0.3050	0.2926		0.3100	0.3018		0.3150	0.3110		0.3200	0.3202		0.3250	0.3294
N7	0.3000	0.2834	O7	0.3050	0.2926	P7	0.3100	0.3018	Q7	0.3150	0.3110	R7	0.3200	0.3202
	0.3000	0.2734		0.3050	0.2826		0.3100	0.2918		0.3150	0.3010		0.3200	0.3102
	0.3050	0.2926		0.3100	0.3018		0.3150	0.3110		0.3200	0.3202		0.3250	0.3294
	0.3050	0.2826		0.3100	0.2918		0.3150	0.3010		0.3200	0.3102		0.3250	0.3194
N8	0.3000	0.2734	O8	0.3050	0.2826	P8	0.3100	0.2918	Q8	0.3150	0.3010	R8	0.3200	0.3102
	0.3000	0.2634		0.3050	0.2726		0.3100	0.2818		0.3150	0.2910		0.3200	0.3002
	0.3050	0.2826		0.3100	0.2918		0.3150	0.3010		0.3200	0.3102		0.3250	0.3194
	0.3050	0.2726		0.3100	0.2818		0.3150	0.2910		0.3200	0.3002		0.3250	0.3094
N9	0.3000	0.2634	O9	0.3050	0.2726	P9	0.3100	0.2818	Q9	0.3150	0.2910	R9	0.3200	0.3002
	0.3000	0.2534		0.3050	0.2626		0.3100	0.2718		0.3150	0.2810		0.3200	0.2902
	0.3050	0.2726		0.3100	0.2818		0.3150	0.2910		0.3200	0.3002		0.3250	0.3094
	0.3050	0.2626		0.3100	0.2718		0.3150	0.2810		0.3200	0.2902		0.3250	0.2994
	0.3000	0.2534		0.3050	0.2626		0.3100	0.2718		0.3150	0.2810		0.3200	0.2902

Luminous Flux

Bin	Unit: lm		Unit: mcd	
	Min.	Max.	Min.	Max.
B45	4.50	4.75	1605	1695
B47	4.75	5.00	1695	1785
B50	5.00	5.25	1785	1875
B52	5.25	5.50	1875	1965
B55	5.50	5.75	1965	2055
B57	5.75	6.00	2055	2145
B60	6.00	6.25	2145	2235
B62	6.25	6.50	2235	2325
B65	6.50	6.75	2325	2415
B67	6.75	7.00	2415	2505
B70	7.00	7.25	2505	2595
B72	7.25	7.50	2595	2685
B75	7.50	7.75	2685	2775
B77	7.75	8.00	2775	2865
B80	8.00	8.25	2865	2955
B82	8.25	8.50	2955	3045
B85	8.50	8.75	3045	3135
B87	8.75	9.00	3135	3225
B90	9.00	9.25	3225	3315
B92	9.25	9.50	3315	3405
B95	9.50	9.75	3405	3495
B97	9.75	10.00	3495	3585

Note: Tolerance of Luminous Flux: $\pm 7\%$

V_F (Forward Voltage Spec. Setup)


Bin	Unit: V	
	Min.	Max.
D26	2.60	2.70
D27	2.70	2.80
D28	2.80	2.90
D29	2.90	3.00
D30	3.00	3.10
D31	3.10	3.20
D32	3.20	3.30
D33	3.30	3.40
D34	3.40	3.50

Note: Tolerance of Forward Voltage: $\pm 0.05V$.

TECHNICAL DATA

SMD LED (2604/3004 SERIES) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

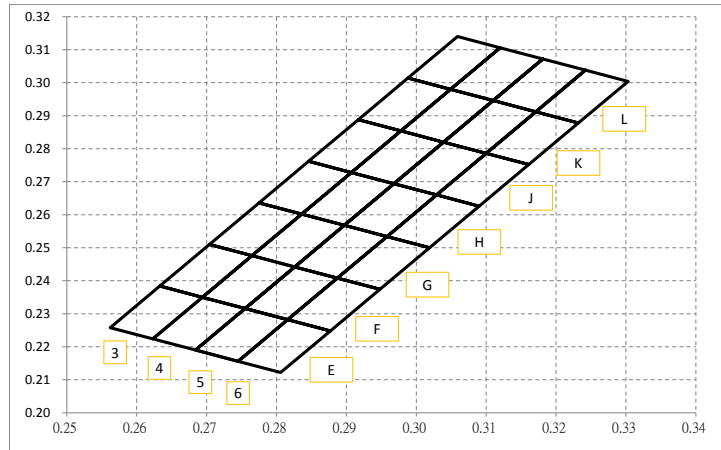

Bin code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
E5	0.2755	0.2316	E4	0.2755	0.2316	E3	0.2694	0.2350	E6	0.2816	0.2282
	0.2684	0.2190		0.2684	0.2190		0.2623	0.2224		0.2745	0.2156
	0.2745	0.2156		0.2623	0.2224		0.2562	0.2258		0.2806	0.2122
	0.2816	0.2282		0.2694	0.2350		0.2633	0.2384		0.2877	0.2248
	0.2755	0.2316		0.2755	0.2316		0.2694	0.2350		0.2816	0.2282
F5	0.2826	0.2442	F4	0.2826	0.2442	F3	0.2765	0.2476	F6	0.2887	0.2408
	0.2755	0.2316		0.2755	0.2316		0.2694	0.2350		0.2816	0.2282
	0.2816	0.2282		0.2694	0.2350		0.2633	0.2384		0.2877	0.2248
	0.2887	0.2408		0.2765	0.2476		0.2704	0.2510		0.2948	0.2374
	0.2826	0.2442		0.2826	0.2442		0.2765	0.2476		0.2887	0.2408
G5	0.2897	0.2568	G4	0.2897	0.2568	G3	0.2836	0.2602	G6	0.2958	0.2534
	0.2826	0.2442		0.2826	0.2442		0.2765	0.2476		0.2887	0.2408
	0.2887	0.2408		0.2765	0.2476		0.2704	0.2510		0.2948	0.2374
	0.2958	0.2534		0.2836	0.2602		0.2775	0.2636		0.3019	0.2500
	0.2897	0.2568		0.2897	0.2568		0.2836	0.2602		0.2958	0.2534
H5	0.2968	0.2694	H4	0.2968	0.2694	H3	0.2907	0.2728	H6	0.3029	0.2660
	0.2897	0.2568		0.2897	0.2568		0.2836	0.2602		0.2958	0.2534
	0.2958	0.2534		0.2836	0.2602		0.2775	0.2636		0.3019	0.2500
	0.3029	0.2660		0.2907	0.2728		0.2846	0.2762		0.3090	0.2626
	0.2968	0.2694		0.2968	0.2694		0.2907	0.2728		0.3029	0.2660
J5	0.3039	0.2820	J4	0.3039	0.2820	J3	0.2978	0.2854	J6	0.3100	0.2786
	0.2968	0.2694		0.2968	0.2694		0.2907	0.2728		0.3029	0.2660
	0.3029	0.2660		0.2907	0.2728		0.2846	0.2762		0.3090	0.2626
	0.3100	0.2786		0.2978	0.2854		0.2917	0.2888		0.3161	0.2752
	0.3039	0.2820		0.3039	0.2820		0.2978	0.2854		0.3100	0.2786
K5	0.3110	0.2946	K4	0.3110	0.2946	K3	0.3049	0.2980	K6	0.3171	0.2912
	0.3039	0.2820		0.3039	0.2820		0.2978	0.2854		0.3100	0.2786
	0.3100	0.2786		0.2978	0.2854		0.2917	0.2888		0.3161	0.2752
	0.3171	0.2912		0.3049	0.2980		0.2988	0.3014		0.3232	0.2878
	0.3110	0.2946		0.3110	0.2946		0.3049	0.2980		0.3171	0.2912
L5	0.3181	0.3072	L4	0.3181	0.3072	L3	0.3120	0.3106	L6	0.3242	0.3038
	0.3110	0.2946		0.3110	0.2946		0.3049	0.2980		0.3171	0.2912
	0.3171	0.2912		0.3049	0.2980		0.2988	0.3014		0.3232	0.2878
	0.3242	0.3038		0.3120	0.3106		0.3059	0.3140		0.3303	0.3004
	0.3181	0.3072		0.3181	0.3072		0.3120	0.3106		0.3242	0.3038

Luminous Flux

Bin	Unit: lm		Unit: mcd	
	Min.	Max.	Min.	Max.
B45	4.50	4.75	1605	1695
B47	4.75	5.00	1695	1785
B50	5.00	5.25	1785	1875
B52	5.25	5.50	1875	1965
B55	5.50	5.75	1965	2055
B57	5.75	6.00	2055	2145
B60	6.00	6.25	2145	2235
B62	6.25	6.50	2235	2325
B65	6.50	6.75	2325	2415
B67	6.75	7.00	2415	2505
B70	7.00	7.25	2505	2595
B72	7.25	7.50	2595	2685
B75	7.50	7.75	2685	2775
B77	7.75	8.00	2775	2865
B80	8.00	8.25	2865	2955
B82	8.25	8.50	2955	3045
B85	8.50	8.75	3045	3135
B87	8.75	9.00	3135	3225
B90	9.00	9.25	3225	3315
B92	9.25	9.50	3315	3405
B95	9.50	9.75	3405	3495
B97	9.75	10.00	3495	3585

Note: Tolerance of Luminous Flux: $\pm 7\%$

V_F (Forward Voltage Spec. Setup)


Bin	Unit: V	
	Min.	Max.
D26	2.60	2.70
D27	2.70	2.80
D28	2.80	2.90
D29	2.90	3.00
D30	3.00	3.10
D31	3.10	3.20
D32	3.20	3.30
D33	3.30	3.40
D34	3.40	3.50

Note: Tolerance of Forward Voltage: $\pm 0.05V$.

TECHNICAL DATA

SMD LED (3030/50/62 SERIES) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

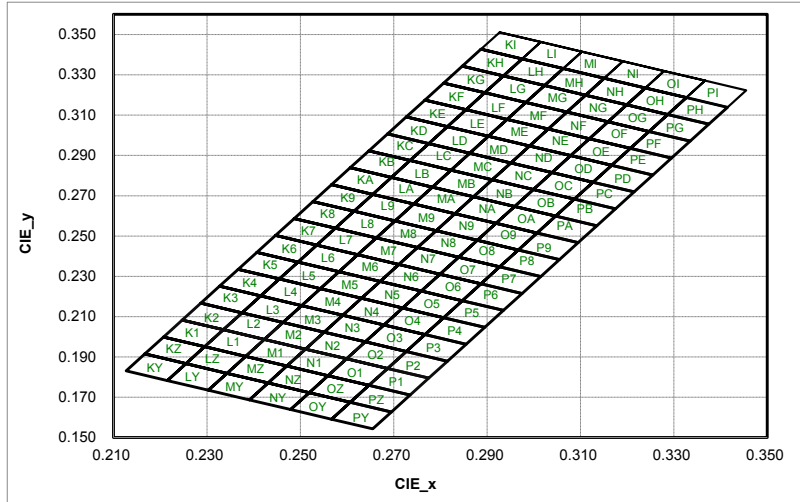

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
KY	0.2167	0.1915	KZ	0.2207	0.1999
	0.2255	0.1867		0.2295	0.1951
	0.2215	0.1783		0.2255	0.1867
	0.2127	0.1831		0.2167	0.1915
KE	0.2767	0.3175	KF	0.2807	0.3259
	0.2855	0.3127		0.2895	0.3211
	0.2815	0.3043		0.2855	0.3127
	0.2727	0.3091		0.2767	0.3175
L9	0.2655	0.2707	LA	0.2695	0.2791
	0.2743	0.2659		0.2783	0.2743
	0.2703	0.2575		0.2743	0.2659
	0.2615	0.2623		0.2655	0.2707
M4	0.2543	0.2239	M5	0.2583	0.2323
	0.2631	0.2191		0.2671	0.2275
	0.2591	0.2107		0.2631	0.2191
	0.2503	0.2155		0.2543	0.2239
NY	0.2431	0.1771	NZ	0.2471	0.1855
	0.2519	0.1723		0.2559	0.1807
	0.2479	0.1639		0.2519	0.1723
	0.2391	0.1687		0.2431	0.1771
NE	0.3031	0.3031	NF	0.3071	0.3115
	0.3119	0.2983		0.3159	0.3067
	0.3079	0.2899		0.3119	0.2983
	0.2991	0.2947		0.3031	0.3031
O9	0.2919	0.2563	OA	0.2959	0.2647
	0.3007	0.2515		0.3047	0.2599
	0.2967	0.2431		0.3007	0.2515
	0.2879	0.2479		0.2919	0.2563
P4	0.2807	0.2095	P5	0.2847	0.2179
	0.2895	0.2047		0.2935	0.2131
	0.2855	0.1963		0.2895	0.2047
	0.2767	0.2011		0.2807	0.2095

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
K1	0.2247	0.2083	K2	0.2287	0.2167	K3	0.2327	0.2251	K4	0.2367	0.2335	K5	0.2407	0.2419	K6	0.2447	0.2503
	0.2335	0.2035		0.2375	0.2119		0.2415	0.2203		0.2455	0.2287		0.2495	0.2371		0.2535	0.2455
	0.2295	0.1951		0.2335	0.2035		0.2375	0.2119		0.2415	0.2203		0.2455	0.2287		0.2495	0.2371
	0.2207	0.1999		0.2247	0.2083		0.2287	0.2167		0.2327	0.2251		0.2367	0.2335		0.2407	0.2419
KG	0.2847	0.3343	KH	0.2887	0.3427	KI	0.2927	0.3511	LY	0.2255	0.1867	LZ	0.2295	0.1951	L1	0.2335	0.2035
	0.2935	0.3295		0.2975	0.3379		0.3015	0.3463		0.2343	0.1819		0.2383	0.1903		0.2423	0.1987
	0.2895	0.3211		0.2935	0.3295		0.2975	0.3379		0.2303	0.1735		0.2343	0.1819		0.2383	0.1903
	0.2807	0.3259		0.2847	0.3343		0.2887	0.3427		0.2215	0.1783		0.2255	0.1867		0.2295	0.1951
LB	0.2735	0.2875	LC	0.2775	0.2959	LD	0.2815	0.3043	LE	0.2855	0.3127	LF	0.2895	0.3211	LG	0.2935	0.3295
	0.2823	0.2827		0.2863	0.2911		0.2903	0.2995		0.2943	0.3079		0.2983	0.3163		0.3023	0.3247
	0.2783	0.2743		0.2823	0.2827		0.2863	0.2911		0.2903	0.2995		0.2943	0.3079		0.2983	0.3163
	0.2695	0.2791		0.2735	0.2875		0.2775	0.2959		0.2815	0.3043		0.2855	0.3127		0.2895	0.3211
M6	0.2623	0.2407	M7	0.2663	0.2491	M8	0.2703	0.2575	M9	0.2743	0.2659	MA	0.2783	0.2743	MB	0.2823	0.2827
	0.2711	0.2359		0.2751	0.2443		0.2791	0.2527		0.2831	0.2611		0.2871	0.2695		0.2911	0.2779
	0.2671	0.2275		0.2711	0.2359		0.2751	0.2443		0.2791	0.2527		0.2831	0.2611		0.2871	0.2695
	0.2583	0.2323		0.2623	0.2407		0.2663	0.2491		0.2703	0.2575		0.2743	0.2659		0.2783	0.2743
N1	0.2511	0.1939	N2	0.2551	0.2023	N3	0.2591	0.2107	N4	0.2631	0.2191	N5	0.2671	0.2275	N6	0.2711	0.2359
	0.2599	0.1891		0.2639	0.1975		0.2679	0.2059		0.2719	0.2143		0.2759	0.2227		0.2799	0.2311
	0.2559	0.1807		0.2599	0.1891		0.2639	0.1975		0.2679	0.2059		0.2719	0.2143		0.2759	0.2227
	0.2471	0.1855		0.2511	0.1939		0.2551	0.2023		0.2591	0.2107		0.2631	0.2191		0.2671	0.2275
NG	0.3111	0.3199	NH	0.3151	0.3283	NI	0.3191	0.3367	OY	0.2519	0.1723	OZ	0.2559	0.1807	O1	0.2599	0.1891
	0.3199	0.3151		0.3239	0.3235		0.3279	0.3319		0.2607	0.1675		0.2647	0.1759		0.2687	0.1843
	0.3159	0.3067		0.3199	0.3151		0.3239	0.3235		0.2567	0.1591		0.2607	0.1675		0.2647	0.1759
	0.3071	0.3115		0.3111	0.3199		0.3151	0.3283		0.2479	0.1639		0.2519	0.1723		0.2559	0.1807
OB	0.2999	0.2731	OC	0.3039	0.2815	OD	0.3079	0.2899	OE	0.3119	0.2983	OF	0.3159	0.3067	OG	0.3199	0.3151
	0.3087	0.2683		0.3127	0.2767		0.3167	0.2851		0.3207	0.2935		0.3247	0.3019		0.3287	0.3103
	0.3047	0.2599		0.3087	0.2683		0.3127	0.2767		0.3167	0.2851		0.3207	0.2935		0.3247	0.3019
	0.2959	0.2647		0.2999	0.2731		0.3039	0.2815		0.3079	0.2899		0.3119	0.2983		0.3159	0.3067
P6	0.2887	0.2263	P7	0.2927	0.2347	P8	0.2967	0.2431	P9	0.3007	0.2515	PA	0.3047	0.2599	PB	0.3087	0.2683
	0.2975	0.2215		0.3015	0.2299		0.3055	0.2383		0.3095	0.2467		0.3135	0.2551		0.3175	0.2719
	0.2935	0.2131		0.2975	0.2215		0.3015	0.2299		0.3055	0.2383		0.3095	0.2467		0.3135	0.2551
	0.2847	0.2179		0.2887	0.2263		0.2927	0.2347		0.2967	0.2431		0.3007	0.2515		0.3047	0.2599

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
K8	0.2527	0.2671	K9	0.2567	0.2755	KA	0.2607	0.2839	KB	0.2647	0.2923	KC	0.2687	0.3007	KD	0.2727	0.3091
	0.2615	0.2623		0.2655	0.2707		0.2695	0.2791		0.2735	0.2875		0.2775	0.2959		0.2815	0.3043
	0.2575	0.2539		0.2615	0.2623		0.2655	0.2707		0.2695	0.2791		0.2735	0.2875		0.2775	0.2959
	0.2487	0.2587		0.2527	0.2671		0.2567	0.2755		0.2607	0.2839		0.2647	0.2923		0.2687	0.3007
L3	0.2415	0.2203	L4	0.2455	0.2287	L5	0.2495	0.2371	L6	0.2535	0.2455	L7	0.2575	0.2539	L8	0.2615	0.2623
	0.2503	0.2155		0.2543	0.2239		0.2583	0.2323		0.2623	0.2407		0.2663	0.2491		0.2703	0.2575
	0.2463	0.2071		0.2503	0.2155		0.2543	0.2239		0.2583	0.2323		0.2623	0.2407		0.2663	0.2491
	0.2375	0.2119		0.2415	0.2203		0.2455	0.2287		0.2495	0.2371		0.2535	0.2455		0.2575	0.2539
LI	0.3015	0.3463	MY	0.2343	0.1819	MZ	0.2383	0.1903	M1	0.2423	0.1987	M2	0.2463	0.2071	M3	0.2503	0.2155
	0.3103	0.3415		0.2431	0.1771		0.2471	0.1855		0.2511	0.1939		0.2551	0.2023		0.2591	0.2107
	0.3063	0.3331		0.2391	0.1687		0.2431	0.1771		0.2471	0.1855		0.2511	0.1939		0.2551	0.2023
	0.2975	0.3379		0.2303	0.1735		0.2343	0.1819		0.2383	0.1903		0.2423	0.1987		0.2463	0.2071
MD	0.2903	0.2995	ME	0.2943	0.3079	MF	0.2983	0.3163	MG	0.3023	0.3247	MH	0.3063	0.3331	MI	0.3103	0.3415
	0.2991	0.2947		0.3031	0.3031		0.3071	0.3115		0.3111	0.3199		0.3151	0.3283		0.3191	0.3367
	0.2951	0.2863		0.2991	0.2947		0.3031	0.3031		0.3071	0.3115		0.3111	0.3199		0.3151	0.3283
	0.2863	0.2911		0.2903	0.2995		0.2943	0.3079		0.2983	0.3163		0.3023	0.3247		0.3063	0.3331
N8	0.2791	0.2527	N9	0.2831	0.2611	NA	0.2871	0.2695	NB	0.2911	0.2779	NC	0.2951	0.2863	ND	0.2991	0.2947
	0.2879	0.2479		0.2919	0.2563		0.2959	0.2647		0.2999	0.2731		0.3039	0.2815		0.3079	0.2899
	0.2839	0.2395		0.2879	0.2479		0.2919	0.2563		0.2959	0.2647		0.2999	0.2731		0.3039	0.2815
	0.2751	0.2443		0.2791	0.2527		0.2831	0.2611		0.2871	0.2695		0.2911	0.2779		0.2951	0.2863
O3	0.2679	0.2059	O4	0.2719	0.2143	O5	0.2759	0.2227	O6	0.2799	0.2311	O7	0.2839	0.2395	O8	0.2879	0.2479
	0.2767	0.2011		0.2807	0.2095		0.2847	0.2179		0.2887	0.2263		0.2927	0.2347		0.2967	0.2431
	0.2727	0.1927		0.2767	0.2011		0.2807	0.2095		0.2847	0.2179		0.2887	0.2263		0.2927	0.2347
	0.2639	0.1975		0.2679	0.2059		0.2719	0.2143		0.2759	0.2227		0.2799	0.2311		0.2839	0.2395
OI	0.3279	0.3319	PY	0.2607	0.1675	PZ	0.2647	0.1759	P1	0.2687	0.1843	P2	0.2727	0.1927	P3	0.2767	0.2011
	0.3367	0.3271		0.2695	0.1627		0.2735	0.1711		0.2775	0.1795		0.2815	0.1879		0.2855	0.1963
	0.3327	0.3187		0.2655	0.1543		0.2695	0.1627		0.2735	0.1711		0.2775	0.1795		0.2815	0.1879
	0.3239	0.3235		0.2567	0.1591		0.2607	0.1675		0.2647	0.1759		0.2687	0.1843		0.2727	0.1927
PD	0.3167	0.2851	PE	0.3207	0.2935	PF	0.3247	0.3019	PG	0.3287	0.3103	PH	0.3327	0.3187	PI	0.3367	0.3271
	0.3255	0.2803		0.3295	0.2887		0.3335	0.2971		0.3375	0.3055		0.3415	0.3139		0.3455	0.3223
	0.3215	0.2719		0.3255	0.2803		0.3295	0.2887		0.3335	0.2971		0.3375	0.3055		0.3415	0.3139
	0.3127	0.2767		0.3167	0.2851		0.3207	0.2935		0.3247	0.3019		0.3287	0.3103		0.3327	0.3187

Luminous Flux

Bin	Unit: lm		Bin	Unit: lm		Bin	Unit: lm	
	Min.	Max.		Min.	Max.		Min.	Max.
H85	85	90	D10	10	11	E20	20	22
H90	90	95	D11	11	12	E22	22	24
H95	95	100	D12	12	13	E24	24	26
H100	100	105	D13	13	14	E26	26	28
H105	105	110	D14	14	15	E28	28	30
H110	110	115	D15	15	16	E30	30	32
H115	115	120	D16	16	17	E32	32	34
H120	120	125	D17	17	18	E34	34	36
H125	125	130	D18	18	19	E36	36	38
H130	130	135	D19	19	20	E38	38	40
H135	135	140	D20	20	21	E40	40	42
H140	140	145	D21	21	22	E42	42	44
H145	145	150	D22	22	23	E44	44	46
H150	150	155	D23	23	24	E46	46	48
H155	155	160	D24	24	25	E48	48	50
H160	160	165	D25	25	26	E50	50	52
H165	165	170	D26	26	27	E52	52	54
H170	170	175	D27	27	28	E54	54	56
H175	175	180	D28	28	29	E56	56	58
H180	180	185	D29	29	30	E58	58	60
H185	185	190	D30	30	31	E60	60	62
H190	190	195	D31	31	32	E62	62	64
H195	195	200	-	-	-	-	-	-

Note: Tolerance of Luminous Intensity: $\pm 7\%$.

V_F (Forward Voltage Spec. Setup)


Bin	Unit: lm	
	Min.	Max.
E28	2.8	3
E30	3	3.2
E32	3.2	3.4
E34	3.4	3.6
E36	3.6	3.8
E38	3.8	4.0
D28	2.8	2.9
D29	2.9	3
D30	3	3.1
D31	3.1	3.2
D32	3.2	3.3
D33	3.3	3.4
D34	3.4	3.5
D35	3.5	3.6

Note: Tolerance of Forward Voltage: $\pm 0.05V$.

TECHNICAL DATA

SMD LED (Local Dimming) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

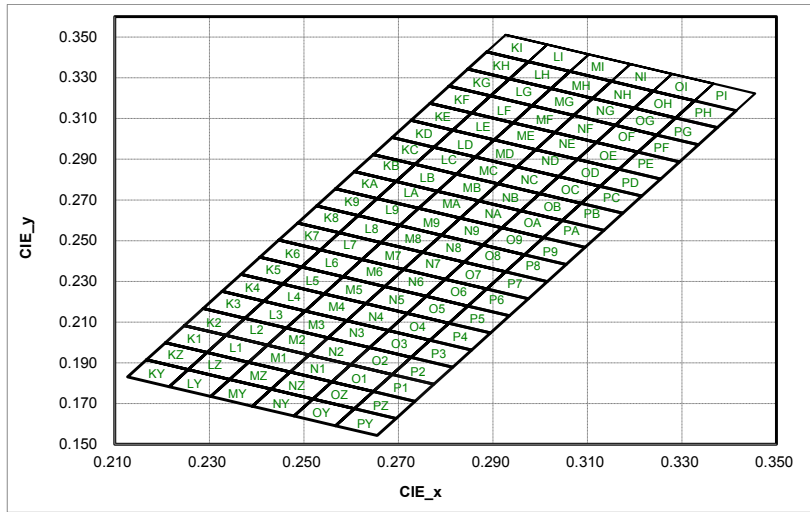

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
KY	0.2167	0.1915	KZ	0.2207	0.1999
	0.2255	0.1867		0.2295	0.1951
	0.2215	0.1783		0.2255	0.1867
	0.2127	0.1831		0.2167	0.1915
KE	0.2767	0.3175	KF	0.2807	0.3259
	0.2855	0.3127		0.2895	0.3211
	0.2815	0.3043		0.2855	0.3127
	0.2727	0.3091		0.2767	0.3175
L9	0.2655	0.2707	LA	0.2695	0.2791
	0.2743	0.2659		0.2783	0.2743
	0.2703	0.2575		0.2743	0.2659
	0.2615	0.2623		0.2655	0.2707
M4	0.2543	0.2239	M5	0.2583	0.2323
	0.2631	0.2191		0.2671	0.2275
	0.2591	0.2107		0.2631	0.2191
	0.2503	0.2155		0.2543	0.2239
NY	0.2431	0.1771	NZ	0.2471	0.1855
	0.2519	0.1723		0.2559	0.1807
	0.2479	0.1639		0.2519	0.1723
	0.2391	0.1687		0.2431	0.1771
NE	0.3031	0.3031	NF	0.3071	0.3115
	0.3119	0.2983		0.3159	0.3067
	0.3079	0.2899		0.3119	0.2983
	0.2991	0.2947		0.3031	0.3031
O9	0.2919	0.2563	OA	0.2959	0.2647
	0.3007	0.2515		0.3047	0.2599
	0.2967	0.2431		0.3007	0.2515
	0.2879	0.2479		0.2919	0.2563
P4	0.2807	0.2095	P5	0.2847	0.2179
	0.2895	0.2047		0.2935	0.2131
	0.2855	0.1963		0.2895	0.2047
	0.2767	0.2011		0.2807	0.2095

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
K1	0.2247	0.2083	K2	0.2287	0.2167	K3	0.2327	0.2251	K4	0.2367	0.2335	K5	0.2407	0.2419	K6	0.2447	0.2503
	0.2335	0.2035		0.2375	0.2119		0.2415	0.2203		0.2455	0.2287		0.2495	0.2371		0.2535	0.2455
	0.2295	0.1951		0.2335	0.2035		0.2375	0.2119		0.2415	0.2203		0.2455	0.2287		0.2495	0.2371
	0.2207	0.1999		0.2247	0.2083		0.2287	0.2167		0.2327	0.2251		0.2367	0.2335		0.2407	0.2419
KG	0.2847	0.3343	KH	0.2887	0.3427	KI	0.2927	0.3511	LY	0.2255	0.1867	LZ	0.2295	0.1951	L1	0.2335	0.2035
	0.2935	0.3295		0.2975	0.3379		0.3015	0.3463		0.2343	0.1819		0.2383	0.1903		0.2423	0.1987
	0.2895	0.3211		0.2935	0.3295		0.2975	0.3379		0.2303	0.1735		0.2343	0.1819		0.2383	0.1903
	0.2807	0.3259		0.2847	0.3343		0.2887	0.3427		0.2215	0.1783		0.2255	0.1867		0.2295	0.1951
LB	0.2735	0.2875	LC	0.2775	0.2959	LD	0.2815	0.3043	LE	0.2855	0.3127	LF	0.2895	0.3211	LG	0.2935	0.3295
	0.2823	0.2827		0.2863	0.2911		0.2903	0.2995		0.2943	0.3079		0.2983	0.3163		0.3023	0.3247
	0.2783	0.2743		0.2823	0.2827		0.2863	0.2911		0.2903	0.2995		0.2943	0.3079		0.2983	0.3163
	0.2695	0.2791		0.2735	0.2875		0.2775	0.2959		0.2815	0.3043		0.2855	0.3127		0.2895	0.3211
M6	0.2623	0.2407	M7	0.2663	0.2491	M8	0.2703	0.2575	M9	0.2743	0.2659	MA	0.2783	0.2743	MB	0.2823	0.2827
	0.2711	0.2359		0.2751	0.2443		0.2791	0.2527		0.2831	0.2611		0.2871	0.2695		0.2911	0.2779
	0.2671	0.2275		0.2711	0.2359		0.2751	0.2443		0.2791	0.2527		0.2831	0.2611		0.2871	0.2695
	0.2583	0.2323		0.2623	0.2407		0.2663	0.2491		0.2703	0.2575		0.2743	0.2659		0.2783	0.2743
N1	0.2511	0.1939	N2	0.2551	0.2023	N3	0.2591	0.2107	N4	0.2631	0.2191	N5	0.2671	0.2275	N6	0.2711	0.2359
	0.2599	0.1891		0.2639	0.1975		0.2679	0.2059		0.2719	0.2143		0.2759	0.2227		0.2799	0.2311
	0.2559	0.1807		0.2599	0.1891		0.2639	0.1975		0.2679	0.2059		0.2719	0.2143		0.2759	0.2227
	0.2471	0.1855		0.2511	0.1939		0.2551	0.2023		0.2591	0.2107		0.2631	0.2191		0.2671	0.2275
NG	0.3111	0.3199	NH	0.3151	0.3283	NI	0.3191	0.3367	OY	0.2519	0.1723	OZ	0.2559	0.1807	O1	0.2599	0.1891
	0.3199	0.3151		0.3239	0.3235		0.3279	0.3319		0.2607	0.1675		0.2647	0.1759		0.2687	0.1843
	0.3159	0.3067		0.3199	0.3151		0.3239	0.3235		0.2567	0.1591		0.2607	0.1675		0.2647	0.1759
	0.3071	0.3115		0.3111	0.3199		0.3151	0.3283		0.2479	0.1639		0.2519	0.1723		0.2559	0.1807
OB	0.2999	0.2731	OC	0.3039	0.2815	OD	0.3079	0.2899	OE	0.3119	0.2983	OF	0.3159	0.3067	OG	0.3199	0.3151
	0.3087	0.2683		0.3127	0.2767		0.3167	0.2851		0.3207	0.2935		0.3247	0.3019		0.3287	0.3103
	0.3047	0.2599		0.3087	0.2683		0.3127	0.2767		0.3167	0.2851		0.3207	0.2935		0.3247	0.3019
	0.2959	0.2647		0.2999	0.2731		0.3039	0.2815		0.3079	0.2899		0.3119	0.2983		0.3159	0.3067
P6	0.2887	0.2263	P7	0.2927	0.2347	P8	0.2967	0.2431	P9	0.3007	0.2515	PA	0.3047	0.2599	PB	0.3087	0.2683
	0.2975	0.2215		0.3015	0.2299		0.3055	0.2383		0.3095	0.2467		0.3135	0.2551		0.3175	0.2719
	0.2935	0.2131		0.2975	0.2215		0.3015	0.2299		0.3055	0.2383		0.3095	0.2467		0.3135	0.2551
	0.2847	0.2179		0.2887	0.2263		0.2927	0.2347		0.2967	0.2431		0.3007	0.2515		0.3047	0.2599

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
K8	0.2527	0.2671	K9	0.2567	0.2755	KA	0.2607	0.2839	KB	0.2647	0.2923	KC	0.2687	0.3007	KD	0.2727	0.3091
	0.2615	0.2623		0.2655	0.2707		0.2695	0.2791		0.2735	0.2875		0.2775	0.2959		0.2815	0.3043
	0.2575	0.2539		0.2615	0.2623		0.2655	0.2707		0.2695	0.2791		0.2735	0.2875		0.2775	0.2959
	0.2487	0.2587		0.2527	0.2671		0.2567	0.2755		0.2607	0.2839		0.2647	0.2923		0.2687	0.3007
L3	0.2415	0.2203	L4	0.2455	0.2287	L5	0.2495	0.2371	L6	0.2535	0.2455	L7	0.2575	0.2539	L8	0.2615	0.2623
	0.2503	0.2155		0.2543	0.2239		0.2583	0.2323		0.2623	0.2407		0.2663	0.2491		0.2703	0.2575
	0.2463	0.2071		0.2503	0.2155		0.2543	0.2239		0.2583	0.2323		0.2623	0.2407		0.2663	0.2491
	0.2375	0.2119		0.2415	0.2203		0.2455	0.2287		0.2495	0.2371		0.2535	0.2455		0.2575	0.2539
LI	0.3015	0.3463	MY	0.2343	0.1819	MZ	0.2383	0.1903	M1	0.2423	0.1987	M2	0.2463	0.2071	M3	0.2503	0.2155
	0.3103	0.3415		0.2431	0.1771		0.2471	0.1855		0.2511	0.1939		0.2551	0.2023		0.2591	0.2107
	0.3063	0.3331		0.2391	0.1687		0.2431	0.1771		0.2471	0.1855		0.2511	0.1939		0.2551	0.2023
	0.2975	0.3379		0.2303	0.1735		0.2343	0.1819		0.2383	0.1903		0.2423	0.1987		0.2463	0.2071
MD	0.2903	0.2995	ME	0.2943	0.3079	MF	0.2983	0.3163	MG	0.3023	0.3247	MH	0.3063	0.3331	MI	0.3103	0.3415
	0.2991	0.2947		0.3031	0.3031		0.3071	0.3115		0.3111	0.3199		0.3151	0.3283		0.3191	0.3367
	0.2951	0.2863		0.2991	0.2947		0.3031	0.3031		0.3071	0.3115		0.3111	0.3199		0.3151	0.3283
	0.2863	0.2911		0.2903	0.2995		0.2943	0.3079		0.2983	0.3163		0.3023	0.3247		0.3063	0.3331
N8	0.2791	0.2527	N9	0.2831	0.2611	NA	0.2871	0.2695	NB	0.2911	0.2779	NC	0.2951	0.2863	ND	0.2991	0.2947
	0.2879	0.2479		0.2919	0.2563		0.2959	0.2647		0.2999	0.2731		0.3039	0.2815		0.3079	0.2899
	0.2839	0.2395		0.2879	0.2479		0.2919	0.2563		0.2959	0.2647		0.2999	0.2731		0.3039	0.2815
	0.2751	0.2443		0.2791	0.2527		0.2831	0.2611		0.2871	0.2695		0.2911	0.2779		0.2951	0.2863
O3	0.2679	0.2059	O4	0.2719	0.2143	O5	0.2759	0.2227	O6	0.2799	0.2311	O7	0.2839	0.2395	O8	0.2879	0.2479
	0.2767	0.2011		0.2807	0.2095		0.2847	0.2179		0.2887	0.2263		0.2927	0.2347		0.2967	0.2431
	0.2727	0.1927		0.2767	0.2011		0.2807	0.2095		0.2847	0.2179		0.2887	0.2263		0.2927	0.2347
	0.2639	0.1975		0.2679	0.2059		0.2719	0.2143		0.2759	0.2227		0.2799	0.2311		0.2839	0.2395
OI	0.3279	0.3319	PY	0.2607	0.1675	PZ	0.2647	0.1759	P1	0.2687	0.1843	P2	0.2727	0.1927	P3	0.2767	0.2011
	0.3367	0.3271		0.2695	0.1627		0.2735	0.1711		0.2775	0.1795		0.2815	0.1879		0.2855	0.1963
	0.3327	0.3187		0.2655	0.1543		0.2695	0.1627		0.2735	0.1711		0.2775	0.1795		0.2815	0.1879
	0.3239	0.3235		0.2567	0.1591		0.2607	0.1675		0.2647	0.1759		0.2687	0.1843		0.2727	0.1927
PD	0.3167	0.2851	PE	0.3207	0.2935	PF	0.3247	0.3019	PG	0.3287	0.3103	PH	0.3327	0.3187	PI	0.3367	0.3271
	0.3255	0.2803		0.3295	0.2887		0.3335	0.2971		0.3375	0.3055		0.3415	0.3139		0.3455	0.3223
	0.3215	0.2719		0.3255	0.2803		0.3295	0.2887		0.3335	0.2971		0.3375	0.3055		0.3415	0.3139
	0.3127	0.2767		0.3167	0.2851		0.3207	0.2935		0.3247	0.3019		0.3287	0.3103		0.3327	0.3187

Luminous Flux

Bin	Unit: lm	
	Min.	Max.
C0	0.00	0.50
C5	0.50	1.00
C10	1.00	1.50
C15	1.50	2.00
C20	2.00	2.50
C25	2.50	3.00
C30	3.00	3.50
C35	3.50	4.00
C40	4.00	4.50
C45	4.50	5.00
C50	5.00	5.50
C55	5.50	6.00
C60	6.00	6.50
C65	6.50	7.00
C70	7.00	7.50
C75	7.50	8.00
C80	8.00	8.50

Radiant Power

Bin	Unit: lm	
	Min.	Max.
E0	0.00	2.00
E2	2.00	4.00
E4	4.00	6.00
E6	6.00	8.00
E8	8.00	10.00
E10	10.00	12.00
E12	12.00	14.00
E14	14.00	16.00
E16	16.00	18.00
E18	18.00	20.00
E20	20.00	22.00
E22	22.00	24.00
E24	24.00	26.00
E26	26.00	28.00
E28	28.00	30.00

V_F (Forward Voltage Spec. Setup)

Bin	Unit: lm	
	Min.	Max.
D28	2.80	2.90
D29	2.90	3.00
D30	3.00	3.10
D31	3.10	3.20
D32	3.20	3.30
C270	2.70	2.75
C275	2.75	2.80
C280	2.80	2.85
C285	2.85	2.90
C290	2.90	2.95

Note: Tolerance of Luminous Intensity: ±7%.

Note: Tolerance of Luminous Intensity: ±7%.

Note: Tolerance of Forward Voltage: ±0.05

TECHNICAL DATA

LED LAMPs
BRIGHTNESS BIN SELECTION

Brightness Bin Selection

Unit : mcd


Item	Intensity Iv (mcd)	
Bin Code	Min.	Max.
a7	6.0	8.0
a6	8.0	10.0
a5	10.0	12.0
a4	12.0	15.0
a3	15.0	18.0
a2	18.0	22.0
a1	22.0	28.0
0	28.0	35.0
1	35.0	42.0
2	42.0	50.0
3	50.0	60.0
4	60.0	70.0
5	70.0	85.0
6	85.0	100
7	100	120
8	120	140
9	140	170
A	170	200
B	200	240
C	240	285
D	285	360
E	360	450
F	450	565
G	565	715
H	715	900
J	900	1,125
K	1,125	1,425
L	1,425	1,800
M	1,800	2,250
N	2,250	2,850
P	2,850	3,600
Q	3,600	4,500
R	4,500	5,650
S	5,650	7,150
T	7,150	9,000
U	9,000	11,250
V	11,250	14,250
W	14,250	18,000
X	18,000	22,500
Y	22,500	28,500
Z	28,500	36,000

Cool White / CIE Chromaticity Diagram

(If=20mA / Ta=25°C)

Color Ranks		CIE			
A1	X	0.255	0.264	0.280	0.270
	Y	0.245	0.267	0.248	0.230
A0	X	0.264	0.283	0.296	0.280
	Y	0.267	0.305	0.267	0.248
B3	X	0.283	0.304	0.307	0.287
	Y	0.305	0.330	0.315	0.295
B4	X	0.304	0.330	0.330	0.307
	Y	0.330	0.360	0.339	0.315
B5	X	0.287	0.307	0.311	0.296
	Y	0.295	0.315	0.294	0.276
B6	X	0.307	0.330	0.330	0.311
	Y	0.315	0.339	0.318	0.294
C0	X	0.330	0.361	0.355	0.330
	Y	0.360	0.385	0.350	0.318

Note: Measurement uncertainty of the color coordinates ±0.01.

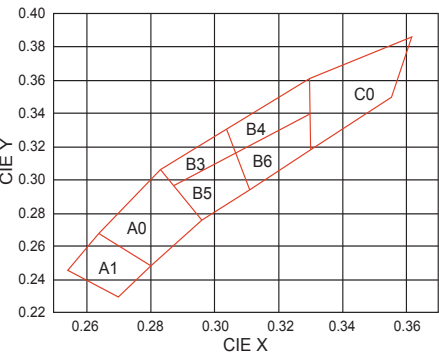


Warm White / CIE Chromaticity Diagram

(If=20mA / Ta=25°C)

Color Ranks		CIE			
D1	X	0.357	0.361	0.398	0.389
	Y	0.361	0.385	0.411	0.382
D2	X	0.354	0.357	0.389	0.382
	Y	0.340	0.361	0.382	0.358
E1	X	0.389	0.398	0.439	0.425
	Y	0.382	0.411	0.431	0.400
E2	X	0.382	0.389	0.425	0.412
	Y	0.358	0.382	0.400	0.372
F1	X	0.425	0.439	0.497	0.477
	Y	0.400	0.431	0.466	0.413
F2	X	0.412	0.425	0.477	0.458
	Y	0.372	0.400	0.413	0.383

Note: Measurement uncertainty of the color coordinates ±0.01.

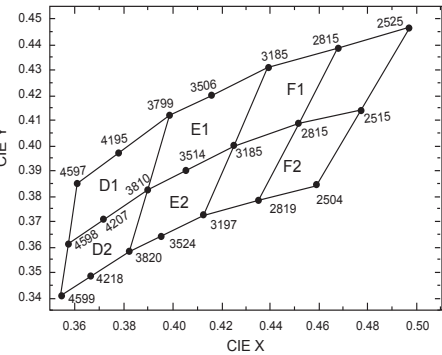


DIGITAL DISPLAY
BRIGHTNESS BIN SELECTION


Bin Code	Brightness Range (μcd)	
	Min.	Max.
C	70	140
D	110	220
E	180	360
F	280	560
G	450	900
H	750	1200
J	1050	1680
K	1400	2300
L	2000	3200
M	2800	4500
N	4000	6400
P	5600	8900
Q	7800	12500
R	11000	17600
S	15000	24000
T	21000	34000
U	30000	48000
V	42000	67000
W	59000	94000
X	83000	133000
Y	116000	186000
Z	158800	254000

AUTOMOTIVE BIN SELECTION

Exterior White / Cool-White Bin Structure

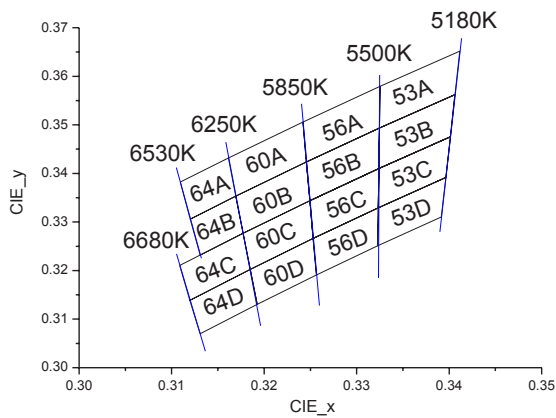

Amber Bin Structure

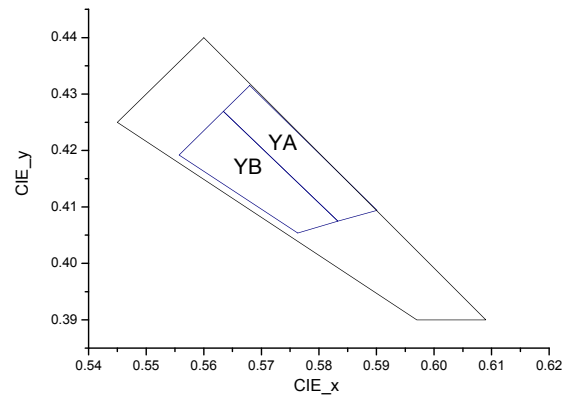

Cool-White Bin Coordinates

Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y
64A	0.3109	0.3382	60C	0.3177	0.3277	53A	0.3325	0.3579
	0.3161	0.3432		0.3249	0.3344		0.3412	0.3652
	0.3169	0.3353		0.3253	0.3266		0.3406	0.3562
	0.3120	0.3306		0.3185	0.3203		0.3325	0.3493
Reference Range: 6240~6530K			Reference Range: 5850~6240K			Reference Range: 5180~5500K		
64B	0.3120	0.3306	60D	0.3185	0.3203	53B	0.3325	0.3493
	0.3169	0.3353		0.3253	0.3266		0.3406	0.3562
	0.3177	0.3277		0.3256	0.3191		0.3401	0.3476
	0.3131	0.3232		0.3192	0.3131		0.3324	0.3410
Reference Range: 6240~6530K			Reference Range: 5850~6240K			Reference Range: 5180~5500K		
64C	0.3109	0.3211	56A	0.3242	0.3506	53C	0.3324	0.3410
	0.3177	0.3277		0.3325	0.3579		0.3401	0.3476
	0.3185	0.3203		0.3325	0.3493		0.3396	0.3392
	0.3120	0.3139		0.3246	0.3424		0.3323	0.3329
Reference Range: 6240~6680K			Reference Range: 5500~5850K			Reference Range: 5180~5500K		
64D	0.3120	0.3139	56B	0.3246	0.3424	53D	0.3323	0.3329
	0.3185	0.3203		0.3325	0.3493		0.3396	0.3392
	0.3192	0.3131		0.3324	0.3410		0.3392	0.3310
	0.3131	0.3070		0.3249	0.3344		0.3323	0.3251
Reference Range: 6240~6680K			Reference Range: 5500~5850K			Reference Range: 5180~5500K		
60A	0.3161	0.3432	56C	0.3249	0.3344			
	0.3242	0.3506		0.3324	0.3410			
	0.3246	0.3424		0.3323	0.3329			
	0.3169	0.3353		0.3253	0.3266			
Reference Range: 5850~6240K			Reference Range: 5500~5850K					
60B	0.3169	0.3353	56D	0.3253	0.3266			
	0.3246	0.3424		0.3323	0.3329			
	0.3249	0.3344		0.3323	0.3251			
	0.3177	0.3277		0.3256	0.3191			
Reference Range: 5850~6240K			Reference Range: 5500~5850K					


Amber Bin Coordinates

Bin	CIE X	CIE Y
YA	0.5680	0.4315
	0.5634	0.4269
	0.5833	0.4075
	0.5901	0.4094
YB	0.5763	0.4054
	0.5833	0.4075
	0.5634	0.4269
	0.5557	0.4192

TECHNICAL DATA

AUTOMOTIVE BIN SELECTION

Interior / White

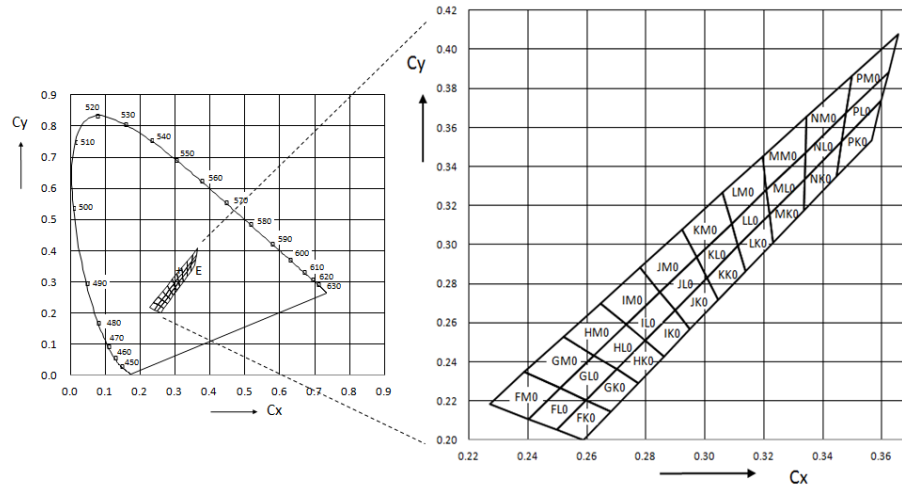


Bin Range of Chromaticity Coordinates Specifications

Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
FK0	0.2589	0.2000	NK0	0.3339	0.3336	LL0	0.3113	0.2992	JM0	0.2848	0.2757
	0.2498	0.2053		0.3335	0.3172		0.3090	0.3108		0.2780	0.2883
	0.2597	0.2204		0.3447	0.3347		0.3209	0.3281		0.2922	0.3077
	0.2682	0.2146		0.3465	0.3530		0.3219	0.3154		0.2971	0.2935
GK0	0.2682	0.2146	PK0	0.3465	0.3530	ML0	0.3341	0.3472	KM0	0.2971	0.2935
	0.2597	0.2204		0.3447	0.3347		0.3209	0.3281		0.2922	0.3077
	0.2700	0.2361		0.3567	0.3535		0.3219	0.3154		0.3060	0.3266
	0.2775	0.2292		0.3599	0.3735		0.3339	0.3336		0.3090	0.3108
HK0	0.2775	0.2292	FL0	0.2498	0.2053	NL0	0.3341	0.3472	LM0	0.3090	0.3108
	0.2700	0.2361		0.2402	0.2108		0.3339	0.3336		0.3060	0.3266
	0.2797	0.2509		0.2509	0.2264		0.3465	0.3530		0.3196	0.3451
	0.2861	0.2427		0.2597	0.2204		0.3479	0.3673		0.3209	0.3281
IK0	0.2861	0.2427	GL0	0.2597	0.2204	PL0	0.3479	0.3673	MM0	0.3345	0.3654
	0.2797	0.2509		0.2509	0.2264		0.3465	0.3530		0.3196	0.3451
	0.2898	0.2664		0.2624	0.2431		0.3599	0.3735		0.3209	0.3281
	0.2950	0.2568		0.2700	0.2361		0.3623	0.3882		0.3341	0.3472
JK0	0.2950	0.2568	HL0	0.2700	0.2361	FM0	0.2388	0.2348	NM0	0.3345	0.3654
	0.2898	0.2664		0.2624	0.2431		0.2269	0.2185		0.3341	0.3472
	0.3007	0.2830		0.2733	0.2590		0.2402	0.2108		0.3479	0.3673
	0.3045	0.2717		0.2797	0.2509		0.2509	0.2264		0.3498	0.3863
KK0	0.3045	0.2717	IL0	0.2797	0.2509	GM0	0.2509	0.2264	PM0	0.3498	0.3863
	0.3007	0.2830		0.2733	0.2590		0.2388	0.2348		0.3479	0.3673
	0.3113	0.2992		0.2848	0.2757		0.2520	0.2527		0.3623	0.3882
	0.3138	0.2862		0.2898	0.2664		0.2624	0.2431		0.3655	0.4079
LK0	0.3138	0.2862	JL0	0.2898	0.2664	HM0	0.2624	0.2431			
	0.3113	0.2992		0.2848	0.2757		0.2530	0.2527			
	0.3219	0.3154		0.2971	0.2935		0.2646	0.2700			
	0.3231	0.3008		0.3007	0.2830		0.2733	0.2590			
MK0	0.3339	0.3336	KL0	0.3007	0.2830	IM0	0.2733	0.2590			
	0.3219	0.3154		0.2971	0.2935		0.2646	0.2700			
	0.3231	0.3008		0.3090	0.3108		0.2780	0.2883			
	0.3335	0.3172		0.3113	0.2992		0.2848	0.2757			

Notes: Tolerance of Chromaticity Coordinates: ± 0.01

AUTOMOTIVE
BIN SELECTION

Interior / Sky Blue

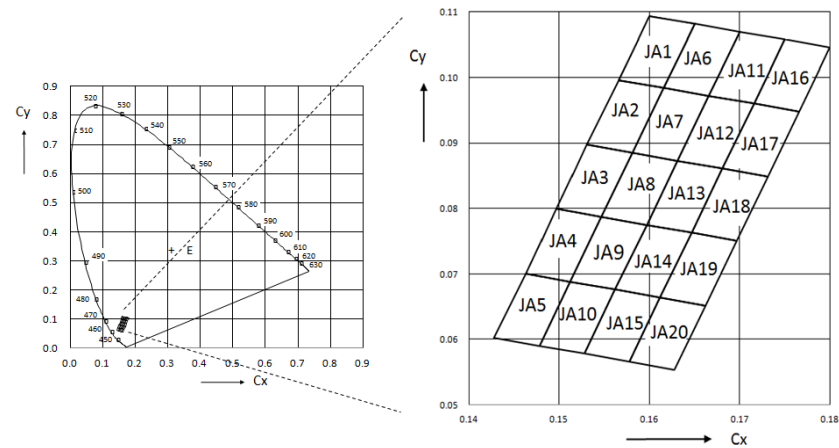


Bin Range of Chromaticity Coordinates Specifications

Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
JA1	0.1600	0.1094	JA9	0.1547	0.0787	JA17	0.1716	0.0960
	0.1650	0.1082		0.1597	0.0775		0.1766	0.0948
	0.1616	0.0984		0.1562	0.0676		0.1731	0.0849
	0.1566	0.0996		0.1512	0.0688		0.1681	0.0861
JA2	0.1566	0.0996	JA10	0.1512	0.0688	JA18	0.1681	0.0861
	0.1616	0.0984		0.1562	0.0676		0.1731	0.0849
	0.1581	0.0885		0.1528	0.0578		0.1697	0.0751
	0.1531	0.0897		0.1478	0.0590		0.1647	0.0763
JA3	0.1531	0.0897	JA11	0.1700	0.1070	JA19	0.1647	0.0763
	0.1581	0.0885		0.1750	0.1058		0.1697	0.0751
	0.1547	0.0787		0.1716	0.0960		0.1662	0.0652
	0.1497	0.0799		0.1666	0.0972		0.1612	0.0664
JA4	0.1497	0.0799	JA12	0.1666	0.0972	JA20	0.1612	0.0664
	0.1547	0.0787		0.1716	0.0960		0.1662	0.0652
	0.1512	0.0688		0.1681	0.0861		0.1628	0.0554
	0.1463	0.0700		0.1631	0.0873		0.1578	0.0566
JA5	0.1463	0.0700	JA13	0.1631	0.0873			
	0.1512	0.0688		0.1681	0.0861			
	0.1478	0.0590		0.1647	0.0763			
	0.1428	0.0602		0.1597	0.0775			
JA6	0.1650	0.1082	JA14	0.1597	0.0775			
	0.1700	0.1070		0.1647	0.0763			
	0.1666	0.0972		0.1612	0.0664			
	0.1616	0.0984		0.1562	0.0676			
JA7	0.1616	0.0984	JA15	0.1562	0.0676			
	0.1666	0.0972		0.1612	0.0664			
	0.1631	0.0873		0.1578	0.0566			
	0.1581	0.0885		0.1528	0.0578			
JA8	0.1581	0.0885	JA16	0.1750	0.1058			
	0.1631	0.0873		0.1800	0.1046			
	0.1597	0.0775		0.1766	0.0948			
	0.1547	0.0787		0.1716	0.0960			

AUTOMOTIVE
BIN SELECTION

Interior / Ice Blue

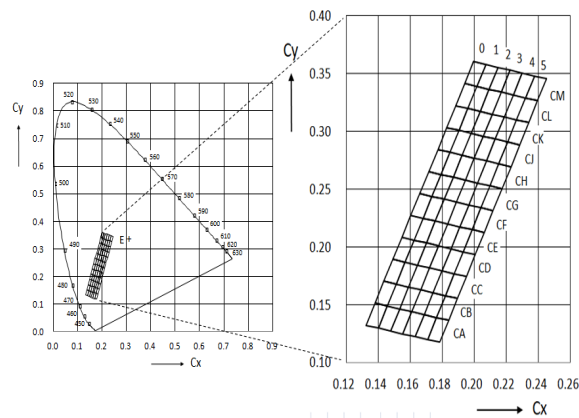

Bin Range of Chromaticity Coordinates Specifications

Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
CM0	0.1940	0.3415	CL1	0.1960	0.3200
	0.1996	0.3605		0.2016	0.3390
	0.2072	0.3580		0.2092	0.3366
	0.2016	0.3390		0.2036	0.3176
CM1	0.2016	0.3390	CL2	0.2036	0.3176
	0.2072	0.3580		0.2092	0.3366
	0.2148	0.3556		0.2168	0.3341
	0.2092	0.3366		0.2112	0.3151
CM2	0.2092	0.3366	CL3	0.2112	0.3151
	0.2148	0.3556		0.2168	0.3341
	0.2224	0.3531		0.2244	0.3316
	0.2168	0.3341		0.2188	0.3126
CM3	0.2168	0.3341	CL4	0.2188	0.3126
	0.2224	0.3531		0.2244	0.3316
	0.2299	0.3506		0.2319	0.3291
	0.2244	0.3316		0.2264	0.3101
CM4	0.2244	0.3316	CL5	0.2264	0.3101
	0.2299	0.3506		0.2319	0.3291
	0.2375	0.3481		0.2395	0.3267
	0.2319	0.3291		0.2340	0.3077
CM5	0.2319	0.3291	CK0	0.1828	0.3035
	0.2375	0.3481		0.1884	0.3225
	0.2451	0.3457		0.1960	0.3200
	0.2395	0.3267		0.1904	0.3010
CL0	0.1884	0.3225	CK1	0.1904	0.3010
	0.1940	0.3415		0.1960	0.3200
	0.2016	0.3390		0.2036	0.3176
	0.1960	0.3200		0.1980	0.2986



Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
CK2	0.1980	0.2986	CH1	0.1792	0.2630
	0.2036	0.3176		0.1848	0.2820
	0.2112	0.3151		0.1924	0.2796
	0.2056	0.2961		0.1869	0.2606
CK3	0.2056	0.2961	CH2	0.1869	0.2606
	0.2112	0.3151		0.1924	0.2796
	0.2188	0.3126		0.2000	0.2771
	0.2132	0.2936		0.1945	0.2581
CK4	0.2132	0.2936	CH3	0.1945	0.2581
	0.2188	0.3126		0.2000	0.2771
	0.2264	0.3101		0.2077	0.2746
	0.2208	0.2911		0.2021	0.2556
CK5	0.2208	0.2911	CH4	0.2021	0.2556
	0.2264	0.3101		0.2077	0.2746
	0.2340	0.3077		0.2153	0.2721
	0.2284	0.2887		0.2097	0.2531
CJ0	0.1772	0.2845	CH5	0.2097	0.2531
	0.1828	0.3035		0.2153	0.2721
	0.1904	0.3010		0.2229	0.2697
	0.1848	0.2820		0.2173	0.2507
CJ1	0.1848	0.2820	CG0	0.1660	0.2465
	0.1904	0.3010		0.1716	0.2655
	0.1980	0.2986		0.1792	0.2630
	0.1924	0.2796		0.1736	0.2440
CJ2	0.1924	0.2796	CG1	0.1736	0.2440
	0.1980	0.2986		0.1792	0.2630
	0.2056	0.2961		0.1869	0.2606
	0.2000	0.2771		0.1813	0.2416
CJ3	0.2000	0.2771	CG2	0.1813	0.2416
	0.2056	0.2961		0.1869	0.2606
	0.2132	0.2936		0.1945	0.2581
	0.2077	0.2746		0.1889	0.2391
CJ4	0.2077	0.2746	CG3	0.1889	0.2391
	0.2132	0.2936		0.1945	0.2581
	0.2208	0.2911		0.2021	0.2556
	0.2153	0.2721		0.1965	0.2366
CJ5	0.2153	0.2721	CG4	0.1965	0.2366
	0.2208	0.2911		0.2021	0.2556
	0.2284	0.2887		0.2097	0.2531
	0.2229	0.2697		0.2043	0.2341
CH0	0.1716	0.2655	CG5	0.2043	0.2341
	0.1772	0.2845		0.2097	0.2531
	0.1848	0.2820		0.2173	0.2507
	0.1792	0.2630		0.2118	0.2317

Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
CF0	0.1604	0.2275	CE5	0.1930	0.1961
	0.1660	0.2465		0.1986	0.2151
	0.1736	0.2440		0.2062	0.2127
	0.1680	0.2250		0.2007	0.1937
CF1	0.1680	0.2250	CD0	0.1492	0.1895
	0.1736	0.2440		0.1548	0.2085
	0.1813	0.2416		0.1624	0.2060
	0.1757	0.2226		0.1568	0.1870
CF2	0.1757	0.2226	CD1	0.1568	0.1870
	0.1813	0.2416		0.1624	0.2060
	0.1889	0.2391		0.1701	0.2036
	0.1833	0.2201		0.1645	0.1846
CF3	0.1833	0.2201	CD2	0.1645	0.1846
	0.1889	0.2391		0.1701	0.2036
	0.1965	0.2366		0.1777	0.2011
	0.1909	0.2176		0.1721	0.1821
CF4	0.1909	0.2176	CD3	0.1721	0.1821
	0.1965	0.2366		0.1777	0.2011
	0.2043	0.2341		0.1854	0.1986
	0.1986	0.2151		0.1798	0.1796
CF5	0.1986	0.2151	CD4	0.1798	0.1796
	0.2043	0.2341		0.1854	0.1986
	0.2118	0.2317		0.1930	0.1961
	0.2062	0.2127		0.1875	0.1771
CE0	0.1548	0.2085	CD5	0.1875	0.1771
	0.1604	0.2275		0.1930	0.1961
	0.1680	0.2250		0.2007	0.1937
	0.1624	0.2060		0.1951	0.1747
CE1	0.1624	0.2060	CC0	0.1436	0.1705
	0.1680	0.2250		0.1492	0.1895
	0.1757	0.2226		0.1568	0.1870
	0.1701	0.2036		0.1513	0.1680
CE2	0.1701	0.2036	CC1	0.1513	0.1680
	0.1757	0.2226		0.1568	0.1870
	0.1833	0.2201		0.1645	0.1846
	0.1777	0.2011		0.1589	0.1656
CE3	0.1777	0.2011	CC2	0.1589	0.1656
	0.1833	0.2201		0.1645	0.1846
	0.1909	0.2176		0.1721	0.1821
	0.1854	0.1986		0.1666	0.1631
CE4	0.1854	0.1986	CC3	0.1666	0.1631
	0.1909	0.2176		0.1721	0.1821
	0.1986	0.2151		0.1798	0.1796
	0.1930	0.1961		0.1742	0.1606

Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
CC4	0.1742	0.1606	CB5	0.1764	0.1391
	0.1798	0.1796		0.1819	0.1581
	0.1875	0.1771		0.1896	0.1557
	0.1819	0.1581		0.1840	0.1367
CC5	0.1819	0.1581	CA0	0.1324	0.1325
	0.1875	0.1771		0.1380	0.1515
	0.1951	0.1747		0.1457	0.1490
	0.1896	0.1557		0.1401	0.1300
CB0	0.1380	0.1515	CA1	0.1401	0.1300
	0.1436	0.1705		0.1457	0.1490
	0.1513	0.1680		0.1533	0.1466
	0.1457	0.1490		0.1477	0.1276
CB1	0.1457	0.1490	CA2	0.1477	0.1276
	0.1513	0.1680		0.1533	0.1466
	0.1589	0.1656		0.1610	0.1441
	0.1533	0.1466		0.1554	0.1251
CB2	0.1533	0.1466	CA3	0.1554	0.1251
	0.1589	0.1656		0.1610	0.1441
	0.1666	0.1631		0.1687	0.1416
	0.1610	0.1441		0.1631	0.1226
CB3	0.1610	0.1441	CA4	0.1631	0.1226
	0.1666	0.1631		0.1687	0.1416
	0.1742	0.1606		0.1764	0.1391
	0.1687	0.1416		0.1708	0.1201
CB4	0.1687	0.1416	CA5	0.1708	0.1201
	0.1742	0.1606		0.1764	0.1391
	0.1819	0.1581		0.1840	0.1367
	0.1764	0.1391		0.1785	0.1177

AUTOMOTIVE
BIN SELECTION


Interior / 5630/2835

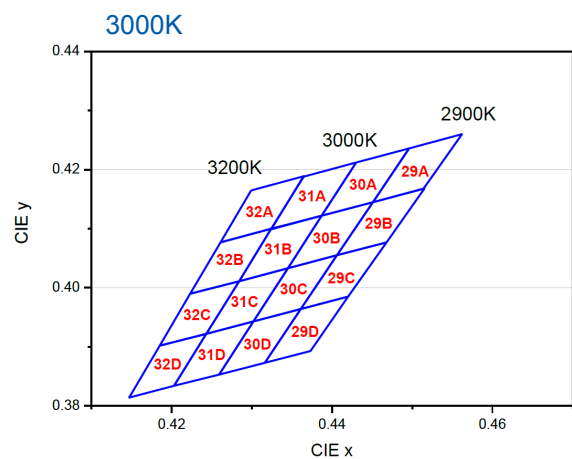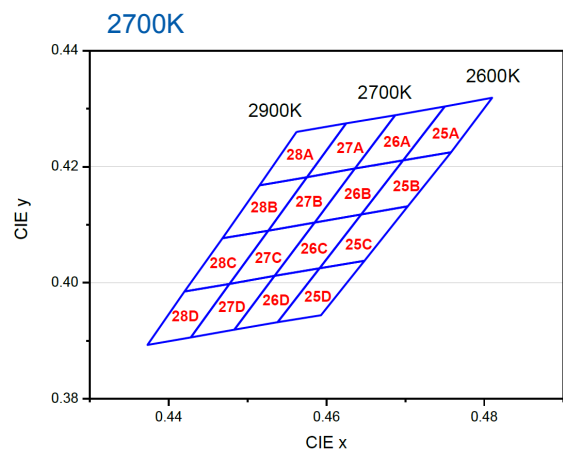


Bin Range of Chromaticity Coordinates Specifications

CCT	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
2700K	25A	0.4750	0.4304	25B	0.4697	0.4211
		0.4697	0.4211		0.4644	0.4118
		0.4758	0.4225		0.4703	0.4132
		0.4810	0.4319		0.4758	0.4225
	25C	0.4644	0.4118	25D	0.4591	0.4025
		0.4591	0.4025		0.4538	0.3932
		0.4648	0.4038		0.4593	0.3944
		0.4703	0.4132		0.4648	0.4038
	26A	0.4687	0.4289	26B	0.4636	0.4197
		0.4636	0.4197		0.4585	0.4104
		0.4697	0.4211		0.4644	0.4118
		0.4750	0.4304		0.4697	0.4211
	26C	0.4585	0.4104	26D	0.4534	0.4012
		0.4534	0.4012		0.4483	0.3919
		0.4591	0.4025		0.4538	0.3932
		0.4644	0.4118		0.4591	0.4025
	27A	0.4625	0.4275	27B	0.4575	0.4182
		0.4575	0.4182		0.4526	0.4090
		0.4636	0.4197		0.4585	0.4104
		0.4687	0.4289		0.4636	0.4197
	27C	0.4526	0.4090	27D	0.4477	0.3998
		0.4477	0.3998		0.4428	0.3906
		0.4534	0.4012		0.4483	0.3919
		0.4585	0.4104		0.4534	0.4012
	28A	0.4562	0.4260	28B	0.4515	0.4168
		0.4515	0.4168		0.4468	0.4077
		0.4575	0.4182		0.4526	0.4090
		0.4625	0.4275		0.4575	0.4182
	28C	0.4468	0.4077	28D	0.4420	0.3985
		0.4420	0.3985		0.4373	0.3893
		0.4477	0.3998		0.4428	0.3906
		0.4526	0.4090		0.4477	0.3998

CCT	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
3000K	29A	0.4496	0.4236	29B	0.4451	0.4145
		0.4451	0.4145		0.4406	0.4055
		0.4514	0.4168		0.4468	0.4077
		0.4562	0.4260		0.4515	0.4168
	29C	0.4406	0.4055	29D	0.4361	0.3964
		0.4361	0.3964		0.4316	0.3873
		0.4420	0.3985		0.4373	0.3893
		0.4468	0.4077		0.4420	0.3985
	30A	0.4430	0.4212	30B	0.4387	0.4122
		0.4387	0.4122		0.4345	0.4033
		0.4451	0.4145		0.4406	0.4055
		0.4496	0.4236		0.4451	0.4145
	30C	0.4345	0.4033	30D	0.4302	0.3943
		0.4302	0.3943		0.4259	0.3853
		0.4361	0.3964		0.4316	0.3873
		0.4406	0.4055		0.4361	0.3964
	31A	0.4364	0.4188	31B	0.4324	0.4100
		0.4324	0.4099		0.4284	0.4011
		0.4387	0.4122		0.4345	0.4033
		0.4430	0.4212		0.4387	0.4122
	31C	0.4284	0.4011	31D	0.4302	0.3943
		0.4243	0.3922		0.4259	0.3853
		0.4302	0.3943		0.4203	0.3834
		0.4345	0.4033		0.4243	0.3922
	32A	0.4299	0.4165	32B	0.4261	0.4077
		0.4261	0.4077		0.4223	0.3990
		0.4324	0.4100		0.4284	0.4011
		0.4365	0.4189		0.4324	0.4100
	32C	0.4223	0.3990	32D	0.4243	0.3922
		0.4185	0.3902		0.4203	0.3834
		0.4243	0.3922		0.4147	0.3814
		0.4284	0.4011		0.4185	0.3902

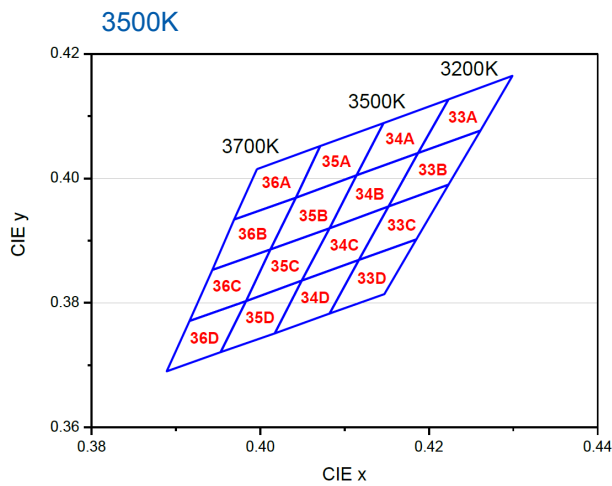

Bin Range of Chromaticity Coordinates Specifications

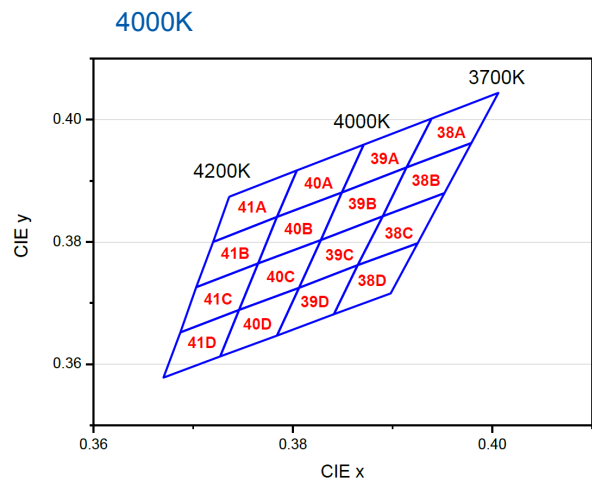

Bin Range of Chromaticity Coordinates Specifications


CCT	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
3500K	33A	0.4223	0.4127	33B	0.4187	0.4041
		0.4187	0.4041		0.4152	0.3955
		0.4261	0.4077		0.4223	0.3990
		0.4299	0.4165		0.4261	0.4077
	33C	0.4152	0.3955	33D	0.4117	0.3869
		0.4117	0.3869		0.4082	0.3783
		0.4185	0.3902		0.4147	0.3814
		0.4223	0.3990		0.4185	0.3902
	34A	0.4146	0.4089	34B	0.4114	0.4005
		0.4114	0.4005		0.4082	0.3920
		0.4187	0.4041		0.4152	0.3955
		0.4223	0.4127		0.4187	0.4041
	34C	0.4082	0.3920	34D	0.4049	0.3836
		0.4049	0.3836		0.4017	0.3751
		0.4117	0.3869		0.4082	0.3783
		0.4152	0.3955		0.4117	0.3869
	35A	0.4071	0.4052	35B	0.4042	0.3969
		0.4042	0.3969		0.4012	0.3886
		0.4114	0.4005		0.4082	0.3920
		0.4146	0.4089		0.4114	0.4005
	35C	0.4012	0.3886	35D	0.3983	0.3803
		0.3983	0.3803		0.3953	0.3721
		0.4049	0.3836		0.4017	0.3751
		0.4082	0.3920		0.4049	0.3836
	36A	0.3996	0.4015	36B	0.3969	0.3934
		0.3969	0.3934		0.3943	0.3853
		0.4042	0.3969		0.4012	0.3886
		0.4071	0.4052		0.4042	0.3969
	36C	0.3943	0.3853	36D	0.3916	0.3771
		0.3916	0.3771		0.3889	0.3690
		0.3983	0.3803		0.3953	0.3721
		0.4012	0.3886		0.3983	0.3803

CCT	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
4000K	38A	0.3939	0.4002	38B	0.3914	0.3922
		0.3914	0.3922		0.3890	0.3842
		0.3979	0.3962		0.3952	0.3880
		0.4006	0.4044		0.3979	0.3962
	38C	0.3890	0.3842	38D	0.3865	0.3762
		0.3865	0.3762		0.3841	0.3682
		0.3925	0.3798		0.3898	0.3716
		0.3952	0.3880		0.3925	0.3798
	39A	0.3871	0.3959	39B	0.3849	0.3881
		0.3849	0.3881		0.3828	0.3803
		0.3914	0.3922		0.3890	0.3842
		0.3939	0.4002		0.3914	0.3922
	39C	0.3828	0.3803	39D	0.3806	0.3725
		0.3806	0.3725		0.3784	0.3647
		0.3865	0.3762		0.3841	0.3682
		0.3890	0.3842		0.3865	0.3762
	40A	0.3804	0.3917	40B	0.3784	0.3841
		0.3784	0.3841		0.3765	0.3765
		0.3849	0.3881		0.3828	0.3803
		0.3871	0.3959		0.3849	0.3881
	40C	0.3765	0.3765	40D	0.3746	0.3689
		0.3746	0.3689		0.3727	0.3613
		0.3806	0.3725		0.3784	0.3647
		0.3828	0.3803		0.3806	0.3725
	41A	0.3736	0.3874	41B	0.3720	0.3800
		0.3720	0.3800		0.3703	0.3726
		0.3784	0.3841		0.3765	0.3765
		0.3804	0.3917		0.3784	0.3841
	41C	0.3703	0.3726	41D	0.3687	0.3652
		0.3687	0.3652		0.3670	0.3578
		0.3746	0.3689		0.3727	0.3613
		0.3765	0.3765		0.3746	0.3689


AUTOMOTIVE
BIN SELECTION

Interior / 5630/2835

4500K


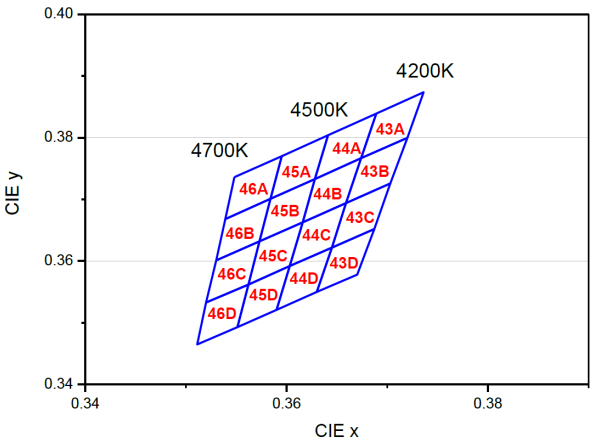


5000K

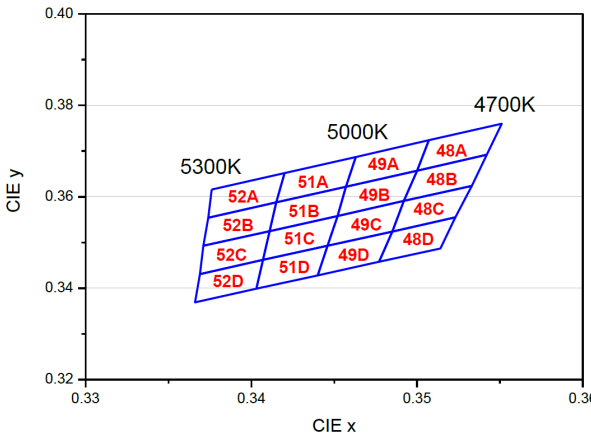

CCT	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
4500K	43A	0.3689	0.3839	43B	0.3674	0.3767
		0.3674	0.3767		0.3659	0.3694
		0.3720	0.3800		0.3703	0.3726
		0.3736	0.3874		0.3720	0.3800
	43C	0.3659	0.3694	43D	0.3645	0.3622
		0.3645	0.3622		0.3630	0.3550
		0.3687	0.3652		0.3670	0.3578
		0.3703	0.3726		0.3687	0.3652
	44A	0.3641	0.3804	44B	0.3628	0.3733
		0.3628	0.3733		0.3616	0.3663
		0.3674	0.3767		0.3659	0.3694
		0.3689	0.3839		0.3674	0.3767
	44C	0.3616	0.3663	44D	0.3603	0.3592
		0.3603	0.3592		0.3590	0.3521
		0.3645	0.3622		0.3630	0.3550
		0.3659	0.3694		0.3645	0.3622
	45A	0.3595	0.3770	45B	0.3584	0.3701
		0.3584	0.3701		0.3573	0.3632
		0.3628	0.3733		0.3616	0.3663
		0.3641	0.3804		0.3628	0.3733
	45C	0.3573	0.3632	45D	0.3562	0.3562
		0.3562	0.3562		0.3551	0.3493
		0.3603	0.3592		0.3590	0.3521
		0.3616	0.3663		0.3603	0.3592
	46A	0.3548	0.3736	46B	0.3539	0.3668
		0.3539	0.3668		0.3530	0.3601
		0.3584	0.3701		0.3573	0.3632
		0.3595	0.3770		0.3584	0.3701
	46C	0.3530	0.3601	46D	0.3520	0.3533
		0.3520	0.3533		0.3511	0.3465
		0.3562	0.3562		0.3551	0.3493
		0.3573	0.3632		0.3562	0.3562

CCT	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
5000K	48A	0.3507	0.3724	48B	0.3500	0.3657
		0.3500	0.3657		0.3492	0.3591
		0.3542	0.3692		0.3533	0.3624
		0.3551	0.3760		0.3542	0.3692
	48C	0.3492	0.3591	48D	0.3485	0.3524
		0.3485	0.3524		0.3477	0.3458
		0.3523	0.3555		0.3514	0.3487
		0.3533	0.3624		0.3523	0.3555
	49A	0.3463	0.3687	49B	0.3457	0.3622
		0.3457	0.3622		0.3452	0.3558
		0.3500	0.3657		0.3492	0.3591
		0.3507	0.3724		0.3500	0.3657
	49C	0.3452	0.3558	49D	0.3446	0.3493
		0.3446	0.3493		0.3440	0.3428
		0.3485	0.3524		0.3477	0.3458
		0.3492	0.3591		0.3485	0.3524
	51A	0.3420	0.3652	51B	0.3415	0.3588
		0.3415	0.3588		0.3411	0.3525
		0.3457	0.3622		0.3452	0.3558
		0.3463	0.3687		0.3457	0.3622
	51C	0.3411	0.3525	51D	0.3407	0.3462
		0.3407	0.3462		0.3403	0.3399
		0.3446	0.3493		0.3440	0.3428
		0.3452	0.3558		0.3446	0.3493
	52A	0.3376	0.3616	52B	0.3374	0.3554
		0.3374	0.3554		0.3371	0.3493
		0.3415	0.3588		0.3411	0.3525
		0.3420	0.3652		0.3415	0.3588
	52C	0.3371	0.3493	52D	0.3369	0.3431
		0.3369	0.3431		0.3366	0.3369
		0.3407	0.3462		0.3403	0.3399
		0.3411	0.3525		0.3407	0.3462

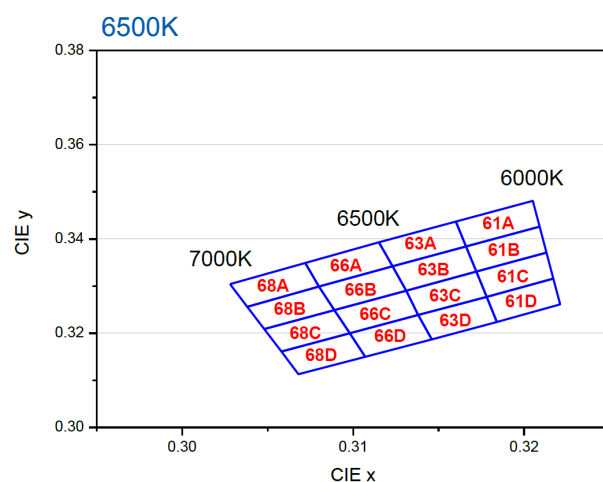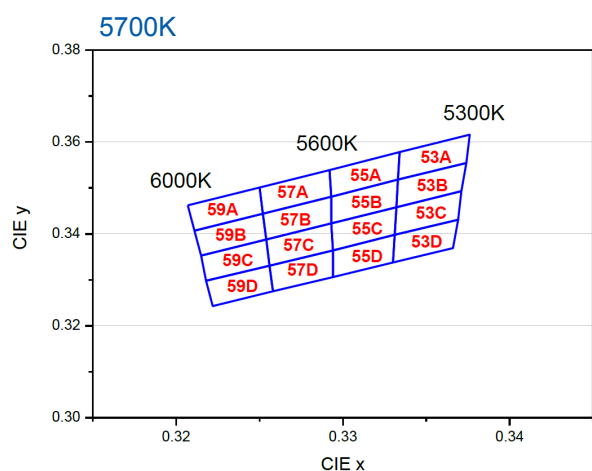


Bin Range of Chromaticity Coordinates Specifications

CCT	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
5700K	53A	0.3334	0.3578	53B	0.3333	0.3518
		0.3333	0.3518		0.3332	0.3458
		0.3374	0.3554		0.3371	0.3493
		0.3376	0.3616		0.3374	0.3554
	53C	0.3332	0.3458	53D	0.3331	0.3398
		0.3331	0.3398		0.3330	0.3338
		0.3369	0.3431		0.3366	0.3369
		0.3371	0.3493		0.3369	0.3431
	55A	0.3292	0.3539	55B	0.3293	0.3481
		0.3293	0.3481		0.3293	0.3423
		0.3333	0.3518		0.3332	0.3458
		0.3334	0.3578		0.3333	0.3518
	55C	0.3293	0.3423	55D	0.3294	0.3364
		0.3294	0.3364		0.3294	0.3306
		0.3331	0.3398		0.3330	0.3338
		0.3332	0.3458		0.3331	0.3398
	57A	0.3250	0.3501	57B	0.3252	0.3444
		0.3252	0.3444		0.3254	0.3388
		0.3293	0.3481		0.3293	0.3423
		0.3292	0.3539		0.3293	0.3481
	57C	0.3254	0.3388	57D	0.3256	0.3331
		0.3256	0.3331		0.3258	0.3275
		0.3294	0.3364		0.3294	0.3306
		0.3293	0.3423		0.3294	0.3364
	59A	0.3207	0.3462	59B	0.3211	0.3407
		0.3211	0.3407		0.3215	0.3353
		0.3252	0.3444		0.3254	0.3388
		0.3250	0.3501		0.3252	0.3444
	59C	0.3215	0.3353	59D	0.3218	0.3298
		0.3218	0.3298		0.3222	0.3243
		0.3256	0.3331		0.3258	0.3275
		0.3254	0.3388		0.3256	0.3331

CCT	Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
6500K	61A	0.3160	0.3437	61B	0.3166	0.3384
		0.3166	0.3384		0.3172	0.3331
		0.3209	0.3426		0.3213	0.3371
		0.3205	0.3481		0.3209	0.3426
	61C	0.3172	0.3331	61D	0.3178	0.3277
		0.3178	0.3277		0.3184	0.3224
		0.3217	0.3316		0.3221	0.3261
		0.3213	0.3371		0.3217	0.3316
	63A	0.3115	0.3393	63B	0.3123	0.3342
		0.3123	0.3342		0.3131	0.3290
		0.3166	0.3384		0.3172	0.3331
		0.3160	0.3437		0.3166	0.3384
	63C	0.3131	0.3290	63D	0.3138	0.3239
		0.3138	0.3239		0.3146	0.3187
		0.3178	0.3277		0.3184	0.3224
		0.3172	0.3331		0.3178	0.3277
	66A	0.3072	0.3349	66B	0.3080	0.3299
		0.3080	0.3299		0.3089	0.3249
		0.3123	0.3342		0.3131	0.3290
		0.3115	0.3393		0.3123	0.3342
	66C	0.3089	0.3249	66D	0.3098	0.3200
		0.3098	0.3200		0.3107	0.3150
		0.3138	0.3239		0.3146	0.3187
		0.3131	0.3290		0.3138	0.3239
	68A	0.3028	0.3304	68B	0.3038	0.3256
		0.3038	0.3256		0.3048	0.3209
		0.3080	0.3299		0.3089	0.3249
		0.3072	0.3349		0.3080	0.3299
	68C	0.3048	0.3209	68D	0.3058	0.3161
		0.3058	0.3161		0.3068	0.3113
		0.3098	0.3200		0.3107	0.3150
		0.3089	0.3249		0.3098	0.3200

AUTOMOTIVE
BIN SELECTION

Interior / Backlight

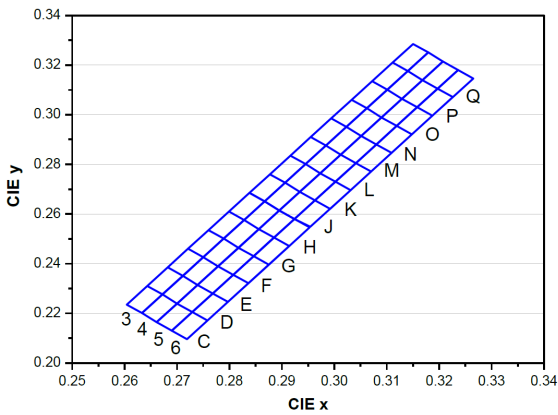

Bin Range of Chromaticity Coordinates Specifications

Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
Q3	0.3140	0.3176	J3	0.2867	0.2651
	0.3111	0.3210		0.2838	0.2685
	0.3150	0.3285		0.2877	0.2760
	0.3179	0.3251		0.2906	0.2726
P3	0.3101	0.3101	Q4	0.3168	0.3139
	0.3072	0.3135		0.3140	0.3176
	0.3111	0.3210		0.3179	0.3251
	0.3140	0.3176		0.3207	0.3214
O3	0.3062	0.3026	P4	0.3129	0.3064
	0.3033	0.3060		0.3101	0.3101
	0.3072	0.3135		0.3140	0.3176
	0.3101	0.3101		0.3168	0.3139
N3	0.3023	0.2951	O4	0.3090	0.2989
	0.2994	0.2985		0.3062	0.3026
	0.3033	0.3060		0.3101	0.3101
	0.3062	0.3026		0.3129	0.3064
M3	0.2984	0.2876	N4	0.3051	0.2914
	0.2955	0.2910		0.3023	0.2951
	0.2994	0.2985		0.3062	0.3026
	0.3023	0.2951		0.3090	0.2989
L3	0.2945	0.2801	M4	0.3012	0.2839
	0.2916	0.2835		0.2984	0.2876
	0.2955	0.2910		0.3023	0.2951
	0.2984	0.2876		0.3051	0.2914
K3	0.2906	0.2726	L4	0.2973	0.2764
	0.2877	0.2760		0.2945	0.2801
	0.2916	0.2835		0.2984	0.2876
	0.2945	0.2801		0.3012	0.2839

Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
K4	0.2934	0.2689	P6	0.3187	0.2996
	0.2906	0.2726		0.3158	0.3030
	0.2945	0.2801		0.3197	0.3105
	0.2973	0.2764		0.3226	0.3071
J4	0.2895	0.2614	O6	0.3148	0.2921
	0.2867	0.2651		0.3119	0.2955
	0.2906	0.2726		0.3158	0.3030
	0.2934	0.2689		0.3187	0.2996
Q5	0.3197	0.3105	N6	0.3109	0.2846
	0.3168	0.3139		0.3080	0.2880
	0.3207	0.3214		0.3119	0.2955
	0.3236	0.3180		0.3148	0.2921
P5	0.3158	0.3030	M6	0.3070	0.2771
	0.3129	0.3064		0.3041	0.2805
	0.3168	0.3139		0.3080	0.2880
	0.3197	0.3105		0.3109	0.2846
O5	0.3119	0.2955	L6	0.3031	0.2696
	0.3090	0.2989		0.3002	0.2730
	0.3129	0.3064		0.3041	0.2805
	0.3158	0.3030		0.3070	0.2771
N5	0.3080	0.2880	K6	0.2992	0.2621
	0.3051	0.2914		0.2963	0.2655
	0.3090	0.2989		0.3002	0.2730
	0.3119	0.2955		0.3031	0.2696
M5	0.3041	0.2805	J6	0.2953	0.2546
	0.3012	0.2839		0.2924	0.2580
	0.3051	0.2914		0.2963	0.2655
	0.3080	0.2880		0.2992	0.2621
L5	0.3002	0.2730	H3	0.2828	0.2576
	0.2973	0.2764		0.2799	0.2610
	0.3012	0.2839		0.2838	0.2685
	0.3041	0.2805		0.2867	0.2651
K5	0.2963	0.2655	G3	0.2789	0.2501
	0.2934	0.2689		0.2760	0.2535
	0.2973	0.2764		0.2799	0.2610
	0.3002	0.2730		0.2828	0.2576
J5	0.2924	0.2580	F3	0.2750	0.2426
	0.2895	0.2614		0.2721	0.2460
	0.2934	0.2689		0.2760	0.2535
	0.2963	0.2655		0.2789	0.2501
Q6	0.3226	0.3071	E3	0.2711	0.2351
	0.3197	0.3105		0.2682	0.2385
	0.3236	0.3180		0.2721	0.2460
	0.3265	0.3146		0.2750	0.2426

Bin Code	CIE X	CIE Y	Bin Code	CIE X	CIE Y
D3	0.2672	0.2276	E5	0.2768	0.2280
	0.2643	0.2310		0.2739	0.2314
	0.2682	0.2385		0.2778	0.2389
	0.2711	0.2351		0.2807	0.2355
C3	0.2633	0.2201	D5	0.2729	0.2205
	0.2604	0.2235		0.2700	0.2239
	0.2643	0.2310		0.2739	0.2314
	0.2672	0.2276		0.2768	0.2280
H4	0.2856	0.2539	C5	0.2690	0.2130
	0.2828	0.2576		0.2661	0.2164
	0.2867	0.2651		0.2700	0.2239
	0.2895	0.2614		0.2729	0.2205
G4	0.2817	0.2464	H6	0.2914	0.2471
	0.2789	0.2501		0.2885	0.2505
	0.2828	0.2576		0.2924	0.2580
	0.2856	0.2539		0.2953	0.2546
F4	0.2778	0.2389	G6	0.2875	0.2396
	0.2750	0.2426		0.2846	0.2430
	0.2789	0.2501		0.2885	0.2505
	0.2817	0.2464		0.2914	0.2471
E4	0.2739	0.2314	F6	0.2836	0.2321
	0.2711	0.2351		0.2807	0.2355
	0.2750	0.2426		0.2846	0.2430
	0.2778	0.2389		0.2875	0.2396
D4	0.2700	0.2239	E6	0.2797	0.2246
	0.2672	0.2276		0.2768	0.2280
	0.2711	0.2351		0.2807	0.2355
	0.2739	0.2314		0.2836	0.2321
C4	0.2661	0.2164	D6	0.2758	0.2171
	0.2633	0.2201		0.2729	0.2205
	0.2672	0.2276		0.2768	0.2280
	0.2700	0.2239		0.2797	0.2246
H5	0.2885	0.2505	C6	0.2719	0.2096
	0.2856	0.2539		0.2690	0.2130
	0.2895	0.2614		0.2729	0.2205
	0.2924	0.2580		0.2758	0.2171
G5	0.2846	0.2430			
	0.2817	0.2464			
	0.2856	0.2539			
	0.2885	0.2505			
F5	0.2807	0.2355			
	0.2778	0.2389			
	0.2817	0.2464			
	0.2846	0.2430			




VISIBLE LED

- 54** Lighting LED
- 73** Horticulture Lighting
- 75** UV
- 82** Flash LED
- 87** SMD LED
- 133** LED Lamps
- 150** LED Digital Displays
- 168** Signage LED
- 175** Automotive LED
- 194** Backlighting LED

Lighting | 2835(67-xxS)



UNIT : mm

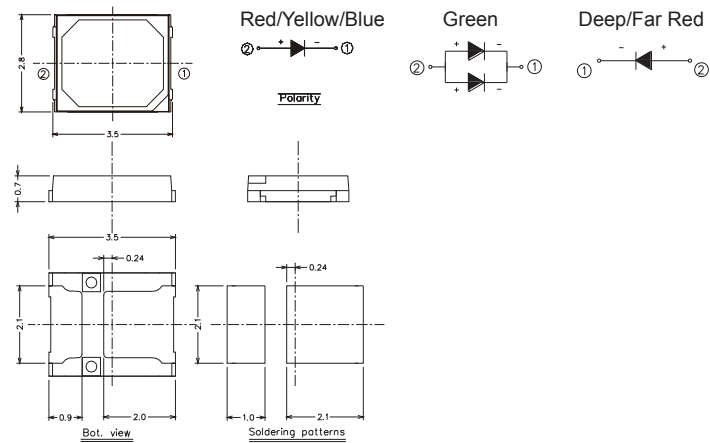


0.2W / 3V

Product	Dimension (mm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux(Min.)	Luminous Flux(Typ.)
67-21S/B3C-D4555D5D72936Z6/2T	2.8x3.5x0.7	2.9~3.6	60	Blue	445~455nm	2.5lm	3.25lm
G67-12S/G2C-D1525L4L82934Z6/2T	2.8x3.5x0.7	2.9~3.4	60	Green	515~525nm	13lm	15.5lm
67-21S/R2C-D2030B8L31926Z6/2T	2.8x3.5x0.7	1.9~2.6	60	Red	620~630nm	9lm	11lm
67-21S/Y2C-D8595B7L32128Z6/2T	2.8x3.5x0.7	2.1~2.8	60	Yellow	585~595nm	8.5lm	10.75lm
67-21S/NDR2C-P5080B2C12029Z6/2T	2.8x3.5x0.7	2.0~2.9	60	Deep Red	650~680nm	40mW	70mW
67-21S/NFR2C-P2050A3B21522Z6/2T	2.8x3.5x0.7	1.5~2.2	60	FarRed	720~750nm	15mW	32.5mW



UNIT : mm

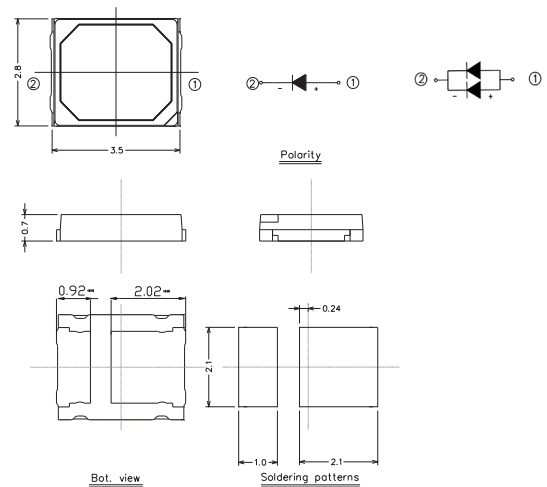


0.5W / 3V

Product	Dimension (mm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux(Min.)	Luminous Flux(Typ.)
67-21S/NB3C-D6575B8L52936Z15/2T	2.8x3.5x0.7	2.9~3.6	150	Blue	465~475nm	9lm	12lm
67-21S/NG3C-D2035N3PB2936Z15/2T	2.8x3.5x0.7	2.9~3.6	150	Green	520~535nm	24lm	34.5lm
G67-21S/R3C-D1530L6M41829Z15/2T	2.8x3.5x0.7	1.8~2.9	150	Red	615~630nm	15lm	19.5lm
67-21S/NY3C-D9000L2L81828Z15/2T	2.8x3.5x0.7	1.8~2.8	150	Yellow	590~600nm	11lm	19lm
67-21S/NDR3C-P5080C1C51827Z15/2T	2.8x3.5x0.7	1.8~2.7	150	Deep Red	650~680nm	80mW	130mW
67-22ST/NFR3C-P2050C1C41827Z15/2T	2.8x3.5x0.7	1.8~2.7	150	FarRed	720~750nm	80mW	130mW

Lighting I 2835(67-xxS)



UNIT : mm

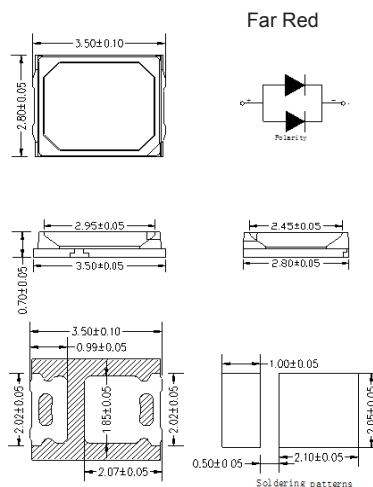


0.2W / 3V

Product	Dimension (mm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux(Min.)	Luminous Flux(Typ.)	CRI (Min)	Luminous Efficacy (lm/W)
67-22ST/KKE-5M273229Z6/2T	2.8x3.5x0.7	2.6~2.9	60	● Warm White	2700	32	33	80	165
67-22ST/KKE-5M303329Z6/2T	2.8x3.5x0.7	2.6~2.9	60	● Warm White	3000	33	34	80	170
67-22ST/KKE-5M353529Z6/2T	2.8x3.5x0.7	2.6~2.9	60	● Warm White	3500	35	36	80	180
67-22ST/KKE-5M403629Z6/2T	2.8x3.5x0.7	2.6~2.9	60	○ Neutral White	4000	36	37	80	185
67-22ST/KKE-5M503629Z6/2T	2.8x3.5x0.7	2.6~2.9	60	○ Cool White	5000	36	37	80	185
67-22ST/KKE-5M573629Z6/2T	2.8x3.5x0.7	2.6~2.9	60	○ Cool White	5700	36	37	80	185
67-22ST/KKE-5M653529Z6/2T	2.8x3.5x0.7	2.6~2.9	60	○ Cool White	6500	35	36	80	180



UNIT : mm

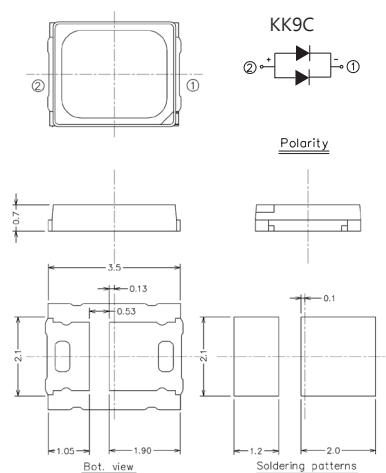


0.5W / 3V

Product	Dimension (mm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (Min.)	Luminous Efficacy (lm/W)
67-22ST/KKX-N277530Z15/2T	2.8x3.5x0.7	2.7~3.0	150	● Warm White	2700	75	79	80	192
67-22ST/KKX-N308030Z15/2T	2.8x3.5x0.7	2.7~3.0	150	● Warm White	3000	80	84	80	204
67-22ST/KKX-N358030Z15/2T	2.8x3.5x0.7	2.7~3.0	150	● Warm White	3500	80	84	80	204
67-22ST/KKX-N408530Z15/2T	2.8x3.5x0.7	2.7~3.0	150	○ Neutral White	4000	85	89	80	216
67-22ST/KKX-N508530Z15/2T	2.8x3.5x0.7	2.7~3.0	150	○ Cool White	5000	85	89	80	216
67-22ST/KKX-N578530Z15/2T	2.8x3.5x0.7	2.7~3.0	150	○ Cool White	5700	85	89	80	216

Lighting | 2835(67-xxS)



UNIT : mm

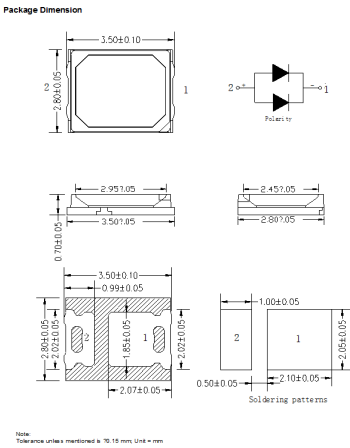


0.5W / 3V

Product	Dimension (mm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux(Min.)	Luminous Flux(Typ.)	CRI (Min)	Luminous Efficacy (lm/W)
67-22ST/KK9C-H278030Z15/2T(EMM)	2.8x3.5x0.7	2.7~3.0	150	● Warm White	2700	80	84	80	168
67-22ST/KK9C-H308530Z15/2T(EMM)	2.8x3.5x0.7	2.7~3.0	150	● Warm White	3000	85	89	80	178
67-22ST/KK9C-H358530Z15/2T(EMM)	2.8x3.5x0.7	2.7~3.0	150	● Warm White	3500	85	89	80	178
67-22ST/KK9C-H409030Z15/2T(EMM)	2.8x3.5x0.7	2.7~3.0	150	○ Neutral White	4000	90	94	80	188
67-22ST/KK9C-H509030Z15/2T(EMM)	2.8x3.5x0.7	2.7~3.0	150	○ Cool White	5000	90	94	80	188
67-22ST/KK9C-H579030Z15/2T(EMM)	2.8x3.5x0.7	2.7~3.0	150	○ Cool White	5700	90	94	80	188
67-22ST/KK9C-H658830Z15/2T(EMM)	2.8x3.5x0.7	2.7~3.0	150	○ Cool White	6500	88	92	80	184




UNIT : mm

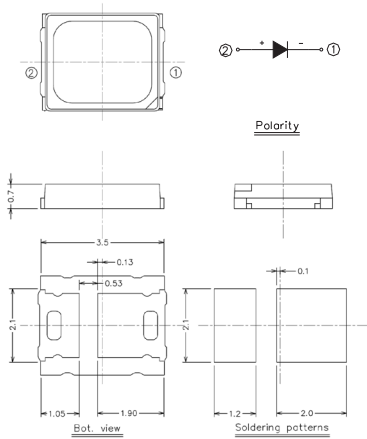


0.5W / 9V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-21ST/KK6C-H277096Z6/2T	2.8x3.5x0.7	8.7~9.6	60	● Warm White	2700	70	74	80	133
67-21ST/KK6C-H307396Z6/2T	2.8x3.5x0.7	8.7~9.6	60	● Warm White	3000	73	77	80	138
67-21ST/KK6C-H407696Z6/2T	2.8x3.5x0.7	8.7~9.6	60	○ Neutral White	4000	76	80	80	143
67-21ST/KK6C-H507696Z6/2T	2.8x3.5x0.7	8.7~9.6	60	○ Cool White	5000	76	80	80	143
67-21ST/KK6C-H577696Z6/2T	2.8x3.5x0.7	8.7~9.6	60	○ Cool White	5700	76	80	80	143
67-21ST/KK6C-H657696Z6/2T	2.8x3.5x0.7	8.7~9.6	60	○ Cool White	6500	76	80	80	143

Lighting | 2835(67-xxS)

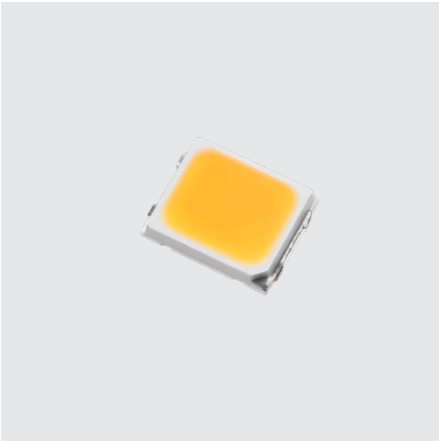

UNIT : mm

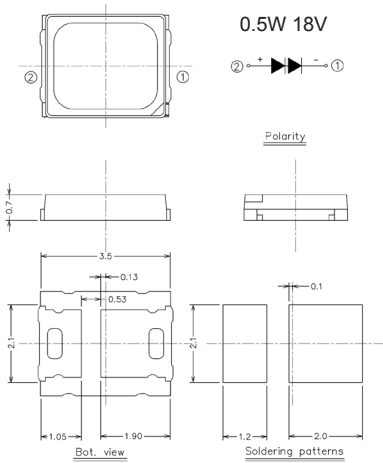


0.5W / 18V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-22ST/KKE-N2765200Z3/SZM/2T	2.8x3.5x0.7	17~19	30	● Warm White	2700	65	71	80	128
67-22ST/KKE-N3065200Z3/SZM/2T	2.8x3.5x0.7	17~19	30	● Warm White	3000	65	71	80	128
67-22ST/KKE-N4070200Z3/SZM/2T	2.8x3.5x0.7	17~19	30	○ Neutral White	4000	70	76	80	137
67-22ST/KKE-N5070200Z3/SZM/2T	2.8x3.5x0.7	17~19	30	○ Cool White	5000	70	76	80	137
67-22ST/KKE-N6570200Z3/SZM/2T	2.8x3.5x0.7	17~19	30	○ Cool White	6500	70	76	80	137

Lighting | 2835(67-xxS)



UNIT : mm

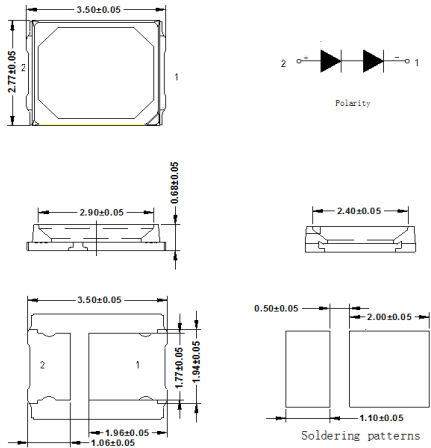


1W / 6V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-22ST/KK8C-5M2712068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	2700	120	124	80	124
67-22ST/KK8C-5M3012568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	3000	125	129	80	129
67-22ST/KK8C-5M3513068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	3500	130	134	80	134
67-22ST/KK8C-5M4013568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Neutral White	4000	135	139	80	139
67-22ST/KK8C-5M5013568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	5000	135	139	80	139
67-22ST/KK8C-5M5713568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	5700	135	139	80	139
67-22ST/KK8C-5M6013568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	6000	135	139	80	139
67-22ST/KK8C-5M6513068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	6500	130	134	80	134
67-22ST/KK8C-5M2712568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	2700	125	129	80	129
67-22ST/KK8C-5M3013068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	3000	130	134	80	134
67-22ST/KK8C-5M3513568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	3500	135	139	80	139
67-22ST/KK8C-5M4014068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Neutral White	4000	140	144	80	144
67-22ST/KK8C-5M5014068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	5000	140	144	80	144
67-22ST/KK8C-5M5714068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	5700	140	144	80	144
67-22ST/KK8C-5M6014068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	6000	140	144	80	144
67-22ST/KK8C-5M6513568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	6500	135	139	80	139
67-22ST/KK8C-5M2713068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	2700	130	134	80	134
67-22ST/KK8C-5M3013568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	3000	135	139	80	139
67-22ST/KK8C-5M3514068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	3500	140	144	80	144
67-22ST/KK8C-5M4014568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Neutral White	4000	145	149	80	149
67-22ST/KK8C-5M5014568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	5000	145	149	80	149
67-22ST/KK8C-5M5714568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	5700	145	149	80	149
67-22ST/KK8C-5M6014568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	6000	145	149	80	149
67-22ST/KK8C-5M6514068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	6500	140	144	80	144
67-22ST/KK8C-5M2714068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	2700	140	144	80	144
67-22ST/KK8C-5M3014568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	3000	145	149	80	149
67-22ST/KK8C-5M3515068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	● Warm White	3500	150	155	80	155
67-22ST/KK8C-5M4015568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Neutral White	4000	155	160	80	160
67-22ST/KK8C-5M5015568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	5000	155	160	80	160
67-22ST/KK8C-5M5715568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	5700	155	160	80	160
67-22ST/KK8C-5M6015568Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	6000	155	160	80	160
67-22ST/KK8C-5M6515068Z15/2T	2.8x3.5x0.7	5.8~6.8	150	○ Cool White	6500	150	155	80	155

Lighting | 2835(67-xxS)



UNIT : mm

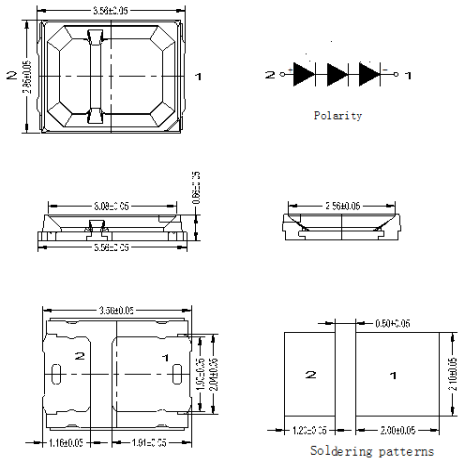


1W / 9V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-23ST/KKX-5M2714096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	2700	140	144	80	144
67-23ST/KKX-5M3014596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	3000	145	149	80	149
67-23ST/KKX-5M3515096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	3500	150	155	80	155
67-23ST/KKX-5M4015596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Neutral White	4000	155	160	80	160
67-23ST/KKX-5M5015596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	5000	155	160	80	160
67-23ST/KKX-5M5715596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	5700	155	160	80	160
67-23ST/KKX-5M6015596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	6000	155	160	80	160
67-23ST/KKX-5M6515096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	6500	150	155	80	155
67-23ST/KKX-5M2714596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	2700	145	149	80	149
67-23ST/KKX-5M3015096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	3000	150	155	80	155
67-23ST/KKX-5M3515596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	3500	155	160	80	160
67-23ST/KKX-5M4016096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Neutral White	4000	160	165	80	165
67-23ST/KKX-5M5016096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	5000	160	165	80	165
67-23ST/KKX-5M5716096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	5700	160	165	80	165
67-23ST/KKX-5M6016096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	6000	160	165	80	165
67-23ST/KKX-5M6515596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	6500	155	160	80	160
67-23ST/KKX-5M2715096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	2700	150	155	80	155
67-23ST/KKX-5M3015596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	3000	155	160	80	160
67-23ST/KKX-5M3516096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Warm White	3500	160	165	80	165
67-23ST/KKX-5M4016596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Neutral White	4000	165	170	80	170
67-23ST/KKX-5M5016596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	5000	165	170	80	170
67-23ST/KKX-5M5716596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	5700	165	170	80	170
67-23ST/KKX-5M6016596Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	6000	165	170	80	170
67-23ST/KKX-5M6516096Z10/2T	2.8x3.5x0.7	8.4~9.6	100	Cool White	6500	160	165	80	165

Lighting | 2835(67-xxS)




UNIT : mm

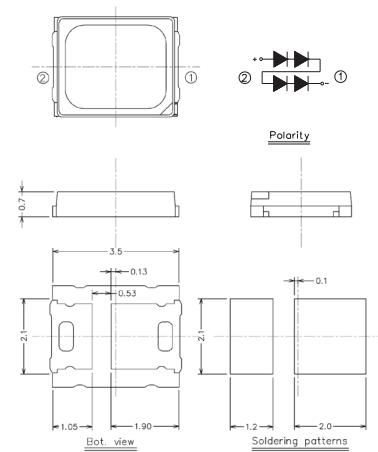


1W / 12V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-24ST/KKE-N27130130Z8/SZM/2T	2.8x3.5x0.7	11.0~13.0	80	Warm White	2700	130	136	80	142
67-24ST/KKE-N30135130Z8/SZM/2T	2.8x3.5x0.7	11.0~13.0	80	Warm White	3000	135	141	80	147
67-24ST/KKE-N35135130Z8/SZM/2T	2.8x3.5x0.7	11.0~13.0	80	Warm White	3500	135	141	80	147
67-24ST/KKE-N40140130Z8/SZM/2T	2.8x3.5x0.7	11.0~13.0	80	Neutral White	4000	140	146	80	152
67-24ST/KKE-N50140130Z8/SZM/2T	2.8x3.5x0.7	11.0~13.0	80	Cool White	5000	140	146	80	152
67-24ST/KKE-N65140130Z8/SZM/2T	2.8x3.5x0.7	11.0~13.0	80	Cool White	6500	140	146	80	152

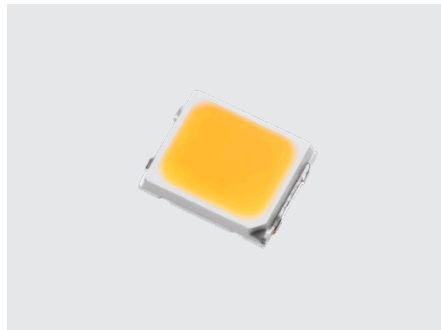

UNIT : mm

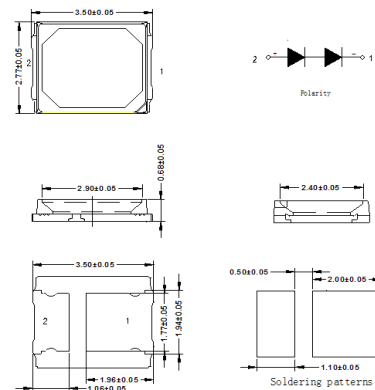


1W / 18V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-22ST/KKES-5M27118190Z5/2T	2.8x3.5x0.7	17~19	50	Warm White	2700	118	122	80	122
67-22ST/KKES-5M30123190Z5/2T	2.8x3.5x0.7	17~19	50	Warm White	3000	123	127	80	127
67-22ST/KKES-5M35128190Z5/2T	2.8x3.5x0.7	17~19	50	Warm White	3500	128	132	80	132
67-22ST/KKES-5M40133190Z5/2T	2.8x3.5x0.7	17~19	50	Neutral White	4000	133	137	80	137
67-22ST/KKES-5M50133190Z5/2T	2.8x3.5x0.7	17~19	50	Cool White	5000	133	137	80	137
67-22ST/KKES-5M57133190Z5/2T	2.8x3.5x0.7	17~19	50	Cool White	5700	133	137	80	137
67-22ST/KKES-5M60133190Z5/2T	2.8x3.5x0.7	17~19	50	Cool White	6000	133	137	80	137
67-22ST/KKES-5M65128190Z5/2T	2.8x3.5x0.7	17~19	50	Cool White	6500	128	132	80	132
67-22ST/KKES-5M27130190Z5/2T	2.8x3.5x0.7	17~19	50	Warm White	2700	130	134	80	134
67-22ST/KKES-5M30135190Z5/2T	2.8x3.5x0.7	17~19	50	Warm White	3000	135	139	80	139
67-22ST/KKES-5M35140190Z5/2T	2.8x3.5x0.7	17~19	50	Warm White	3500	140	144	80	144
67-22ST/KKES-5M40145190Z5/2T	2.8x3.5x0.7	17~19	50	Neutral White	4000	145	149	80	149
67-22ST/KKES-5M50145190Z5/2T	2.8x3.5x0.7	17~19	50	Cool White	5000	145	149	80	149
67-22ST/KKES-5M57145190Z5/2T	2.8x3.5x0.7	17~19	50	Cool White	5700	145	149	80	149
67-22ST/KKES-5M60145190Z5/2T	2.8x3.5x0.7	17~19	50	Cool White	6000	145	149	80	149
67-22ST/KKES-5M65140190Z5/2T	2.8x3.5x0.7	17~19	50	Cool White	6500	140	144	80	144

Lighting | 2835(67-xxS)



UNIT : mm

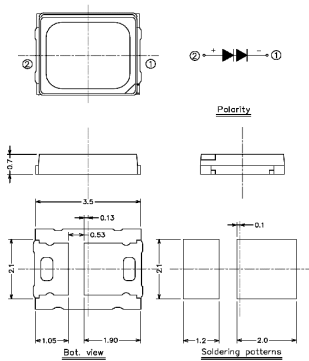


1W / 36V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-22ST/KKE-N27120380U2/SZM/2T	2.8x3.5x0.7	34~38	25	Warm White	2700	120	124	80	124
67-22ST/KKE-N30125380U2/SZM/2T	2.8x3.5x0.7	34~38	25	Warm White	3000	125	129	80	129
67-22ST/KKE-N40130380U2/SZM/2T	2.8x3.5x0.7	34~38	25	Neutral White	4000	130	134	80	134
67-22ST/KKE-N50130380U2/SZM/2T	2.8x3.5x0.7	34~38	25	Cool White	5000	130	134	80	134
67-22ST/KKE-N65130380U2/SZM/2T	2.8x3.5x0.7	34~38	25	Cool White	6500	130	134	80	134




UNIT : mm

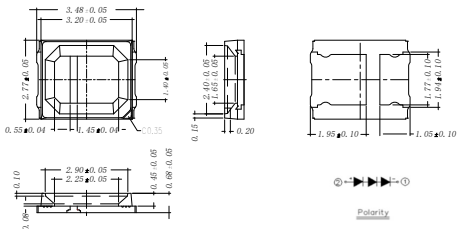


1W / 54V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-23ST/KKE-H27140550Z2/2T	2.8x3.5x0.7	50~55	17	Warm White	2700	140	144	80	144
67-23ST/KKE-H30145550Z2/2T	2.8x3.5x0.7	50~55	17	Warm White	3000	145	149	80	149
67-23ST/KKE-H35150550Z2/2T	2.8x3.5x0.7	50~55	17	Warm White	3500	150	155	80	155
67-23ST/KKE-H40155550Z2/2T	2.8x3.5x0.7	50~55	17	Neutral White	4000	155	160	80	160
67-23ST/KKE-H50155550Z2/2T	2.8x3.5x0.7	50~55	17	Cool White	5000	155	160	80	160
67-23ST/KKE-H57155550Z2/2T	2.8x3.5x0.7	50~55	17	Cool White	5700	155	160	80	160
67-23ST/KKE-H65155550Z2/2T	2.8x3.5x0.7	50~55	17	Cool White	6500	155	160	80	160

Lighting | 2835(67-xxS)

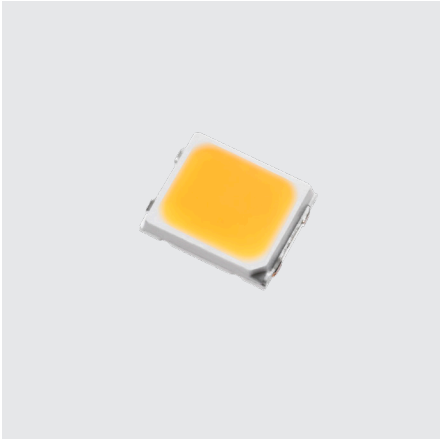

UNIT : mm

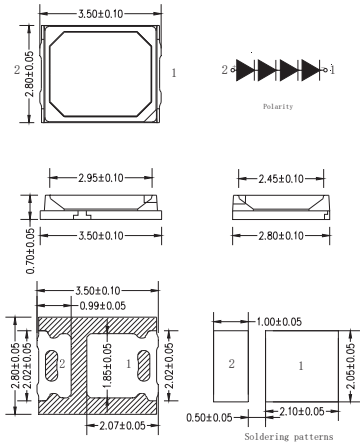


1W / 72V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
67-24ST/KKE-5M27160720U1/2T	2.8x3.5x0.7	66~72	15	● Warm White	2700	160	165	80	159
67-24ST/KKE-5M30165720U1/2T	2.8x3.5x0.7	66~72	15	● Warm White	3000	165	170	80	164
67-24ST/KKE-5M35170720U1/2T	2.8x3.5x0.7	66~72	15	● Warm White	3500	170	175	80	169
67-24ST/KKE-5M40175720U1/2T	2.8x3.5x0.7	66~72	15	○ Neutral White	4000	175	180	80	174
67-24ST/KKE-5M50175720U1/2T	2.8x3.5x0.7	66~72	15	○ Cool White	5000	175	185	80	179
67-24ST/KKE-5M57175720U1/2T	2.8x3.5x0.7	66~72	15	○ Cool White	5700	175	190	80	184
67-24ST/KKE-5M65175720U1/2T	2.8x3.5x0.7	66~72	15	○ Cool White	6500	175	190	80	184

Lighting ■ 3030(XI3030)

UNIT : mm

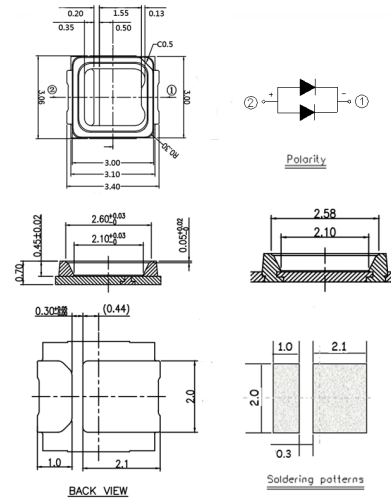


Lighting

0.2W / 3V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
XI3030P/KKX-5M303729U6/2T	3.0x3.4x0.7	2.6~2.9	65	● Warm White	3000	37	41	80	215
XI3030P/KKX-5M403929U6/2T	3.0x3.4x0.7	2.6~2.9	65	○ Neutral White	4000	39	42	80	225
XI3030P/KKX-5M503929U6/2T	3.0x3.4x0.7	2.6~2.9	65	○ Cool White	5000	39	42	80	225
XI3030P/KKX-5M573929U6/2T	3.0x3.4x0.7	2.6~2.9	65	○ Cool White	5700	39	42	80	225
XI3030P/KKX-5M653829U6/2T	3.0x3.4x0.7	2.6~2.9	65	○ Cool White	6500	38	41	80	220

UNIT : mm

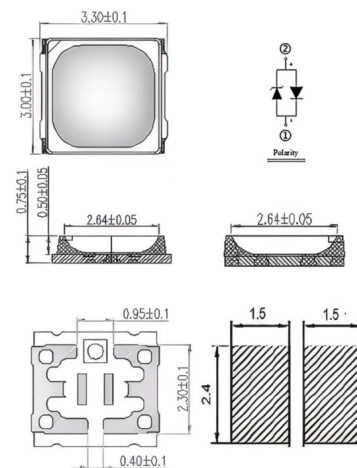


0.2W / 3V / Flip Chip

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
XI3030PF/KK8C-5M303828U6/2N	3.0x3.0x0.8	2.6~2.8	65	🟡 Warm White	3000	38	40	80	220
XI3030PF/KK8C-5M404028U6/2N	3.0x3.0x0.8	2.6~2.8	65	🟡 Neutral White	4000	40	42	80	230
XI3030PF/KK8C-5M504028U6/2N	3.0x3.0x0.8	2.6~2.8	65	🟡 Cool White	5000	40	42	80	230
XI3030PF/KK8C-5M653928U6/2N	3.0x3.0x0.8	2.6~2.8	65	🟡 Cool White	6500	39	41	80	227

Lighting ■ 3030(XI3030)



UNIT : mm

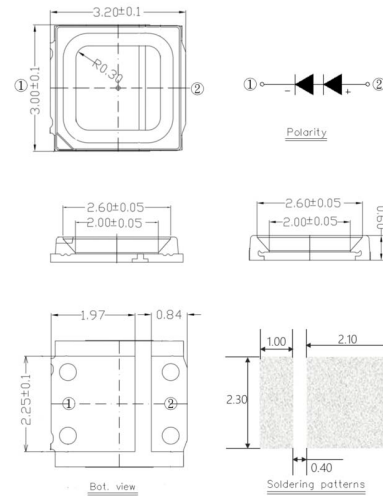


1W / 6V / CRI70

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
XI3030E/LKE-H2715068Z15/2T	3.0x3.2x0.9	5.4~6.8	150	● Warm White	2700	150	155	70	172
XI3030E/LKE-H3015568Z15/2T	3.0x3.2x0.9	5.4~6.8	150	● Warm White	3000	155	160	70	178
XI3030E/LKE-H3516068Z15/2T	3.0x3.2x0.9	5.4~6.8	150	● Warm White	3500	160	165	70	183
XI3030E/LKE-H4016568Z15/2T	3.0x3.2x0.9	5.4~6.8	150	○ Neutral White	4000	165	170	70	189
XI3030E/LKE-H5016568Z15/2T	3.0x3.2x0.9	5.4~6.8	150	○ Cool White	5000	165	170	70	189
XI3030E/LKE-H5716568Z15/2T	3.0x3.2x0.9	5.4~6.8	150	○ Cool White	5700	165	170	70	189
XI3030E/LKE-H6516068Z15/2T	3.0x3.2x0.9	5.4~6.8	150	○ Cool White	6500	160	165	70	183



UNIT : mm

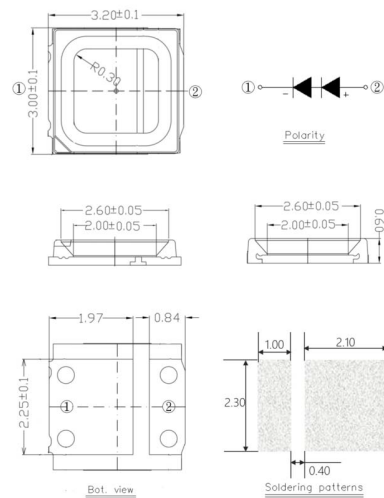


1W / 6V / CRI80

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
XI3030P/KK7C-H2713566Z15/2N	3.0x3.2x0.9	5.6~6.6	150	● Warm White	2700	133	139	80	148
XI3030P/KK7C-H3014066Z15/2N	3.0x3.2x0.9	5.6~6.6	150	● Warm White	3000	138	145	80	153
XI3030P/KK7C-H4014566Z15/2N	3.0x3.2x0.9	5.6~6.6	150	○ Neutral White	4000	143	150	80	158
XI3030P/KK7C-H5014566Z15/2N	3.0x3.2x0.9	5.6~6.6	150	○ Cool White	5000	143	150	80	158
XI3030P/KK7C-H5714566Z15/2N	3.0x3.2x0.9	5.6~6.6	150	○ Cool White	5700	143	150	80	158
XI3030P/KK7C-H6514566Z15/2N	3.0x3.2x0.9	5.6~6.6	150	○ Cool White	6500	143	150	80	158

Lighting | 3030(XI3030)



UNIT : mm

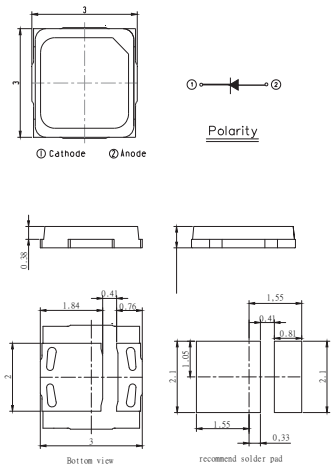


0.5W

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	Peak Wavelength (nm)	Min. Luminous Flux(lm) Radiometric Power(mW)
XI3030P/G3C-D1530P3R128371Z15/2N	3.0x3.0x0.63	2.8-3.7	150	● Green	515-530	33 lm
XI3030P/O3C-D0520N3PB15281Z15/2N	3.0x3.0x0.63	1.5-2.8	150	● Orange	605-620	24 lm
XI3030P/R3C-D1530L7N315281Z15/2N	3.0x3.0x0.63	1.5-2.8	150	● Red	615-630	16 lm
XI3030P/B3C-D5060T2T625312Z15/2N	3.0x3.0x0.63	2.5-3.1	150	● Royal Blue	450-460	190 mW
XI3030P/D3C-P4575S1S621271Z15/2N	3.0x3.0x0.63	2.1-2.7	150	● Deep Red	645-675	100 mW
XI3030P/F3C-P1545R5S115251Z15/2N	3.0x3.0x0.63	1.4-2.5	150	● Far Red	715-745	70 mW

Lighting | 4014(50-217S)



UNIT : mm

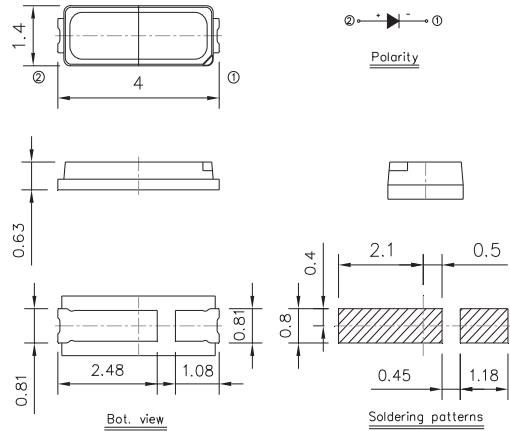


0.2W / 3V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
50-217S/KKE-B303032Z6/SZM/2T	4.0x1.4x0.63	2.7~3.2	60	● Warm White	3000	30	32	80	172
50-217S/KKE-B353032Z6/SZM/2T	4.0x1.4x0.63	2.7~3.2	60	● Warm White	3500	30	32	80	172
50-217S/KKE-B403232Z6/SZM/2T	4.0x1.4x0.63	2.7~3.2	60	○ Neutral White	4000	32	34	80	183
50-217S/KKE-B433232Z6/SZM/2T	4.0x1.4x0.63	2.7~3.2	60	○ Neutral White	4300	32	34	80	183
50-217S/KKE-B503232Z6/SZM/2T	4.0x1.4x0.63	2.7~3.2	60	○ Cool White	5000	32	34	80	183
50-217S/KKE-B633232Z6/SZM/2T	4.0x1.4x0.63	2.7~3.2	60	○ Cool White	6300	32	34	80	183
50-217S/KKE-B653232Z6/SZM/2T	4.0x1.4x0.63	2.7~3.2	60	○ Cool White	6500	32	34	80	183



UNIT : mm

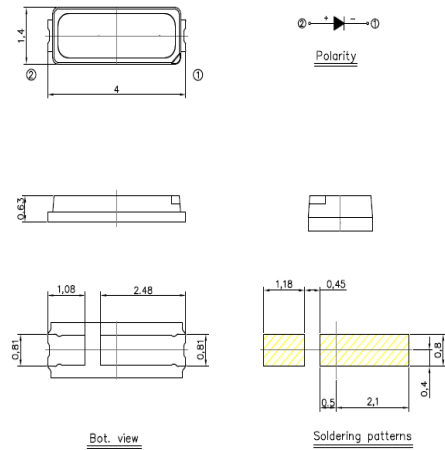


0.5W / 3V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
50-217ST/KK5C-H275534Z15/2T	4.0x1.4x0.63	2.8~3.4	150	● Warm White	2700K	55	57	80	127
50-217ST/KK5C-H306034Z15/2T	4.0x1.4x0.63	2.8~3.4	150	● Warm White	3000K	60	62	80	138
50-217ST/KK5C-H406534Z15/2T	4.0x1.4x0.63	2.8~3.4	150	○ Neutral White	4000K	65	67	80	149
50-217ST/KK5C-H506534Z15/2T	4.0x1.4x0.63	2.8~3.4	150	○ Cool White	5000K	65	67	80	149
50-217ST/KK5C-H576534Z15/2T	4.0x1.4x0.63	2.8~3.4	150	○ Cool White	5700K	65	67	80	149
50-217ST/KK5C-H656534Z15/2T	4.0x1.4x0.63	2.8~3.4	150	○ Cool White	6500K	65	67	80	149

Lighting | 5050(XI5050)



UNIT : mm

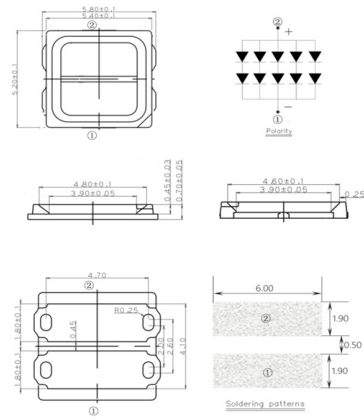


1W / 6V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
XI5050EE/LKE-H2720560Z18/2N	5.2x5.8x0.7	5.2~6.0	180	Warm White	2700	205	-	70	-
XI5050EE/LKE-H3021560Z18/2N	5.2x5.8x0.7	5.2~6.0	180	Warm White	3000	215	-	70	-
XI5050EE/LKE-H3522060Z18/2N	5.2x5.8x0.7	5.2~6.0	180	Warm White	3500	220	-	70	-
XI5050EE/LKE-H4023060Z18/2N	5.2x5.8x0.7	5.2~6.0	180	Neutral White	4000	230	-	70	-
XI5050EE/LKE-H5023060Z18/2N	5.2x5.8x0.7	5.2~6.0	180	Cool White	5000	230	-	70	-
XI5050EE/LKE-H5722560Z18/2N	5.2x5.8x0.7	5.2~6.0	180	Cool White	5700	225	-	70	-
XI5050EE/LKE-H6522560Z18/2N	5.2x5.8x0.7	5.2~6.0	180	Cool White	6500	225	-	70	-

Lighting ■ 5050(XI5050)



UNIT : mm

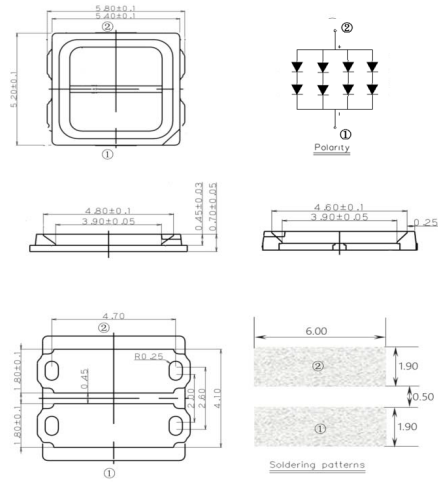


5W / 6V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
XI5050/LK5C-H4069072Z75/2N	5.3x5.8x0.7	6.0~7.2	750	○ Neutral White	4000	690	740	70	145
XI5050/LK5C-H5069072Z75/2N	5.3x5.8x0.7	6.0~7.2	750	○ Cool White	5000	690	740	70	145
XI5050/LK5C-H6569072Z75/2N	5.3x5.8x0.7	6.0~7.2	750	○ Cool White	6500	690	740	70	145



UNIT : mm

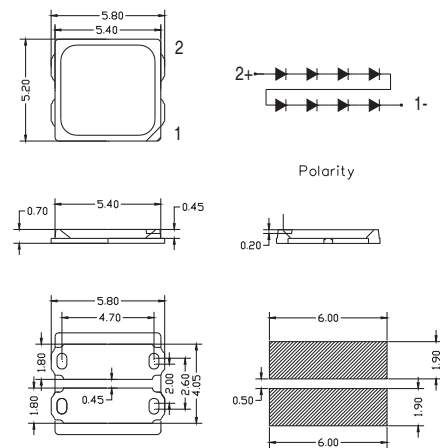


5W / 24V

Product	Size (LxWxHmm)	Forward Voltage (V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)	Luminous Efficacy (lm/W)
XI5050E/LKE-H27770260Z18/2N	5.2x5.8x0.7	22~26	200	● Warm White	2700	770	-	70	-
XI5050E/LKE-H30800260Z18/2N	5.2x5.8x0.7	22~26	200	● Warm White	3000	770	-	70	-
XI5050E/LKE-H35830260Z18/2N	5.2x5.8x0.7	22~26	200	● Warm White	3500	770	-	70	-
XI5050E/LKE-H40860260Z18/2N	5.2x5.8x0.7	22~26	200	○ Neutral White	4000	770	-	70	-
XI5050E/LKE-H50860260Z18/2N	5.2x5.8x0.7	22~26	200	○ Cool White	5000	770	-	70	-
XI5050E/LKE-H57860260Z18/2N	5.2x5.8x0.7	22~26	200	○ Cool White	5700	770	-	70	-
XI5050E/LKE-H65830260Z18/2N	5.2x5.8x0.7	22~26	200	○ Cool White	6500	770	-	70	-

Lighting | 3535



UNIT : mm

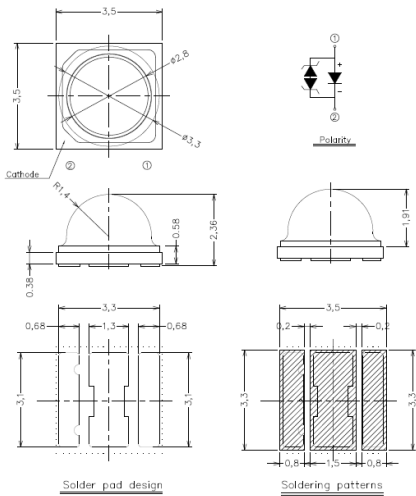

1W / 3V

Product	Size (LxWxHmm)	Forward Voltage(V)	Forward Current(mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)
ELSWF-JJ1C1-6FPGS-C6500	3.5x3.5x2.36	2.65~3.55	350	○ Cool White	6500	158	169	70
ELSWF-JJ1C1-6FPGS-C5700	3.5x3.5x2.36	2.65~3.55	350	○ Cool White	5700	158	169	70
ELSWF-JJ1C1-6FPGS-C5000	3.5x3.5x2.36	2.65~3.55	350	○ Cool White	5000	158	169	70
ELSWF-J71N1-6FPGS-C4000	3.5x3.5x2.36	2.65~3.55	350	○ Neutral White	4000	145	155	70
ELSWF-J61M1-6FPGS-C3500	3.5x3.5x2.36	2.65~3.55	350	● Warm White	3500	135	146	70
ELSWF-J61M1-6FPGS-C3000	3.5x3.5x2.36	2.65~3.55	350	● Warm White	3000	135	146	70
ELSWF-J61M1-6FPGS-C2700	3.5x3.5x2.36	2.65~3.55	350	● Warm White	2700	135	146	70

2W / 3V


Product	Size (LxWxHmm)	Forward Voltage(V)	Forward Current(mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)
ELSWF-JJ1C1-6FPGS-C6500	3.5x3.5x2.36	2.65~3.85	700	○ Cool White	6500	283	304	70
ELSWF-JJ1C1-6FPGS-C5700	3.5x3.5x2.36	2.65~3.85	700	○ Cool White	5700	283	304	70
ELSWF-JJ1C1-6FPGS-C5000	3.5x3.5x2.36	2.65~3.85	700	○ Cool White	5000	283	304	70
ELSWF-J71N1-6FPGS-C4000	3.5x3.5x2.36	2.65~3.85	700	○ Neutral White	4000	260	278	70
ELSWF-J61M1-6FPGS-C3500	3.5x3.5x2.36	2.65~3.85	700	● Warm White	3500	243	262	70
ELSWF-J61M1-6FPGS-C3000	3.5x3.5x2.36	2.65~3.85	700	● Warm White	3000	243	262	70
ELSWF-J61M1-6FPGS-C2700	3.5x3.5x2.36	2.65~3.85	700	● Warm White	2700	243	262	70

• Above spec is based on 85°C

Lighting | 3535




UNIT : mm

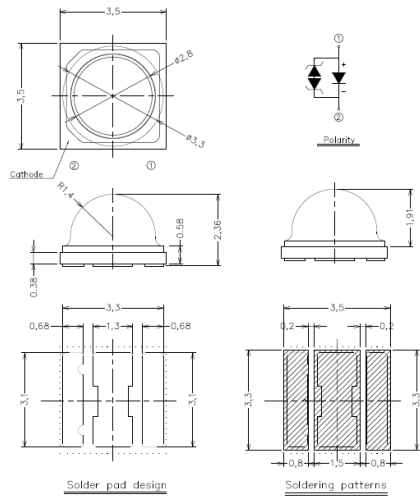


3W / 3V

Product	Size (LxWxHmm)	Forward Voltage(V)	Forward Current(mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)
ELSWF-JJ1C1-6FPGS-C6500	3.5x3.5x2.36	2.65~3.55	1000	○ Cool White	6500	378	406	70
ELSWF-JJ1C1-6FPGS-C5700	3.5x3.5x2.36	2.65~3.55	1000	○ Cool White	5700	378	406	70
ELSWF-JJ1C1-6FPGS-C5000	3.5x3.5x2.36	2.65~3.55	1000	○ Cool White	5000	378	406	70
ELSWF-J71N1-6FPGS-C4000	3.5x3.5x2.36	2.65~3.55	1000	○ Neutral White	4000	345	371	70
ELSWF-J61M1-6FPGS-C3500	3.5x3.5x2.36	2.65~3.55	1000	● Warm White	3500	323	348	70
ELSWF-J61M1-6FPGS-C3000	3.5x3.5x2.36	2.65~3.55	1000	● Warm White	3000	323	348	70
ELSWF-J61M1-6FPGS-C2700	3.5x3.5x2.36	2.65~3.55	1000	● Warm White	2700	323	348	70

• Above spec is based on 85°C

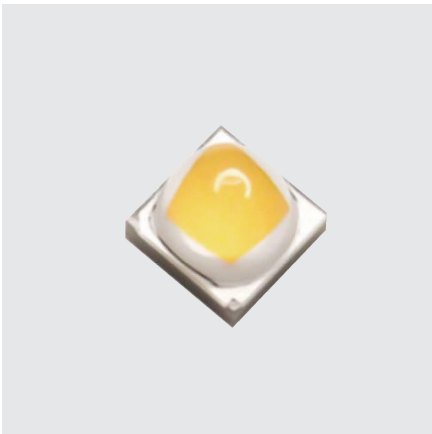

UNIT : mm

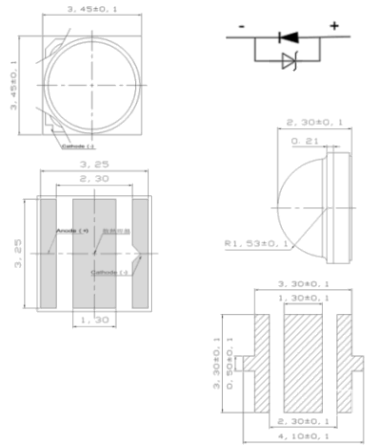


6W / 3V

Product	Size (LxWxHmm)	Forward Voltage(V)	Forward Current(mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux (Typ.)	CRI (min.)
HPL3535CZ12-LW65180X33350-1T	3.45x3.45x2.3	2.65~3.55	2000	○ Cool White	6500	180	201	70
HPL3535CZ12-LW57180X33350-1T	3.45x3.45x2.3	2.65~3.55	2000	○ Cool White	5700	180	201	70
HPL3535CZ12-LW50180X33350-1T	3.45x3.45x2.3	2.65~3.55	2000	○ Cool White	5000	180	201	70
HPL3535CZ12-LW40175X33350-1T	3.45x3.45x2.3	2.65~3.55	2000	○ Neutral White	4000	175	195	70
HPL3535CZ12-LW30170X33350-1T	3.45x3.45x2.3	2.65~3.55	2000	● Warm White	3500	170	170	70

Lighting I 3020



UNIT : mm

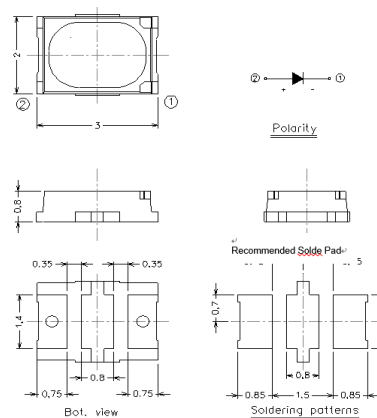


0.2W / 3V

Product	Size (LxWxHmm)	Forward Voltage(V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	CRI (min.)	Luminous Efficacy (lm/W)
45-21S/KK2C-H2727L7M4B2Z6/2T	3.0x2.0x0.8	2.9~3.6	60	● Warm White	2700	16	80	80
45-21S/KK2C-H3030L8M4B2Z6/2T	3.0x2.0x0.8	2.9~3.6	60	● Warm White	3000	17	80	80
45-21S/KK2C-H3535L8M4B2Z6/2T	3.0x2.0x0.8	2.9~3.6	60	● Warm White	3500	17	80	80
45-21S/KK2C-H4040L9N3B2Z6/2T	3.0x2.0x0.8	2.9~3.6	60	○ Neutral White	4000	18	80	80
45-21S/KK2C-H5050L9N3B2Z6/2T	3.0x2.0x0.8	2.9~3.6	60	○ Cool White	5000	18	80	80
45-21S/KK2C-H5757L9N3B2Z6/2T	3.0x2.0x0.8	2.9~3.6	60	○ Cool White	5700	18	80	80
45-21S/KK2C-H6565L9N3B2Z6/2T	3.0x2.0x0.8	2.9~3.6	60	○ Cool White	6500	18	80	80



UNIT : mm

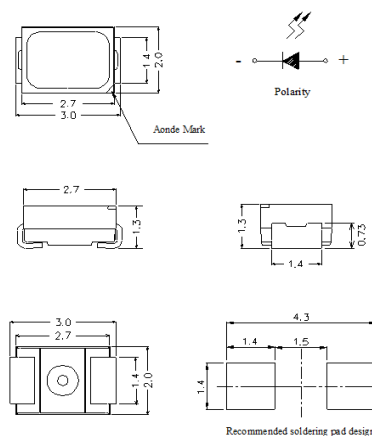


0.1W / 3V

Product	Size (LxWxHmm)	Forward Voltage(V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)
45-21/YSC-AU1V1C/2T-AFM	3.0x2.0x1.3	1.95~2.55	20	● Yellow	585.5~594.5 nm	450mcd
45-21/RSC-AU1V1B/2T-AFM	3.0x2.0x1.3	1.75~2.35	20	● Red	617.5~633.5nm	451mcd
45-11/B7C-FS2U1B14/2T-AFM	3.0x2.0x1.3	2.70~3.50	20	● Blue	464~472 nm	225mcd

Lighting | RGBW




UNIT : mm

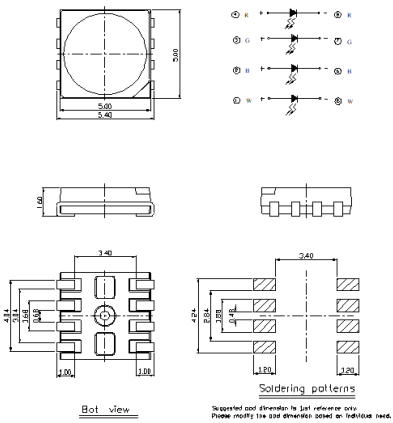


0.3W / 3V

Product	Size (LxWxHmm)	Forward Voltage(V)	Forward Current (mA)	Color	CCT (K)	Luminous Flux (Min.)	Luminous Flux(Typ.)
5050/RGBWD-A100/ET	5.4x5.0x1.6	2.1~2.6	100	Red	619~629nm	3550mcd	5000mcd
	5.4x5.0x1.6	3.0~3.8	100	Green	520~535nm	7100mcd	11000mcd
	5.4x5.0x1.6	3.1~3.8	100	Blue	460~475nm	1800mcd	3000mcd
	5.4x5.0x1.6	2.9~3.6	100	Cool White	5700	5600mcd	10000mcd

Horticulture Lighting | Ceramics

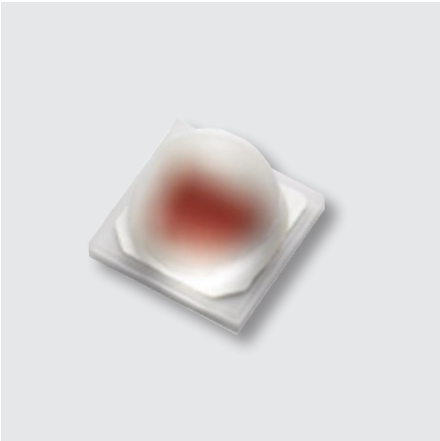


UNIT : mm

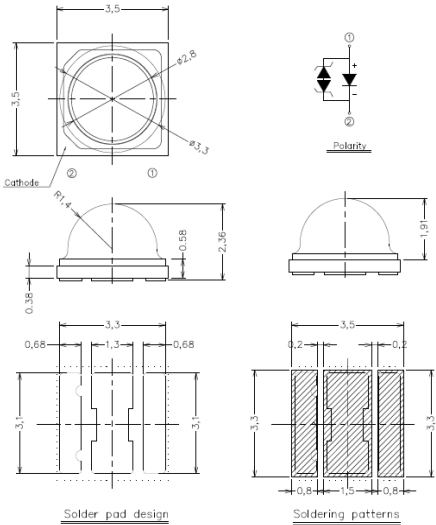


3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	Forward Current (mA)	View Angle	Color	Peak Wavelength (nm)	Radiometric Power (mW) Typ.	PPF (umol/s)	PPE (umol/J)
ELSW-Q91E1-0LPNM-AD3D8	3.5x3.5x2.03	1	1.75~2.95	350	120°	● Deep Red	645~675	275	1.51	2.1
ELSW-R21E1-0EPNM-AD3D8(OR)	3.5x3.5x2.03	1	1.75~2.35	350	120°	● Deep Red	645~675	460	2.53	3.21
ELSWF-R61L1-6FPNM-CB4B6	3.5x3.5x2.03	1	2.65~3.85	350	120°	● Royal Blue	445~460	600	2.47	2.20

• Above spec is based on 85°C

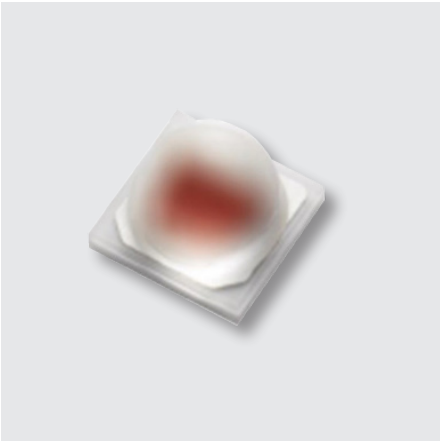

UNIT : mm

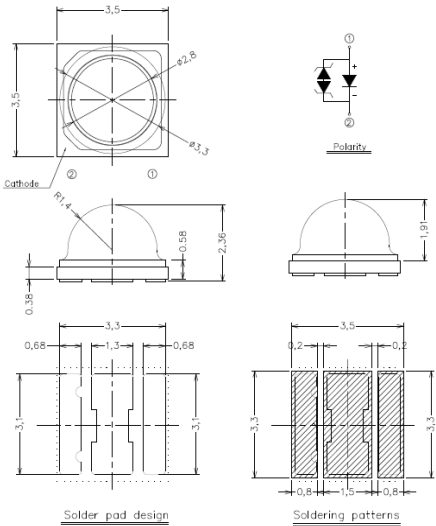

3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	Forward Current (mA)	View Angle	Color	Peak Wavelength (nm)	Radiometric Power (mW) Typ.	PPF (umol/s)	PPE (umol/J)
HPND3535CZ0112-NDR55651K0X24700-4H(EU)	3.5x3.5x2.36	2	1.75~2.35	700	120°	● Deep Red	655~665	1070	5.83	3.87


Horticulture Lighting | Ceramics



UNIT : mm

ELSWF

ELSWNS

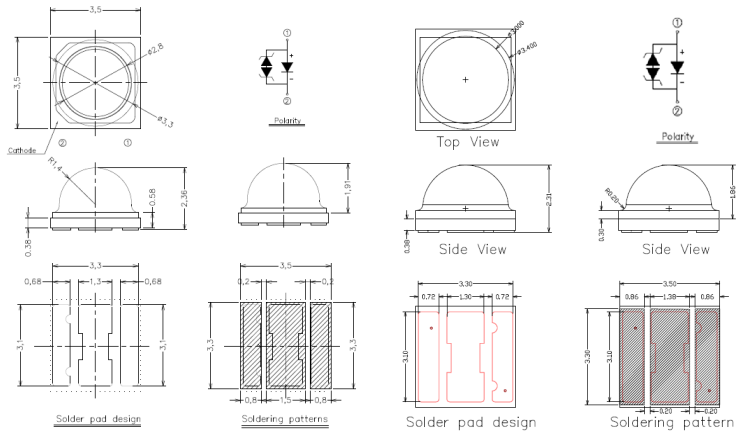


3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	Forward Current (mA)	View Angle	Color	Peak Wavelength (nm)	Radiometric Power (mW) Typ.	PPF (umol/s)	PPE (umol/J)
ELSWF-S41L2-6FPNM-DB4B6	35x35x23.6	2	3.25	700	120°	● Royal Blue	445~460	1500	5.28	2.51
ELSWNS-S11E2-6VPNM-AD308	35x35x23.1	2	2.22	700	120°	● Deep Red	645~675	1070	5.98	3.85

UV I UVA




UNIT : mm

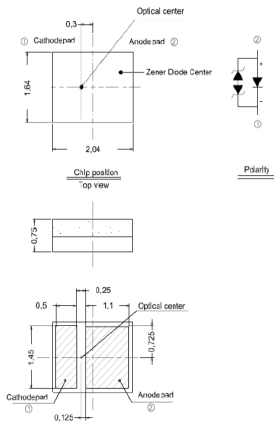


2016

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
ELUA2016OGB-P6070Q43040020-VA1M	2.04x1.64x0.75	0.08	3.0~4.0	120°	20	360~370	20
ELUA2016OGB-P8090Q53040020-VA1M	2.04x1.64x0.75	0.08	3.0~4.0	120°	20	380~390	25
ELUA2016OGB-P9000Q53040020-VA1M	2.04x1.64x0.75	0.08	3.0~4.0	120°	20	390~400	25
ELUA2016OGB-P0010Q53040020-VA1M	2.04x1.64x0.75	0.08	3.0~4.0	120°	20	400~410	25
ELUA2016OGB-P6070R13040060-V21M	2.04x1.64x0.75	0.2	3.0~4.0	120°	60	360~370	70
ELUA2016OGB-P8090R43040060-V21M	2.04x1.64x0.75	0.2	3.0~4.0	120°	60	380~390	70
ELUA2016OGB-P9000R53040060-V21M	2.04x1.64x0.75	0.2	3.0~4.0	120°	60	390~400	70
ELUA2016OGB-P0010R53040060-V21M	2.04x1.64x0.75	0.2	3.0~4.0	120°	60	400~410	65
ELUA2016OGB-P6070T53240500-VD1M	2.04x1.64x0.75	1.8	3.2~4.0	120°	500	360~370	500
ELUA2016OGB-P8090T73240500-VD1M	2.04x1.64x0.75	1.8	3.2~4.0	120°	500	380~390	600
ELUA2016OGB-P9000T73240500-VD1M	2.04x1.64x0.75	1.8	3.2~4.0	120°	500	390~400	600
ELUA2016OGB-P0010T73240500-VD1M	2.04x1.64x0.75	1.8	3.2~4.0	120°	500	400~410	600

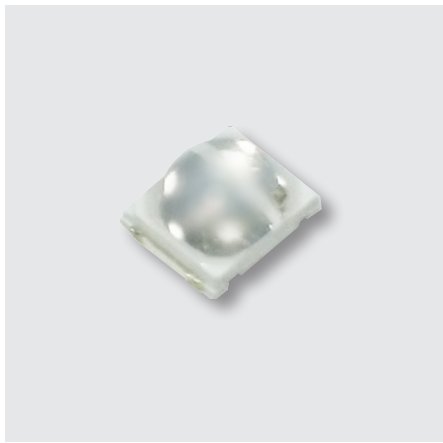


UNIT : mm

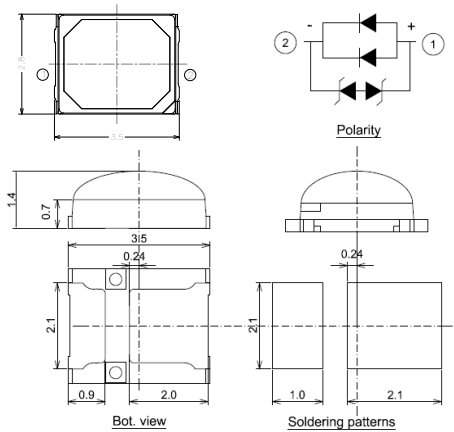


2835

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
ELUA2835TG0-P0010S83040200-V22D	2.8x3.5x1.4	-	3.0~4.0	100°	200	403~408	350
ELUA2835TG0-P1020S83040200-V22D	2.8x3.5x1.4	-	3.0~4.0	100°	200	413~418	350

UV I UVA

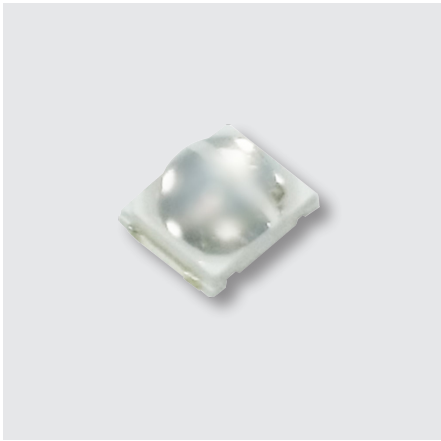


UNIT : mm

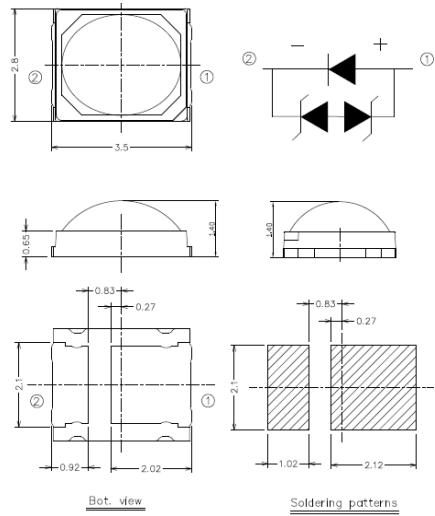


2835

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
ELUA2835TG0-P6070R53040060-VA1D	2.8x3.4x1.4	0.2	3.0~4.0	100°	60	360~370	90
ELUA2835TG0-P8090R53040060-VA1D	2.8x3.4x1.4	0.2	3.0~4.0	100°	60	380~390	90
ELUA2835TG0-P9000R53040060-VA1D	2.8x3.4x1.4	0.2	3.0~4.0	100°	60	390~400	90
ELUA2835TG0-P0010R53040060-VA1D	2.8x3.4x1.4	0.2	3.0~4.0	100°	60	400~410	90
ELUA2835TG0-P6070SC13040150-VA1D	2.8x3.4x1.4	0.5	3.0~4.0	100°	150	360~370	230

UV

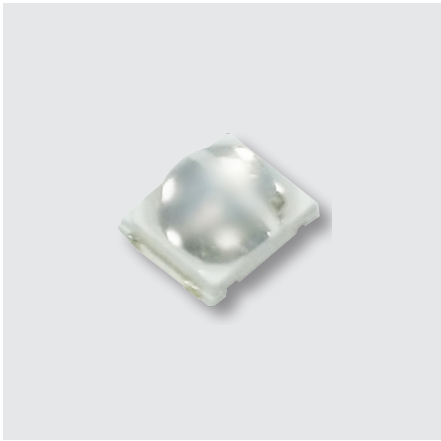

UNIT : mm

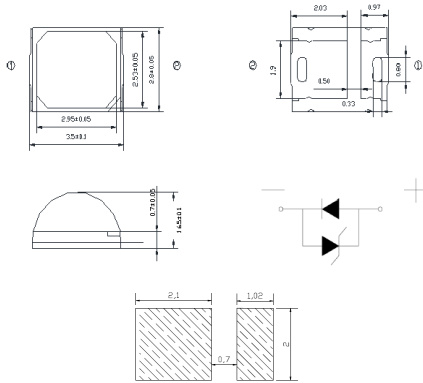


2835

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
UVA2835TZ0112-PUA6570120X38060-2T	2.8x3.5x1.65	0.2	3.2~3.8	120°	60	365~370	90

UV I UVA




UNIT : mm

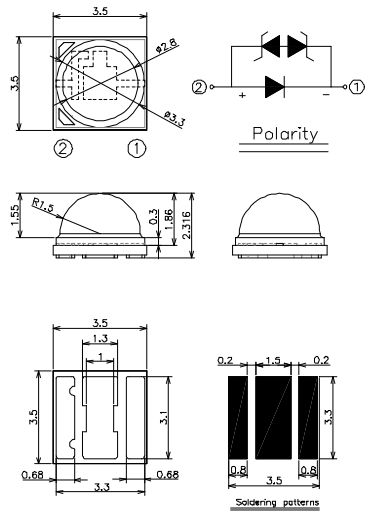


3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Min.
ELUA3535OGB-P6070U23240500-VD1M	3.5x3.5x2.35	1.8	3.5	120°	500	360~370	1000
ELUA3535OGB-P8090U23240500-VD1M	3.5x3.5x2.35	1.8	3.5	120°	500	380~390	1000
ELUA3535OGB-P9000U23240500-VD1M	3.5x3.5x2.35	1.8	3.5	120°	500	390~400	1000
ELUA3535OGB-P0010U23240500-VD1M	3.5x3.5x2.35	1.8	3.5	120°	500	400~410	1000

UV

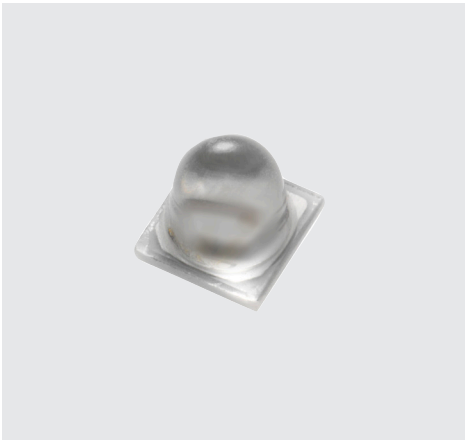


UNIT : mm

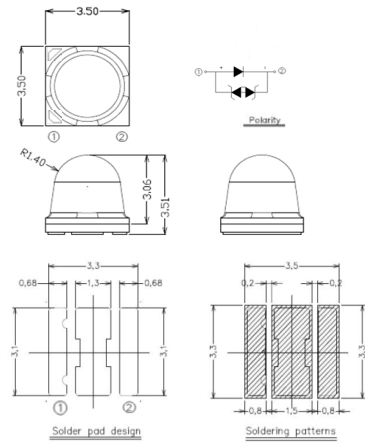


3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Min.
ELUA3535OG5-P6070U13240500-VD1M	3.5x3.5x3.51	4	3.2~4.0	50°	500	360~370	900
ELUA3535OG5-P8090U23240500-VD1M	3.5x3.5x3.51	4	3.2~4.0	50°	500	380~390	1000
ELUA3535OG5-P9000U23240500-VD1M	3.5x3.5x3.51	4	3.2~4.0	50°	500	390~400	1000
ELUA3535OG5-P0010U23240500-VD1M	3.5x3.5x3.51	4	3.2~4.0	50°	500	400~410	1000

UV I UVA

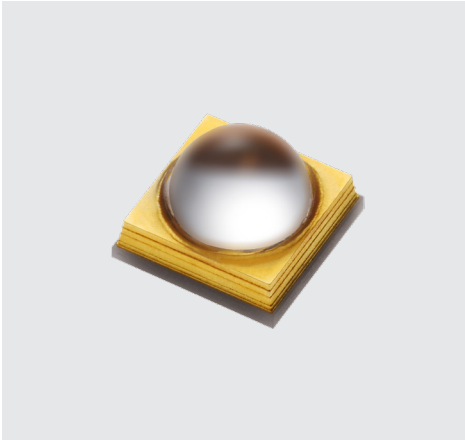


UNIT : mm

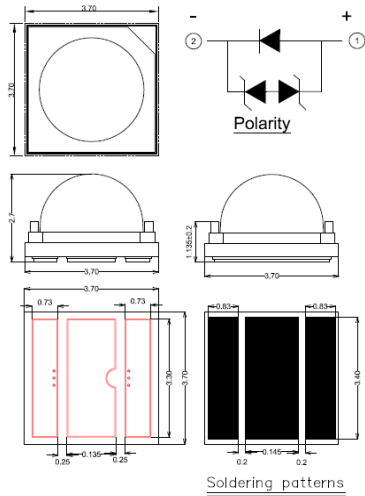


3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Min.
ELUA3535NU6-P6070U23648700-V41G	3.75x3.75x2.6	4	4	60°	700	360~370	900
ELUA3535NU6-P8090U5136481K0-V41G	3.75x3.75x2.6	4	4	60°	1000	380~390	1350
ELUA3535NU6-P9000U5136481K0-V41G	3.75x3.75x2.6	4	4	60°	1000	390~400	1350
ELUA3535NU6-P0010U5136481K0-V41G	3.75x3.75x2.6	4	4	60°	1000	400~410	1350

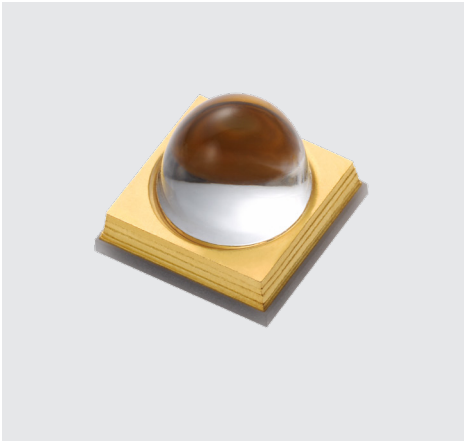


UNIT : mm

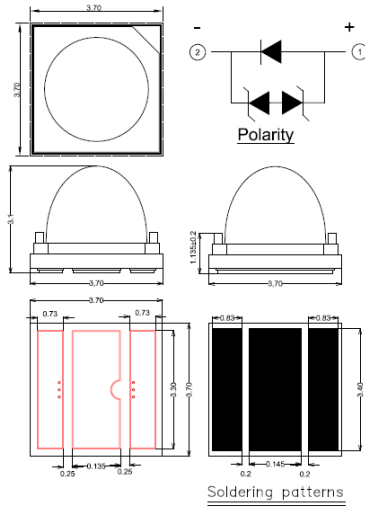


3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Min.
ELUA3535NU3-P6070U23648700-V41G	3.75x3.75x3.2	4	4	30°	700	360~370	900
ELUA3535NU3-P8090U736481K0-V41G	3.75x3.75x3.2	4	4	30°	1000	380~390	1350
ELUA3535NU3-P9000U736481K0-V41G	3.75x3.75x3.2	4	4	30°	1000	390~400	1350
ELUA3535NU3-P0010U736481K0-V41G	3.75x3.75x3.2	4	4	30°	1000	400~410	1350

UV I UVB

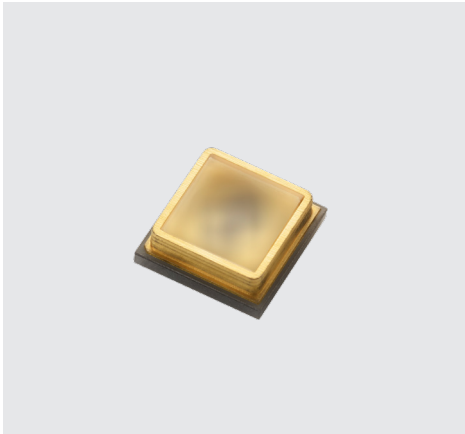


UNIT : mm




UVB 3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
UVB3535CZ0112-FUB0015001X75020-1T	3.5x3.5x1.3	0.1	5~7.5	120°	20	300-315	2

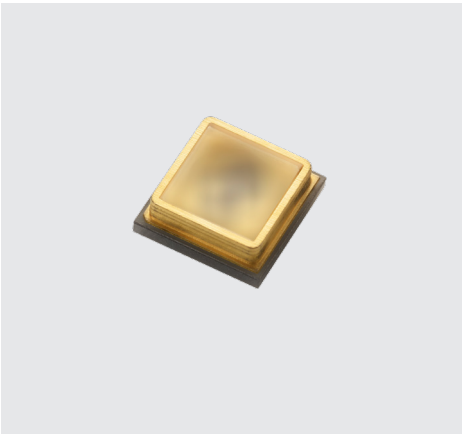


UNIT : mm

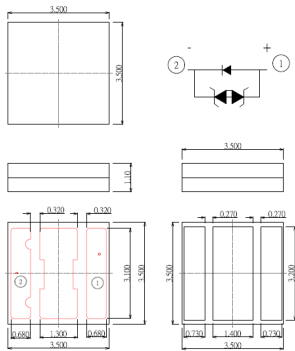


UVB 3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
UVB3535CZ0115- HUB0015006X75100-2T	3.5x3.5x1.3	0.7	5.5~7.5	150°	100	300-310	18

UV I UVC

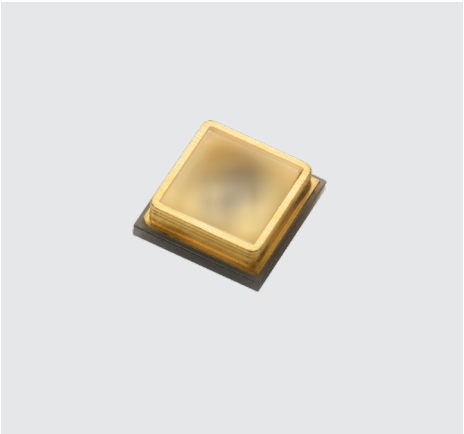


UNIT : mm

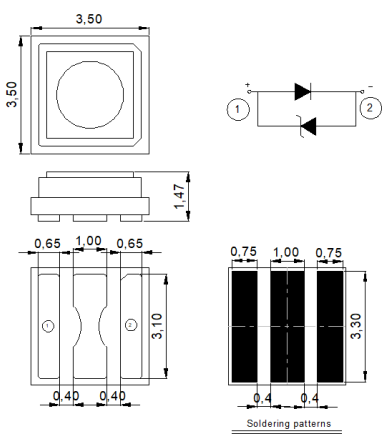


3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
ELUC3535NUB-P7085Q05075020-S21Q	3.5x3.5x1.3	0.13	5~7.5	120°	20	270-285	2

UV I UVC

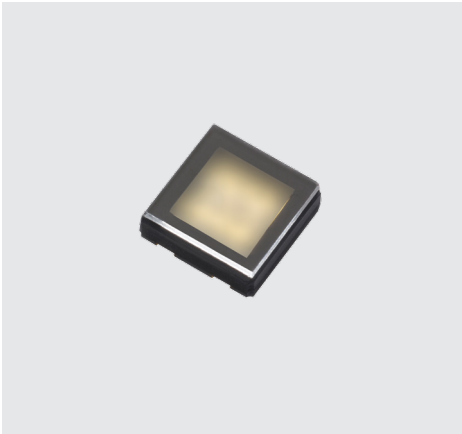

UNIT : mm

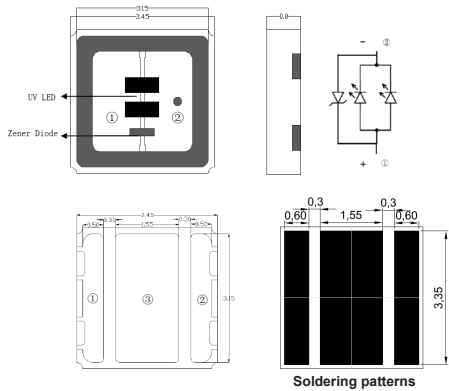


3535

Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
ELUC3535NUB-P7085Q15070100-S22Q	3.45x3.45x1.1	0.7	5~7	120°	100	270-285	10



UNIT : mm

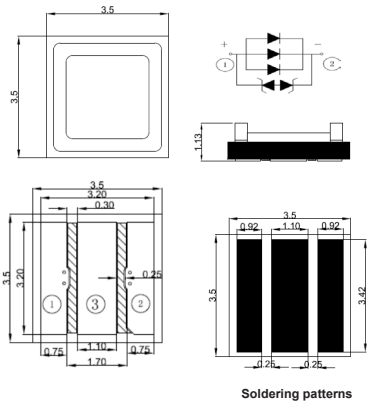


3535


Product	Dimension (mm)	Power (W)	Forward Voltage (V)	View Angle	Forward Current (mA)	Peak Wavelength (nm)	Radiant Flux(mW) Typ.
ELUC3535NUB-P7085Q47090300-F23D	3.5x3.5x1.13	2.4	7~9	120°	300	270-285	25

UV

Flash LED | 2016 series | Ceramic

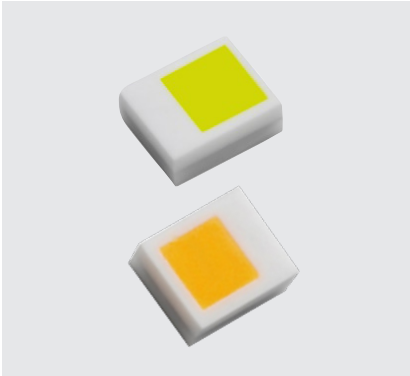


UNIT : mm

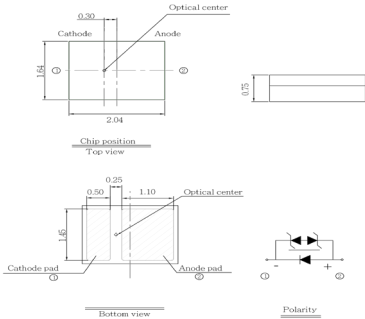

Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FC2016GF13MP	2.04x1.64x0.75	○ White	5000~6000	330	2.85~3.80	1000	-
FC2016GF13MP	2.04x1.64x0.75	○ White	4000~5000	400	2.85~3.80	1000	-
	2.04x1.64x0.75	○ White	5000~6000	380	2.85~3.80	1000	>80



UNIT : mm

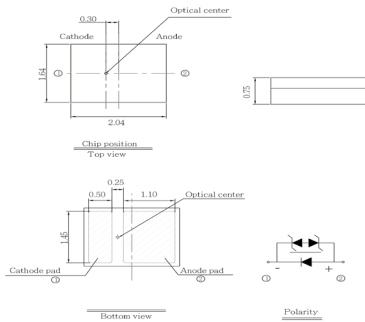


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FC2016GF13HP	2.04x1.64x0.75	○ White	5000~6000	300	2.85~3.80	1000	-
FC2016GF13HP	2.04x1.64x0.75	○ White	4500~6000	400	2.85~3.80	1000	-
	2.04x1.64x0.75	○ White	5000~6000	320	2.85~3.80	1000	>80

Flash LED | 1610 series | Ceramic



UNIT : mm

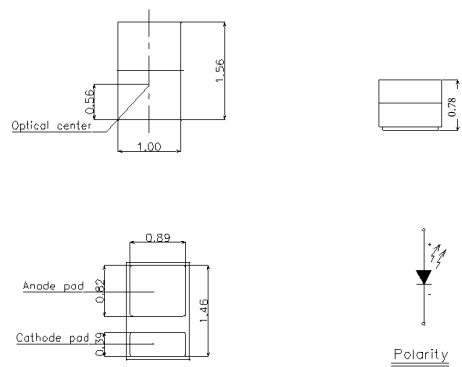


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FC1610HF13HP	1.56x1.0x0.81	○ White	5000~6000	270	2.85~3.80	1000	-

Flash LED | 1414 series | Ceramic



UNIT : mm

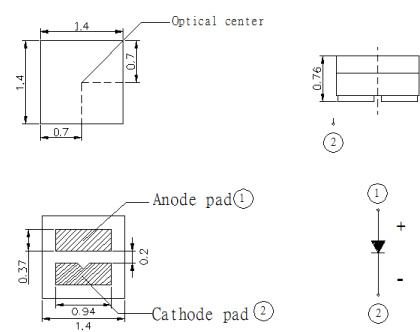


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FC1414G	1.40x1.40x0.76	○ White	2000~3000	270	2.85~3.80	1000	-
	1.40x1.40x0.76	○ White	5000~6000	250	2.85~3.80	1000	-

Flash LED

Flash LED | 1919series | EMC




UNIT : mm

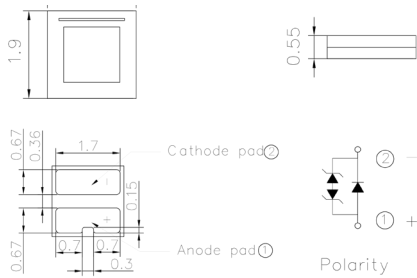


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FE1919EF14ZP	1.9x1.9x0.55	○White	4000~6000	550	3.00~4.00	1500	-
	1.9x1.9x0.55	○White	4000~5000	450	3.00~4.00	1500	80
FE1919EF162P	1.9x1.9x0.55	○White	4000~5000	670	3.00~4.00	1500	-

Flash LED | 1111series | CSP

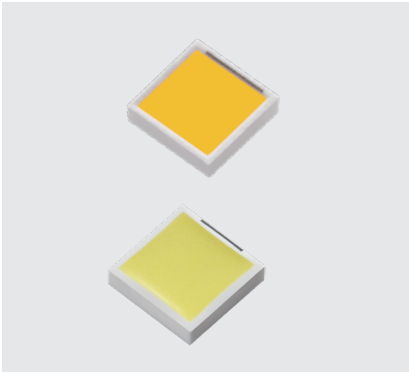

UNIT : mm

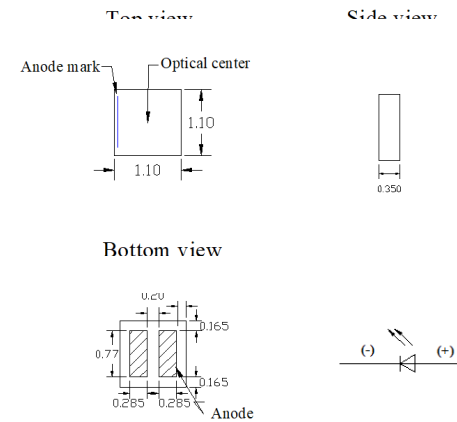


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FN1111	1.15x1.15x0.30	○White	2500~3000	230	2.85~3.60	1000	-
	1.15x1.15x0.30	○White	7000~10000	205	2.85~3.60	1000	90

Flash LED | 1212series | CSP




UNIT : mm

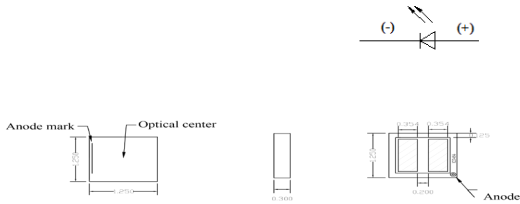


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FN1212	1.25x1.25x0.30	○White	4700~5200	330	2.85~3.60	1000	>80

Flash LED | 1414 series | CSP

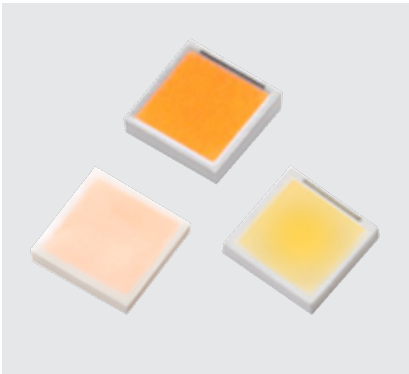


UNIT : mm

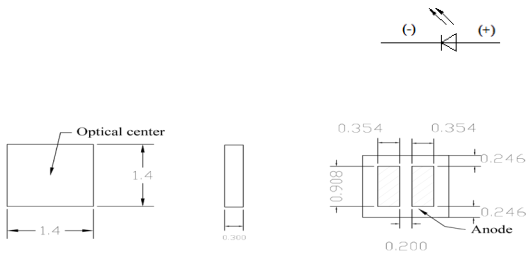


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FN1414	1.4x1.4x0.30	○White	1700~2100	260	2.85~3.60	1000	-
	1.4x1.4x0.30	○White	2000~2500	260	2.85~3.60	1000	-
	1.4x1.4x0.30	○White	3700~4200	250	2.85~3.60	1200	>90
	1.4x1.4x0.30	○White	4000~5000	300	2.85~3.60	1000	>80
	1.4x1.4x0.30	○White	5000~6000	300	2.85~3.60	1000	-

Flash LED | 1414 series | CSP

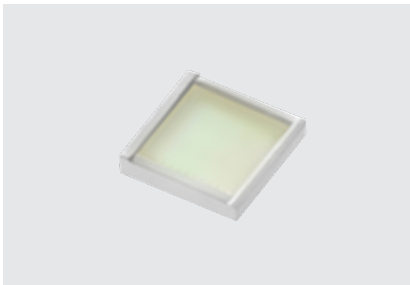


UNIT : mm

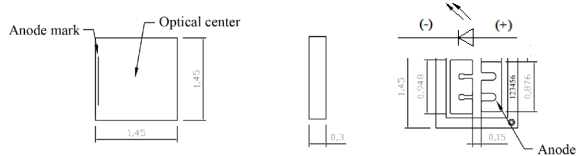


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FN1414G	1.45x1.45x0.30	● Green	520-530nm	250	2.85~3.40	700	-

Flash LED | 1919series | CSP

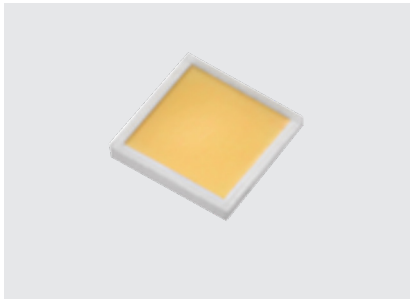

UNIT : mm

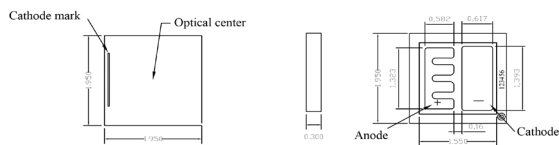


Product	Dimension (mm)	Color	CCT	Luminous Flux(Typ.)	Forward Voltage (V)	IF (mA)	CRI
FN1919	1.95x1.95x0.3	○ White	4300~4800	580	3.0~4.0	1500	>80

SMD LED ■ Subminiature LED Lamps (Leadframe)




UNIT : mm

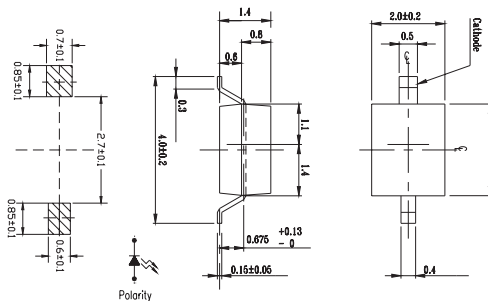

Product	Size (LxWxHmm)	Color		I _v			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
28-21SDRC/S530-A3/TR8	2.5x2.0x1.4	● Deep Red	639	20	27	-	1.7	2	2.4	25
28-21UYC/S530-A3/TR8	2.5x2.0x1.4	● Yellow	589	21	33	-	-	2	2.4	20
28-21SYGC/S530-E3/TR8	2.5x2.0x1.4	● Brilliant Yellow Green	573	16	27	-	1.7	2	2.4	20




UNIT : mm

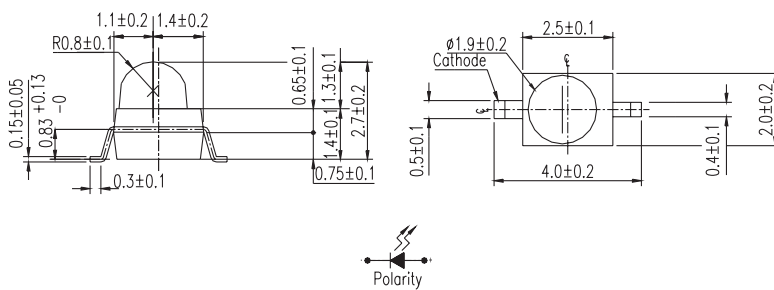

Product	Size (LxWxHmm)	Color		I _v			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
91-21SYGC/S530-E4/TR7	2.0x2.5x2.7	● Brilliant Yellow Green	573	528	594	-	-	2	2.4	20
91-21SURC/S530-A6/TR7	2.0x2.5x2.7	● Brilliant Red	624	802	1232	-	-	2	2.4	20
91-21UYC/S530-A6/TR7	2.0x2.5x2.7	● Super Yellow	589	991	1454	-	-	2	2.4	20
91-21SUGC/S400-A4/TR7	2.0x2.5x2.7	● Super Green	525	2000	2300	-	-	3.5	4.3	20



UNIT : mm

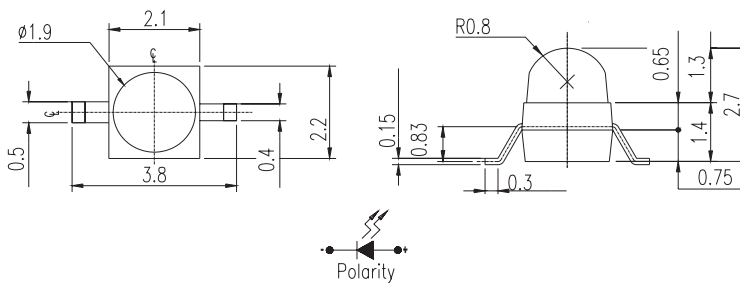


Product	Size (LxWxHmm)	Color		I _v			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
95-21SYGC/S530-E3/TR9	2.1x 2.0x2.7	● Brilliant Yellow Green	573	400	630	-	1.7	2	2.4	20
95-21UYC/S530-A5/TR7	2.1x 2.2x2.7	● Super Yellow	589	793	1156	-	-	2	2.4	20
95-21SURC/S530-A6/TR7	2.1x 2.2x2.7	● Brilliant Red	624	802	1232	-	-	2	2.4	20

SMD LED | Surface Mount (RGB+IC) | Top view B1818



UNIT : mm




Product	Size (LxWxHmm)	Color	I _V	V _F			IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
B1818IC/RSGHBHC-5V01/2T	1.8x1.8x0.65	● Brilliant Red ● Brilliant Green ● Blue	R:285~565 G:900~1800 B:180~360	VDD(4.5V)	VDD(5V)	VDD(5.5V)	20(I _{OUT})	120

SMD LED | Surface Mount (RGB+IC) | Top view B1414




UNIT : mm



Product	Size (LxWxHmm)	Color	I _V	V _F	IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) typ.		
B1414DWN3S2-RGBC0112-2T	1.4x1.4x0.4	● Brilliant Red ● Brilliant Green ● Brilliant Blue	R:180~720 G:720~1800 B:112~450	VDD(5V)	12	120

SMD LED ■ Surface Mount (RGB+IC) ■ Top view B1010

UNIT : mm




Product	Size (LxWxHmm)	Color	I _V	V _F	IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) typ.		
B1010DWN3S2-RGBC0105-5T	1.0x1.0x0.4	Brilliant Red Brilliant Green Brilliant Blue	R:45~122 G:90~225 B:18~45	VDD(5V)	5	120

SMD LED ■ Surface Mount (RGB+IC) ■ Side view



UNIT : mm




Product	Size (LxWxHmm)	Color		I _v		IF(mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.		
12-23C/RSGHBHW-5V01/2C	3.0 x 1.0 x 2.0	● Brilliant Red ● Brilliant Green ● Blue	R:617.5~629.5 G:525~540 B:465.5~476.5	R:22.5 G:45 B:18	R:72 G:140 B:57	5	130

SMD LED ■ Surface Mount (RGB+IC) ■ Side view B3010



UNIT : mm




Product	Size (LxWxHmm)	Color	I _V	V _F	IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) typ.		
B3010PWN3S1-GRBS0112-2D	3.0x1.0x1.5	● Brilliant Red ● Brilliant Green ● Blue	R:140~285 G:360~715 B:72~140	VDD(5V)	12(I_OUT)	120

SMD LED ■ Surface Mount (RGB+IC) ■ Top view C5050



UNIT : mm




Product	Size (LxWxHmm)	Color		I _V			IF(mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.		
C5050RDWN3S2-RGBC0120-T	5.0 x 5.0 x 1.6	● Brilliant Red ● Brilliant Green ● Brilliant Blue	R: 618-628 G: 521-531 B: 465-475	R: 355 G: 1000 B: 224	R: 564 G: 1500 B: 325	R: 800 G: 2200 B: 450	12	120

SMD LED ■ Surface Mount (RGB+IC) ■ Top view C3227



UNIT : mm




Product	Size (LxWxHmm)	Color	I _V	V _F			IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
C3227TDWN3S1-GRBC0112-2T	3.2x2.7x1.8	● Brilliant Red ● Brilliant Green ● Brilliant Blue	R:224~560 G:710~1800 B:180~450	VDD(4.5V)	VDD(5V)	VDD(5V)	12(I _{OUT})	120

SMD LED | Surface Mount (RGB+IC) | Side View C4516



UNIT : mm




Product	Size (LxWxHmm)	Color		I _V		IF(mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.		
C4516SDWN3S1-RGBC0120-2H	4.5 x 1.6 x 1.7	● Brilliant Red ● Brilliant Green ● Brilliant Blue	R:618~630 G:520~535 B:463~475	R:450 G:1120 B:280	R:1120 G:2800 B:710	20	120

SMD LED | Surface Mount (RGB+IC) | Side view C7024



UNIT : mm




Product	Size (LxWxHmm)	Color	I _V	V _F			IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
C7024SDWN3S1-RGBC0118-05H	7.0x2.4x2.35	● Brilliant Red ● Brilliant Green ● Brilliant Blue	R:450~1120 G:1120~2800 B:280~710	VDD(4.5V)	VDD(5V)	VDD(5V)	20(I_OUT)	120

SMD LED | Surface Mount (RGB+IC) | Side view C1818



UNIT : mm




Product	Size (LxWxHmm)	Color		I _V		IF(mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min	I _V (mcd) max.		
C1818FDWN3S1-RGBC0120-T	1.85x1.85x0.6	● Brilliant Red ● Brilliant Green ● Brilliant Blue	R:618~633 G:515~530 B:460~475	R:340 G:600 B:150 Mix W: 1400	R: 800 G: 1800 B: 450 Mix: 1900	20	120

SMD LED ■ Surface Mount (RGB+IC) ■ Side View B2706




UNIT : mm




Product	Size (LxWxHmm)	Color		I _v		IF(mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.		
B2706MWN4A2-RBGWS0105-3C	2.7x0.65x0.74	● Brilliant Red ● Brilliant Green ● Brilliant Blue ○ Pure White	B: 470~480 G:525~535 R: 617.5~625.5	B: 90 G: 360 R: 140 W: 225	B:180 G: 715 R: 285 W: 450	5	120

SMD LED ■ Surface Mount RGBW ■ Top View B1410

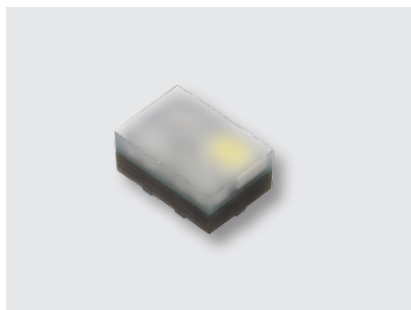

UNIT : mm




Product	Size (LxWxHmm)	Color	I _V	V _F		IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) min.	V _F (V) max.		
B1410FBN4A1-RGBWD0205-4T	1.45x1.0x0.65	● Brilliant Red ● Brilliant Green ● Brilliant Blue ○ Pure White	R: 90 ~180 G:225_450 B:45~90 W:180~450	R:1.7 G:2.4 B:2.6 W:2.6	R:2.7 G:3.2 B:3.2 W:3.2	10	120

SMD LED | Surface Mount RGBW | Top View B1212



UNIT : mm

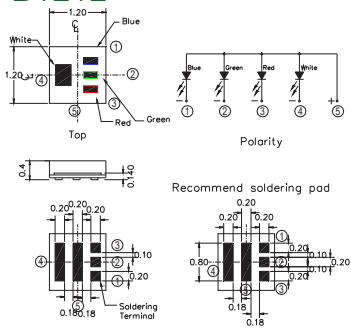


Product	Size (LxWxHmm)	Color	I _V	V _F			IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) min.	V _F (V) max.			
B1212CWN4A1-BGRWD0105-3T	1.2x1.2x0.4	● Brilliant Red ● Brilliant Green ● Brilliant Blue ○ Pure White	R:72~112 G:285~565 B:112~180 W:180~450	R:2.6 G:2.4 B:1.7 W:2.6	R:3.2 G:3.2 B:2.4 W:3.2		5	130

SMD LED | Surface Mount RGBW PLCC6 | Top view C3231




UNIT : mm




Product	Size (LxWxHmm)	Color	I _V	V _F			IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
C3231FFWN4A5-RGBWC0120-1T	3.2x3.5x0.65	● Brilliant Red ● Brilliant Green ● Brilliant Blue ○ White	R:560~1120 G:1440~2800 B:355~710 W:1800~3500	R:1.7 G:2.4 B:2.4 W:2.6	R:2.3 G:2.8 B:3.0 W:2.8	R:2.7 G:3.6 B:3.6 W:3.7	20 20 20 20	min:100 typ:120 max:140

SMD LED ■ Surface Mount PLCC6 LED (Reflector) ■ Side View RGBW

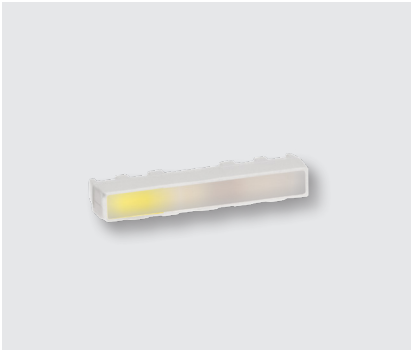

UNIT : mm

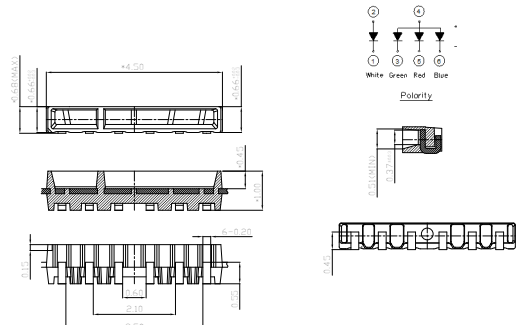


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V)	V _F (V)		
C4506RGBW-DP02-2G(AES)	4.5 x 1.25 x 0.6	● Red ● Green ● Blue ○ White	R: 520-530 G: 517-630 B: 465-475 X:0.310-0.3210 Y:0.2840-0.3600	R: 1580 G: 1350 B: 700 W:280	R: 2800 G: 2700 B: 700 W: 280	R: 1.5-2.2 G: 1.9-2.8 B: 2.0-2.9 W:2.2-2.9		2mA	120

SMD LED ■ Surface Mount PLCC2 LED (Reflector) ■ Top View Mono



UNIT : mm

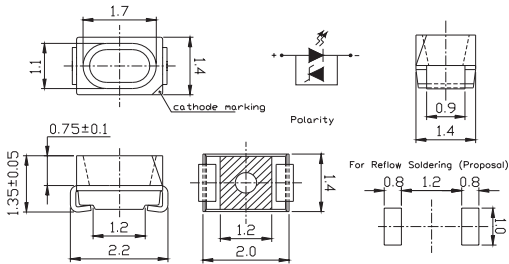


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
65-11/BHC-AR1S2B2/2T	2.2x1.4x1.35	● Blue	464.5~476.5	112	285	2.9	3.6	20
65-11/T2C-FV1W2E/2T	2.2x1.4x1.35	○ Pure White	x=0.283~0.33 y=0.276~0.36	715	1800	2.75	3.65	20

SMD LED ■ Surface Mount PLCC2 LED (Reflector) ■ Top View Mono



UNIT : mm

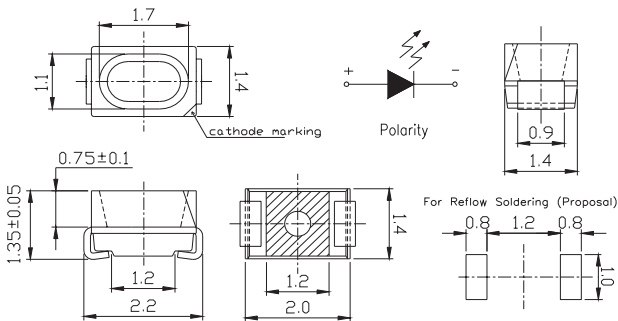


Product	Size (LxWxHmm)	Color		I _v		V _F (V)		IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	V _F (V) typ.	V _F (V) max.	
65-21/G6C-AN2Q1/3T	2.2x1.4x1.35	Brilliant Yellow Green	569.5~577.5	36	90	1.75	2.35	20
65-21/BHC-FS/T1B14/2T	2.2x1.4x1.35	Blue	464~472	180	360	2.7	3.5	20
65-21/Y2SC-AR1S2B/2T	2.2x1.4x1.35	Brilliant Yellow	585.5~594.5	112	285	1.75	2.35	20
65-21/R6C-AQ1R2B/2T	2.2x1.4x1.35	Brilliant Red	616.5-634.5	72	180	1.75	2.35	20

SMD LED ■ Surface Mount PLCC2 LED (Reflector) ■ Top View Mono




UNIT : mm

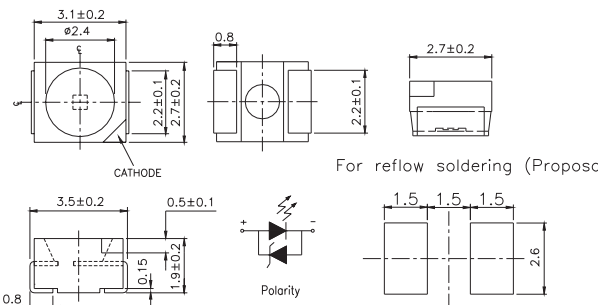


Product	Size (LxWxHmm)	Color		I _v		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.	V _F (V) min.	V _F (V) max.	
67-11/BHC-FQ2S1F/2T	3.5 x 2.7 x 1.9	Blue	464 - 472	90	285	2.7	3.5	25
67-11/W1C-ES1T2N/2T	3.5 x 2.7 x 1.9	Warm White	x: 0.264 - 0.33 y: 0.248 - 0.36	180	450	2.7	3.7	25
67-11/W1C-FV1W2F/2T	3.5 x 2.7 x 1.9	White	x: 0.283 - 0.33 y: 0.276 - 0.36	715	1800	2.7	3.5	25

SMD LED ■ Surface Mount PLCC2 LED (Reflector) ■ Top View Mono

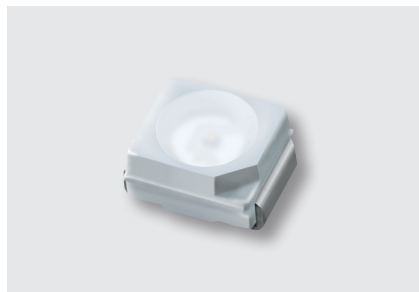

UNIT : mm

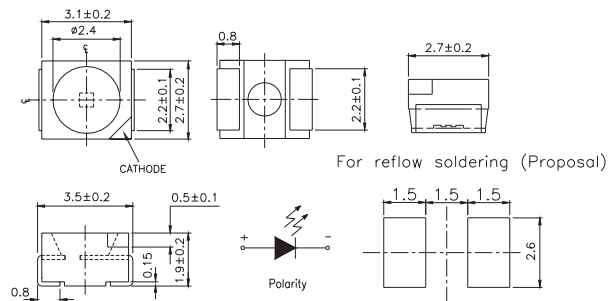


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
67-21/B7C-AS2U1N/2T	3.5x2.7x1.9	Blue	464.5~476.5	225	565	2.7	3.7	20
67-21/GBC-YV2W2N/2T	3.5x2.7x1.9	Brilliant Green	520~535	900	1800	2.7	3.7	20
67-21/R6C-FN2Q1BZ/2T	3.5x2.7x1.9	Brilliant Red	621~631	36	90	1.75	2.35	10
67-21/RSC-FT2V1B/2T	3.5x2.7x1.9	Brilliant Red	621~631	360	900	1.75	2.35	20
67-21/S2C-AQ2S1B/2T	3.5x2.7x1.9	Brilliant Orange	600.5~612.5	90	225	1.75	2.35	20
67-21/T2C-ZV1W2E/2T	3.5x2.7x1.9	White	x=0.2498~0.296 y=0.2185~0.2950	715	1800	2.75	3.65	20
67-21/YSC-FU1V2B/2T	3.5x2.7x1.9	Brilliant Yellow	586~594	450	1120	1.75	2.35	20

SMD LED ■ Surface Mount PLCC4 LED (Reflector) ■ Top View Mono



UNIT : mm

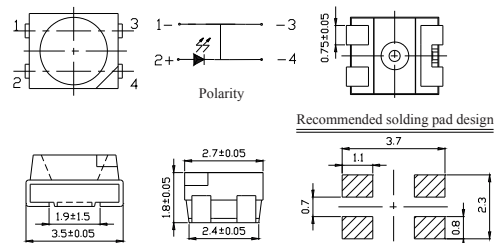


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
67-31A/SAC-AW1X2B9Z5/2T	3.5x2.7x1.8	Reddish Orange	605.5~625.5	1120	—	2850	1.95	—	2.75	50
67-31A/GHC-YV1W2EZ3/2T	3.5x2.7x1.8	Green	520~535	715	—	1800	2.75	—	3.65	30
67-31A/B7C-AT1U2MZ3/2T	3.5x2.7x1.8	Blue	464.5~476.5	285	—	715	2.75	—	3.95	50

SMD LED | Surface Mount PLCC4 LED (Reflector) | Top View Mono



UNIT : mm

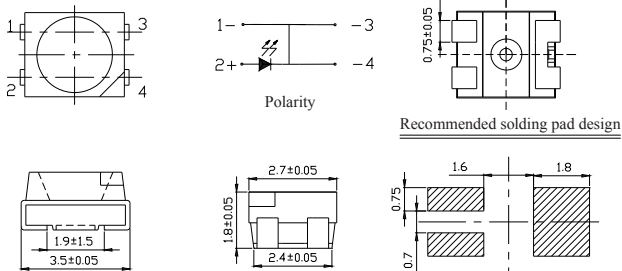


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
67-31E/RSC-AV1W2B9Z5/2T	3.5x2.7x1.8	● Brilliant Red	617.5-633.5	715	—	1800	2.15	—	2.75	50

SMD LED | Surface Mount PLCC2 LED (Reflector) | Top View 3014




UNIT : mm

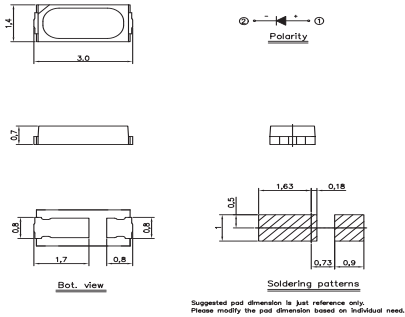


Product	Size (LxWxHmm)	Color		I _V		V _F		IF(mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.		
3014-BUT-SBBBCAK1E-2T8-CS	3.0x1.4x0.7	○ White	x: 0.28 - 0.30 y: 0.2466-0.3034	2240	3550	2.4	3.6	20	120

SMD LED | Surface Mount PLCC4 LED (Reflector) | Top View C2016

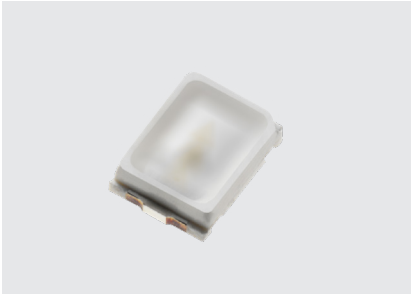

UNIT : mm

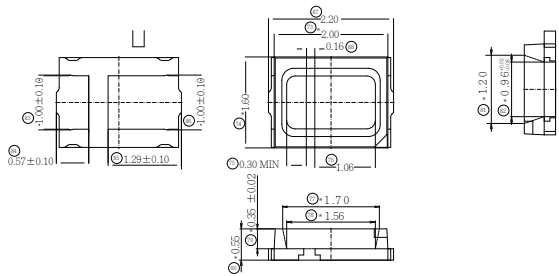


Product	Size (LxWxHmm)	Color		I _V (mcd) min.	I _V (mcd) max.	VF	IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE					
C2016EDWN1-RC61620182306-3T	2.0 x 1.6 x 0.6	● Brilliant Red	617-629	180	355	1.55-2.35	6	120

SMD LED ■ Surface Mount PLCC2 LED (Reflector) ■ Top View Mono



UNIT : mm

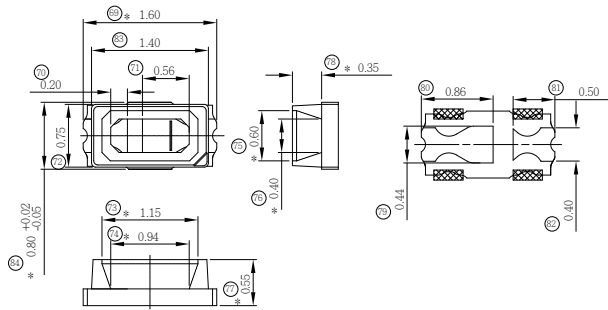


Product	Size (LxWxHmm)	Color		I _V		V _F (V)	IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V)		
C1608EDWN1-BC46472243620-T	1.6 x 0.8 x 0.55	● Blue	465-475	224	450	2.6-3.6	20	120
C1608EDWN1-WP30301803420-2T	1.6 x 0.8 x 0.55	○ White	X: 0.2730~0.3056 Y: 0.2430~0.3290	1800	3050	2.6-3.4	20	120
C1608-GCZ0ABK4E-2T	1.6 x 0.8 x 0.55	● Brilliant Green	520-540	1400	2800	2.4-3.1	20	120

SMD LED ■ Surface Mount PLCC4 LED (Reflector) ■ Top View LED Bi-Color



UNIT : mm

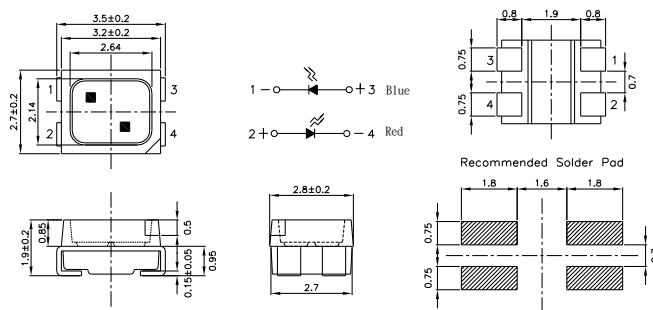


Product	Size (LxWxHmm)	Color		I _V			V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
67-22/R6BHC-B07/2T	3.5x2.8x1.9	● Brilliant Red ● Blue	R6:621-631 BH:466.5-471.5	R6:90 BH:90	—	R6:225 BH:225	R6:1.75 BH:2.9	R6:2.35 BH:3.7	20
67-22/R6Y2C-B31/2T	3.5x2.8x1.9	● Brilliant Red ● Brilliant Yellow	R6:621-631 SYG:586-594	R6:72 SYG:72	—	R6:285 SYG:285	R6:1.75 SYG:1.75	R6:2.35 SYG:2.35	20
67-22UYSYGC/S530-A5/TR8	3.5x2.8x1.9	● Brilliant Yellow ● Brilliant Yellow Green	UY:589 SYG:573	UY:80 SYG:50	UY:120 SYG:80	—	UY:1.7/2.0 SYG:1.7/2.0	UY:2.4 SYG:2.4	20

SMD LED | Surface Mount PLCC6 LED (Reflector) | Top View Full-color PLCC



UNIT : mm




Product	Size (LxWxHmm)	Color		I _V		V _F		IF(mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.		
67-135-BYGRRTNW-M101520-2T8-CS	3.6x3.2x0.9	● Red ● Green ● Blue ○ White	R:617.5~629.5 G: 520~535 B:460~475 CIE_X:0.264-0.324 CIE_Y:0.256-0.316	R:450 G:900 B:140 W:1400	R:1120 G:2240 B:355 W:3550	R:1.75 G:2.4 B:2.4	R:2.75 G:3.4 B:3.4	R:20 G:15 B:10	120

SMD LED | Surface Mount PLCC6 LED (Reflector) | Top View Full-color PLCC



UNIT : mm

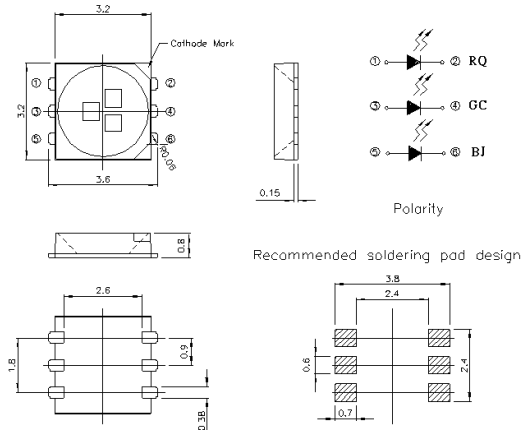


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min./typ.	V _F (V) max.	
67-235-BJRQGCC-A01E-2T8-CS	3.2x3.2x0.8	● BQ:Super-Red ● GC:Brilliant Green ● BJ:Blue	BQ:617.5-629.5 GC:525-535 BJ:465-475	BQ:450 GC:1120 BJ:225	BQ:900 GC:1800 BJ:450	BQ:1.75 GC:2.75 BJ:2.75	BQ:2.75 GC:3.65 BJ:3.65	20

SMD LED ■ Surface Mount PLCC2 LED (Reflector) ■ Top View LED Full Color



UNIT : mm

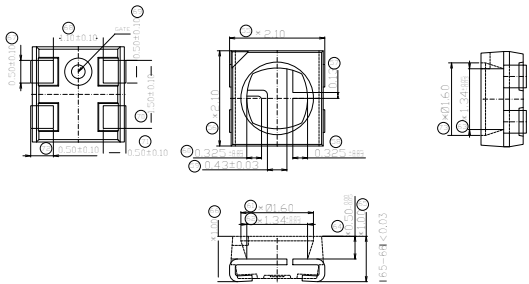


Product	Size (LxWxHmm)	Color		I _V (mcd) min.	I _V (mcd) max.	V _F	I _F (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE					
C2121JDWN3A1-RGBD020202-3T	2.1 x 2.1 x 1.0	● Brilliant Red ● Brilliant Green ● Blue	R: 617-626 G: 526-535 B: 469-478	R:75 G:285 B:55	R:130 G:495 B:97	R:1.3-2.2 G:2.1-2.9 B:2.1-2.9	2.5mA	120

SMD LED ■ Surface Mount PLCC6 LED (Reflector) ■ Top View LED Full Color




UNIT : mm

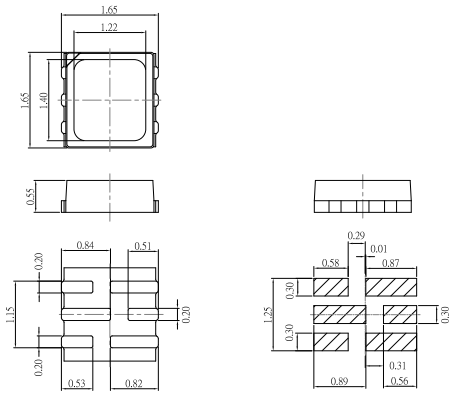


Product	Size (LxWxHmm)	Color		I _V		V _F (V)	I _F (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V)		
C1616EFWN3-RGBD0610-2T	1.6 x 1.6 x 0.55	● Brilliant Red ● Brilliant Green ● Blue	R: 615~630 G: 525~535 B: 465~475	R: 210 G: 710 B: 170	R: 480 G: 1400 B: 325	R: 1.7-2.5 G: 2.4-3.4 B: 2.4-3.4	10	120

SMD LED ■ Surface Mount PLCC2 LED (Reflector) ■ Side View LED

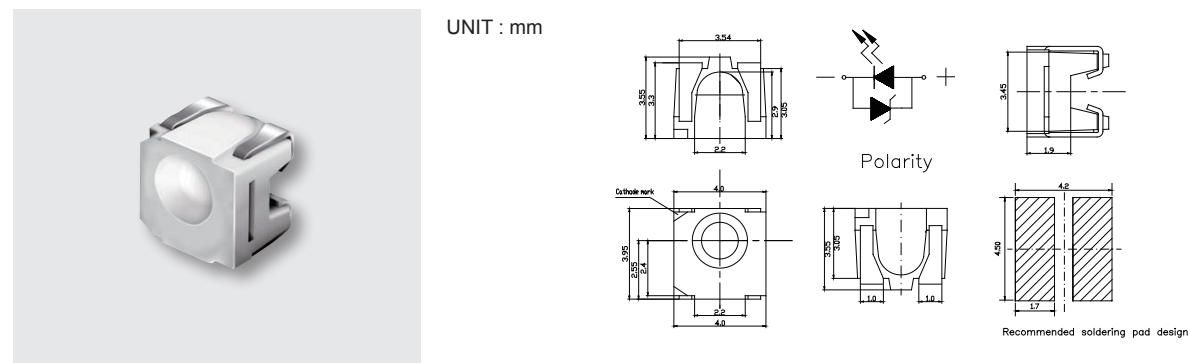

Product	Size (LxWxHmm)	Color		I _V		V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
57-11UTC/S827-1/TR8	4.0x4.0x3.6	○ White	x=0.3070~0.3520 y=0.2840~0.3710	900	1800	2.75	-	3.95	20

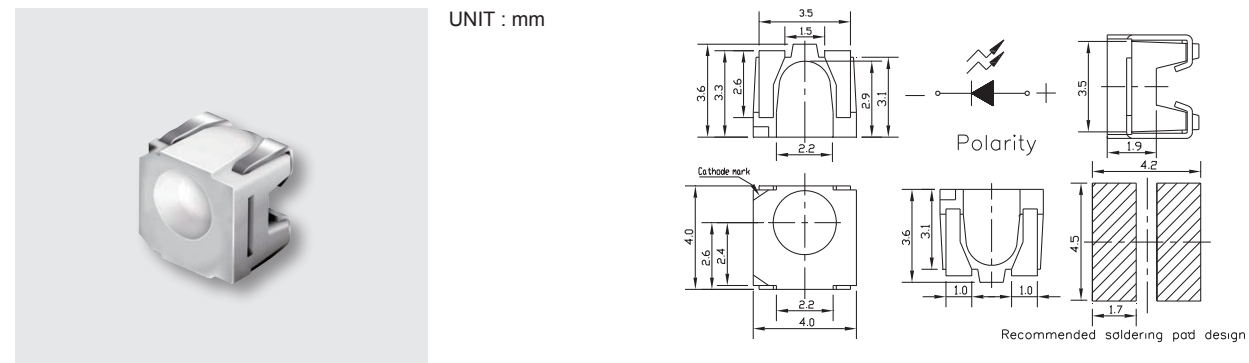


Product	Size (LxWxHmm)	Color		I _V		V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
57-21/R6C-AP1Q2B/BF	4.0x4.0x3.6	● Brilliant Red	617.5-633.5	45	112	1.75	-	2.35	10
57-21SYGC/S530-E3/TR8	4.0x4.0x3.6	● Brilliant Yellow Green	573	32	-	1.7	2	2.4	20

SMD LED | Surface Mount PLCC2 LED (Reflector) | Side View Mono




UNIT : mm

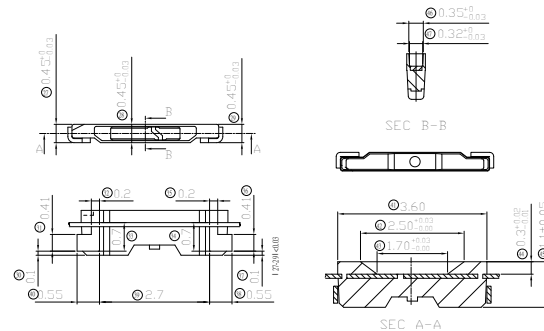


Product	Size (LxWxHmm)	Color		I _v		V _F (V)	IF(mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.	V _F (V)		
99-218/B2C-AQ1Q2DY/2C	3.8x1.1x0.4	● Blue	464.5~476.5	72	112	2.75-3.35	25	110
99-218/RSC-DQ2R2BY/2C	3.8x1.1x0.4	● Brilliant Red	617.5~629.5	90	180	1.75-2.35	5	110
99-218/Y2SC-AR2T1B23/2C	3.8x1.1x0.4	● Brilliant Yellow	585.5-594.5	140	360	1.75-2.55	20	120
99-218-BUT-MVAWBWA7E-2G-CS	3.8x1.1x0.4	○ White	CIE_X:0.2570 CIE_Y:0.2420	1120	2800	2.6-3.8	30	120

SMD LED ■ Surface Mount PLCC4 LED (Reflector) ■ Reverse Mount LED Bi-Color

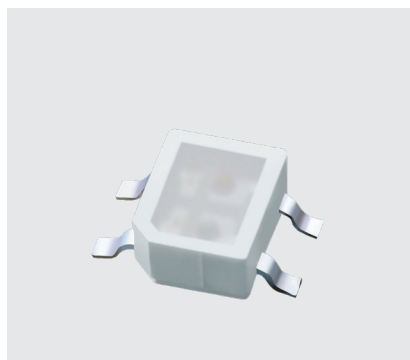

UNIT : mm

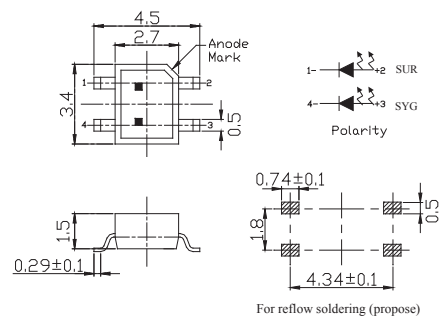


Product	Size (LxWxHmm)	Color		I _v				IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	V _F (V) typ.	V _F (V) max.	
93-22SURSYGC/S530-A3/TR8	3.4x2.7x1.5	Brilliant Red Brilliant Yellow Green	R:624 YG:573	R:17 YG:11	R:41 YG:17	R:2.0 YG:2.0	R:2.4 YG:2.4	20

SMD LED ■ Surface Mount PLCC6 LED (Reflector) ■ Side View Full-color



UNIT : mm

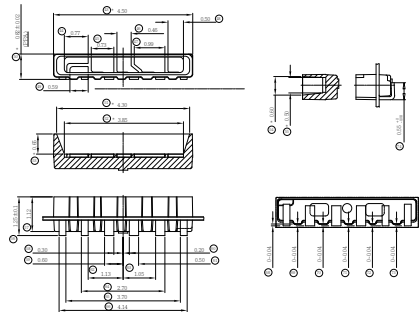


Product	Size (LxWxHmm)	Color		I _V		VF	IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.			
99-235-RSHBOGSC-A20-2H-CS	4.5 x 1.25 x 0.8	● Brilliant Red ● Brilliant Green ● Blue	RSH: 617.5~629.5, GS: 515~530 , BO: 464.5~473.5	RSH: 560 GS: 1120 BO: 224	RSH: 1400 GS: 2800 BO: 560	RSH: 1.7-2.7 GS: 2.7-3.7 BO: 2.7-3.7	30	120

SMD LED ■ Surface Mount PLCC4 LED (Reflector) ■ Side View Full-color



UNIT : mm

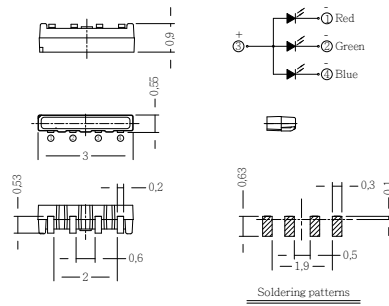


Product	Size (LxWxHmm)	Color		I _V			V _F	IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V)		
C3005DDWN3A3-RGBD0120-2G	3.0 x 0.9 x 0.5	● Brilliant Red ● Brilliant Green ● Blue	R: 617~629 G: 517~527 B: 465~475	R: 560 G: 1120 B: 224	-	R: 1120 G: 2240 B: 450	R: 1.8-2.7 G: 2.6-3.5 B: 2.6-3.5	20	120

SMD LED ■ Surface Mount PLCC6 LED (Reflector) ■ Side View Full Color



UNIT : mm

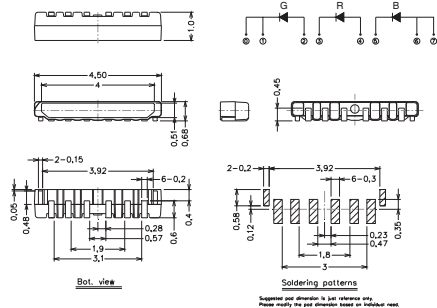


Product	Size (LxWxHmm)	Color		I _V			V _F	IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V)		
C4506FDWN301-GRBD01302017-2G	4.5 x 1.25 x 0.6	● Red ● Green ● Blue	R: 618-628 G: 520-535 B: 462-472	R:635 G:1600 B:225	R:1075 G:2725 B:375	R:1680 G:4045 B:615	R:1.8-2.5 G:2.7-3.4 B:2.45-3.15	R:20mA G:30mA B:17mA	120

SMD LED | Surface Mount LED (PCB) | Top View 0201




UNIT : mm

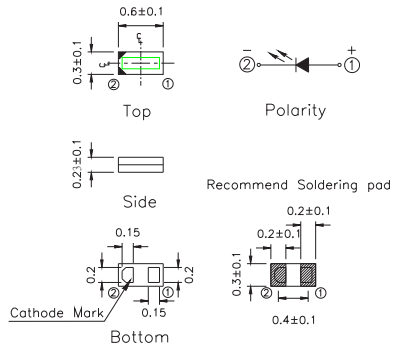

Product	Size (LxWxHmm)	Color		I _v		IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.		
B0603BWN1-GC5253452705-T	0.6x0.3x0.2	● Brilliant Green	520~535	450	715	5	120




UNIT : mm

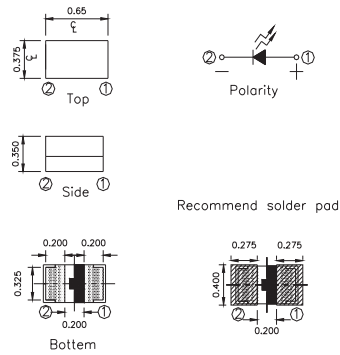


Product	Size (LxWxHmm)	Color		I _v		IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.		
18-218/BHC-AL2N1RX/3T	0.65x0.375x0.35	● Blue	464.5~476.5	14.5	36	2	120
18-218/GHC-YP2R1RX/3T	0.65x0.375x0.35	● Brilliant Green	520~535	57	140	2	120
18-218/R6C-AK1L2BX/3T	0.65x0.375x0.35	● Brilliant Red	617.5~633.5	7.2	18	2	120
18-218/Y5C-AJ1K2BX/3T	0.65x0.375x0.35	● Brilliant Yellow	585.5~594.5	4.5	11.5	2	120
18-218/S2C-BK1L2X/3T	0.65x0.375x0.35	● Brilliant Orange	597.5~609.5	7.2	18	2	120

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0402 (0.2T~0.5T)

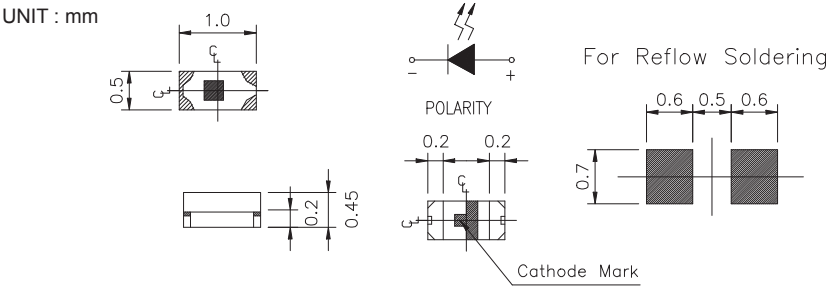

Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
16-213/BHC-ZL1M2QY/3T	1.0x0.5x0.45	● Blue	470	11.5	28.5	2.7	3.2	5
16-213/GHC-YR1S1/3T	1.0x0.5x0.45	● Brilliant Green	525	112	225	2.7 / 3.3	3.7	20
16-213/R6C-AQ2R2B/3T	1.0x0.5x0.45	● Brilliant Red	617.5~633.5	90	180	1.75	2.35	20
16-213/T7D-AQ1R1QY/3T	1.0x0.5x0.45	○ Pure White	x=0.29, y=0.30	72	140	2.7	3.2	5

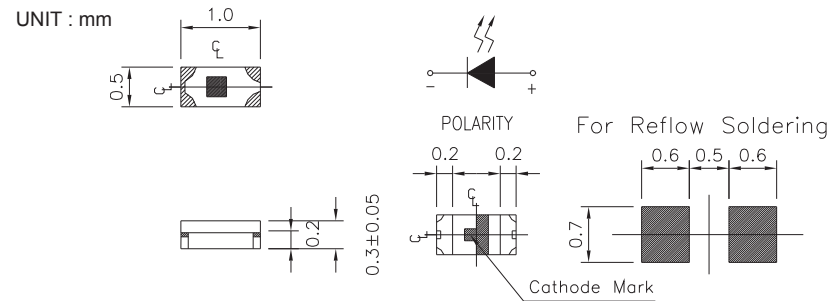


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
16-216/T3D-AQ1R2TY/3T	1.0x0.5x0.3	○ Pure White	CIE_X:0.274-0.334 CIE_Y:0.226-0.376	72	—	180	2.6	—	3	5

SMD LED | Surface Mount Chip LED (PCB) | Top View 0402 (0.2T~0.5T)




UNIT : mm

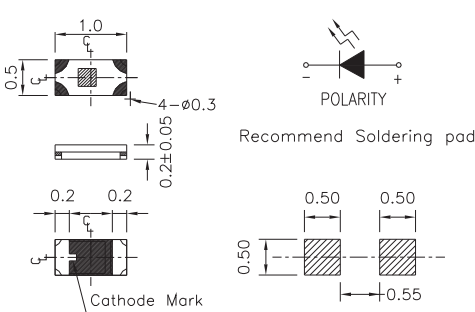


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
16-219A/T2D-AR2T1QY/3T	1.0x0.5x0.2	○ Pure White	CIE_X:0.274-0.334 CIE_Y:0.226-0.376	140	—	360	2.7	—	3.2	5

SMD LED | Surface Mount Chip LED (PCB) | Top View 0603 (0.2T~0.8T)

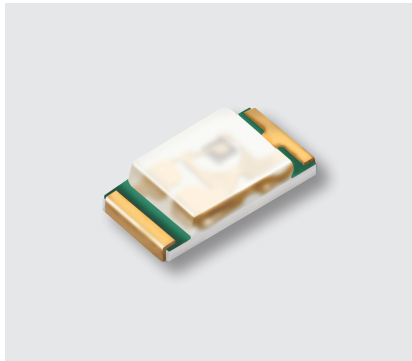


UNIT : mm

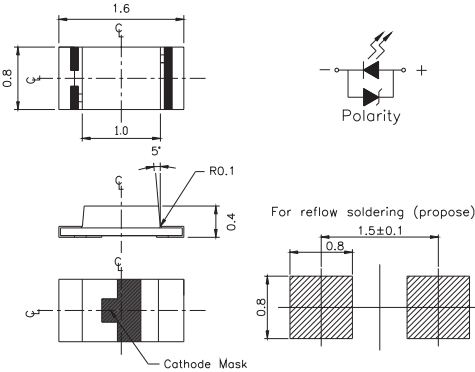


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
19-117/BHC-YJ2K2TX/3T	1.6x0.8x0.4	● Blue	470-475	5.8	11.5	206	3	2
19-117/BHC-ZL1M2RY/3T	1.6x0.8x0.4	● Blue	465-475	11.5	28.5	2.5	3.1	5
19-117/T1D-AP2Q2QY/3T	1.6x0.8x0.4	○ Pure White	x=0.274, y=0.226	57	112	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)

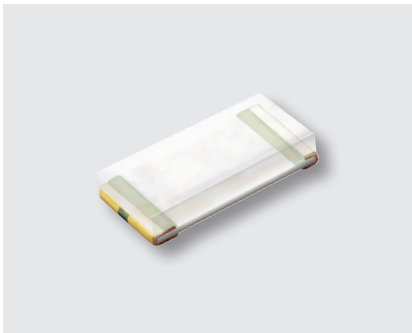


UNIT : mm

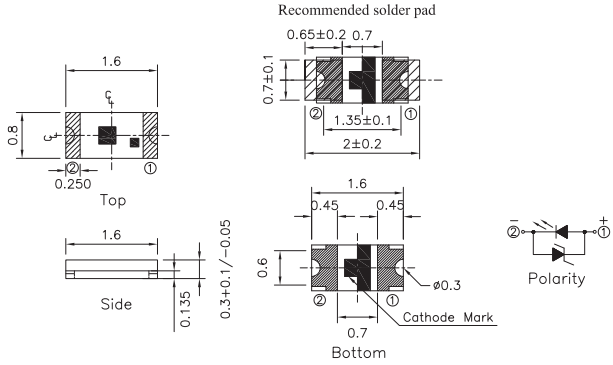

Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
19-118/BHC-ZL1M2QY/3T	1.6x0.8x0.3	● Blue	465-475	11.5	—	28.5	2.7	—	3.2	5




UNIT : mm

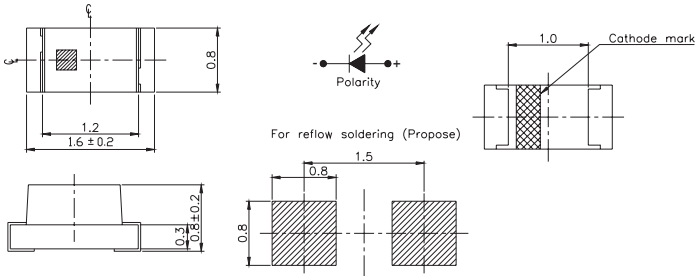


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
19-21/B6C-AP2Q2M/3T	1.6x0.8x0.8	● Blue	470	57	112	2.75	3.95	20
19-21/BHC-ZQ1R2N/3T	1.6x0.8x0.8	● Blue	470	72	180	2.7	3.7	20
19-21/G6C-AL1M2LY/3T	1.6x0.8x0.8	● Brilliant Yellow Green	573	11.5	28.5	1.7	2.3	5
19-21/G6C-FP1Q1L/3T	1.6x0.8x0.8	● Brilliant Yellow Green	573	45	90	1.7	2.3	20
19-21/GHC-YP1Q2TY/3T	1.6x0.8x0.8	● Brilliant Green	525	45	112	2.6	3.0	5
19-21/GPC-FL1M2B/3T	1.6x0.8x0.8	● Green	562	11.5	28.5	1.75	2.35	20
19-21/R6C-AL2N1VY/3T	1.6x0.8x0.8	● Brilliant Red	624	14.5	36	1.7	2.2	5
19-21/R6C-FP1Q2L/3T	1.6x0.8x0.8	● Brilliant Red	624	45	112	1.7	2.3	20
19-21/R7C-AK1L2BY/3T	1.6x0.8x0.8	● Deep Red	631	7.2	18	1.75	2.35	5
19-21/R8C-FN2Q1L/3T	1.6x0.8x0.8	● Deep Red	639	36	90	1.7	2.3	20
19-21/S2C-AL2M2VY/3T	1.6x0.8x0.8	● BrilliantOrange	605	14.5	28.5	1.7	2.2	5
19-21/S2C-AQ1R2B/3T	1.6x0.8x0.8	● BrilliantOrange	605	72	180	1.75	2.35	20
19-21/T1D-CPQTY/3T	1.6x0.8x0.8	○ Pure White	x=0.274, y=0.226	45	112	2.6	3	5
19-21/Y2C-AL1M2VY/3T	1.6x0.8x0.8	● Brilliant Yellow	589	11.5	28.5	1.7	2.2	5
19-21/Y2C-CP1Q2B/3T	1.6x0.8x0.8	● Brilliant Yellow	589	45	112	1.75	2.35	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)

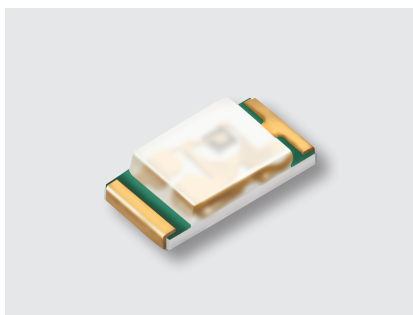

UNIT : mm

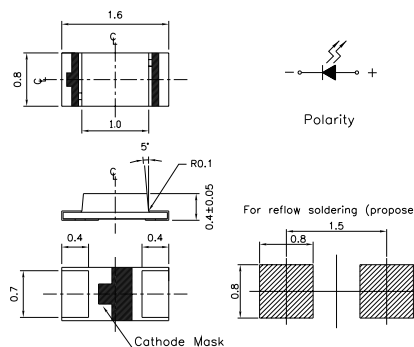


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
19-217/BHC-AN1P2/6T	1.6x0.8x0.4	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
19-217/BHC-XK1L2B11X/6T	1.6x0.8x0.4	● Blue	470	7.2	18	2.6	2.9	2
19-217/G7C-AN1P2/6T	1.6x0.8x0.4	● Brilliant Yellow Green	573	28.5	72	1.7/2.0	2.4	20
19-217/GHC-YR1S2/6T	1.6x0.8x0.4	● Brilliant Green	525	112	285	2.7 / 3.3	3.7	20
19-217/R6C-P1Q2/6T	1.6x0.8x0.4	● Brilliant Red	624	45	112	1.7 / 2	2.4	20
19-217/S2C-AL1M2VY/6T	1.6x0.8x0.4	● Brilliant Orange	605	11.5	28.5	1.7	2.2	5
19-217/S3C-AL2N1VY/6T	1.6x0.8x0.4	● Reddish Orange	615	14.5	36	1.7	2.2	5
19-217/T1D-CQ2R2TY/6T	1.6x0.8x0.4	○ Pure White	x=0.274,y=0.226	90	180	2.6	3.0	5
19-217/T7D-CT2V1N/6T	1.6x0.8x0.4	○ Pure White	x=0.274,y=0.226	360	900	2.7	3.7	20
19-217/Y5C-AP1Q2/6T	1.6x0.8x0.4	● Brilliant Yellow	589	45	112	1.7/2.0	2.4	20
19-217/Y5C-AQ2R2/6T	1.6x0.8x0.4	● Brilliant Yellow	589	90	180	1.7 / 2	2.4	20


SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)



UNIT : mm

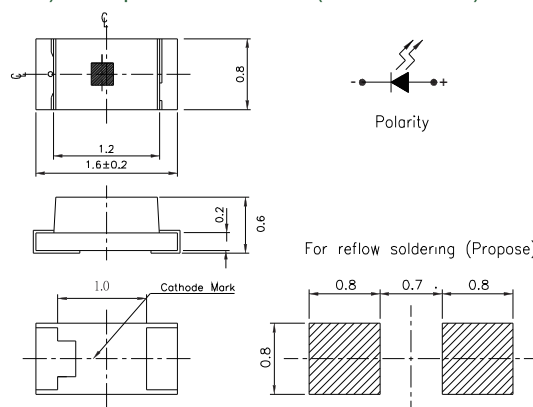


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
19-213/BHC-AP1Q2/5T	1.6x0.8x0.6	● Blue	470	45	112	2.7	3.7	20
19-213/G6C-AP1Q2/5T	1.6x0.8x0.6	● Brilliant Yellow Green	573	45	112	2	2.4	20
19-213/GHC-XS1T1N/5T	1.6x0.8x0.6	● Brilliant Green	525	180	360	2.7	3.7	20
19-213/R6C-AQ1R2B/5T	1.6x0.8x0.6	● Brilliant Red	624	72	180	1.75	2.35	20
19-213/R8C-FN1P2/5T	1.6x0.8x0.6	● Deep Red	639	28.5	72	1.7 / 2	2.4	20
19-213/S2C-AP1Q2B/5T	1.6x0.8x0.6	● Brilliant Orange	605	45	112	1.75	2.35	20
19-213/S3C-AN2P2B/5T	1.6x0.8x0.6	● Reddish Orange	615	36	72	1.75	2.35	20
19-213/T1D-KS1T1N/5T	1.6x0.8x0.6	○ Pure White	x=0.294, y=0.254	180	360	2.7	3.7	20
19-213/Y2C-CQ2R2L/5T	1.6x0.8x0.6	● Brilliant Yellow	589	90	180	1.7	2.3	20

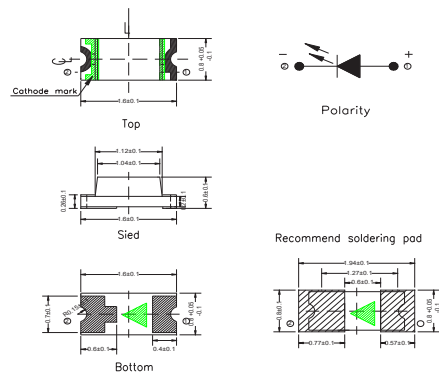

Product	Size (LxWxHmm)	Color		I _V		V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
19E-213/T1D-KS1T1N/5T	1.6x0.8x0.6	○ Pure White	x=0.294,y=0.254	180	360	2.7	-	3.7	20
19E-213/R6C-AR1S1B/5T	1.6x0.8x0.6	● Brilliant Red	617.5~633.5	112	225	1.75	-	2.35	20
19E-213/GHC-YR1S2/5T	1.6x0.8x0.6	● Brilliant Green	520~535	112	285	-	3.5	4	20
19E-213/B7C-AR2S2B2/5T	1.6x0.8x0.6	● Blue	464.5~476.5	140	285	2.9	-	3.6	20
19E-213/Y2C-CQ2R2L	1.6x0.8x0.6	● Brilliant Yellow	585.5~591.5	90	180	1.7	-	2.3	20
19E-213/S2C-AQ2R2B/5T	1.6x0.8x0.6	● Brilliant Orange	600.5~612.5	90	180	1.75	-	2.35	20
19E-213/G6C-AN2P2B/5T	1.6x0.8x0.6	● Brilliant Yellow Green	569.5~577.5	36	72	1.75	-	2.35	20

SMD LED

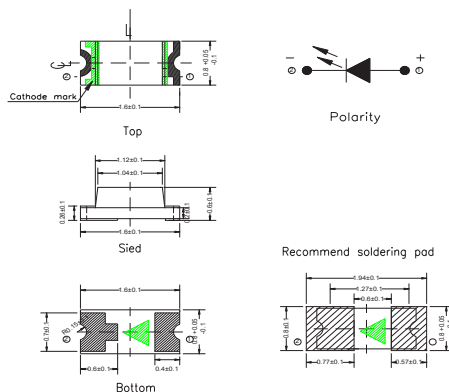


Product	Size (LxWxHmm)	Color		I _V		V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
19E-217/T1D-CQ2R2TY/6T	1.6x0.8x0.4	○ Pure White	x=0.274,y=0.226	360	900	2.7	-	3.7	20
19E-217/R6C-ALIM2VY/6T	1.6x0.8x0.4	● Brilliant Red	617.5~633.5	11.5	28.5	1.7	-	2.2	5
19E-217/GHC-YR1S2/6T	1.6x0.8x0.4	● Brilliant Green	520~535	112	285	2.7	3.3	3.7	20
19E-217/B7C-ZL2N1B3X/6T	1.6x0.8x0.4	● Blue	464.5~476.5	28.5	72	2.7	3.3	3.7	20
19E-217/Y5C-AR2S2B/6T	1.6x0.8x0.4	● Brilliant Yellow	585.5~591.5	140	285	1.75	-	2.35	20
19E-217/S2C-AM2N2VY/6T	1.6x0.8x0.4	● Brilliant Orange	600.5~612.5	22.5	45	1.7	-	2.2	5
19E-217/G6C-JL1M2VY/6T	1.6x0.8x0.4	● Brilliant Yellow Green	569.5~577.5	11.5	28.5	1.7	-	2.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)




UNIT : mm

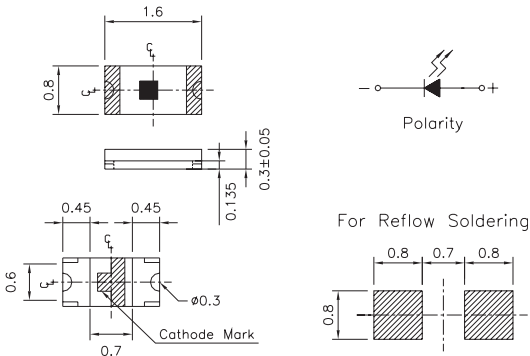

Product	Size (LxWxHmm)	Color		I _v		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.	V _F (V) min.	V _F (V) max.	
19-218/BHC-ZL1M2QY/3T	1.6x0.8x0.3	● Blue	470	11.5	28.5	2.7	3.2	5
19-218/GHC-YR1S2M/3T	1.6x0.8x0.3	● Brilliant Green	525	112	285	2.75	3.95	20
19-218/R6C-FM2P1B7Y/3T	1.6x0.8x0.3	● Brilliant Red	624	22.5	57	1.7	2	5
19-218/T1D-CQ2R2TY/3T	1.6x0.8x0.3	○ Pure White	x=0.274, y=0.226	90	180	2.6	3	5



UNIT : mm

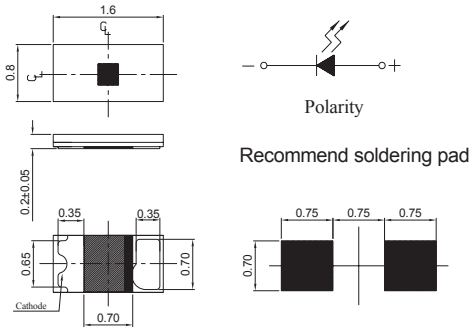


Product	Size (LxWxHmm)	Color		I _v		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.	V _F (V) min.	V _F (V) max.	
19-219/T3D-AQ2R2TY/3T	1.6x0.8x0.2	○ Pure White	x=0.274, y=0.226	90	180	2.6	3	5
19-219/T7D-AV1W1E/3T	1.6x0.8x0.2	○ Pure White	x=0.274, y=0.226	715	1420	2.75	3.65	20
19-219/Y5C-AM1N2VY/3T	1.6x0.8x0.2	● Brilliant Yellow	589	18	45	1.7	2.2	5
19-219/R6C-AM1N2VY/3T	1.6x0.8x0.2	● Brilliant Red	617.5~633.5	18	45	1.7	2.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0805



UNIT : mm

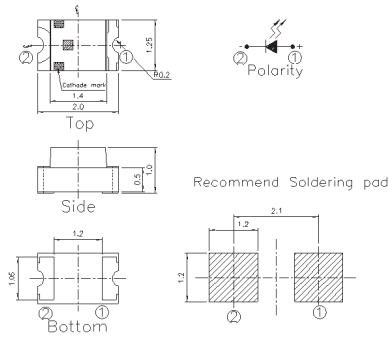


Product	Size (LxWxHmm)	Color		I _v		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.	V _F (V) min.	V _F (V) max.	
17-21/BHC-AP1Q2/3T	2.0x1.25x1	● Blue	470	45	112	2.7 / 3.3	3.7	20
17-21/BHC-XLMJY/3T	2.0x1.25x1	● Blue	470	11.5	28.5	2.7	3.1	5
17-21/G6C-AP1Q1B/3T	2.0x1.25x1	● Brilliant Yellow Green	573	45	90	1.75	2.35	20
17-21/G6C-FM1N2B/3T	2.0x1.25x1	● Brilliant Yellow Green	573	18	45	1.75	2.35	20
17-21/GHC-XS1T2M/3T	2.0x1.25x1	● Brilliant Green	525	180	450	2.75	3.95	20
17-21/GHC-YR1S2/3T	2.0x1.25x1	● Brilliant Green	525	112	285	3.5	4	20
17-21/GPC-AK0M1B/3T	2.0x1.25x1	● Green	562	7.2	22.5	1.75	2.35	20
17-21/GVC-AMPB/3T	2.0x1.25x1	● Green	565	18	72	1.75	2.35	20
17-21/R6C-AN2Q1B/3T	2.0x1.25x1	● Brilliant Red	624	36	90	1.75	2.35	20
17-21/R6C-AP1Q2L/3T	2.0x1.25x1	● Brilliant Red	624	45	112	1.7	2.3	20
17-21/R7C-AN2Q1B/3T	2.0x1.25x1	● Deep Red	631	36	90	1.75	2.35	20
17-21/S2C-AP1Q2B/3T	2.0x1.25x1	● Brilliant Orange	605	45	112	1.75	2.35	20
17-21/T1D-CP2R1TY/3T	2.0x1.25x1	○ Pure White	x=0.274, y=0.226	57	140	2.6	3	5
17-21/T1D-KQ1R2B5Y/3T	2.0x1.25x1	○ Pure White	x=0.294, y=0.254	72	180	2.7	3.1	5
17-21/Y2C-AN1P2/3T	2.0x1.25x1	● Brilliant Yellow	589	28.5	72	1.7 / 2	2.4	20
17-21/Y2C-CP2Q2B/3T	2.0x1.25x1	● Brilliant Yellow	589	57	112	1.75	2.35	20

SMD LED | Surface Mount Chip LED (PCB) | Top View 0805




UNIT : mm

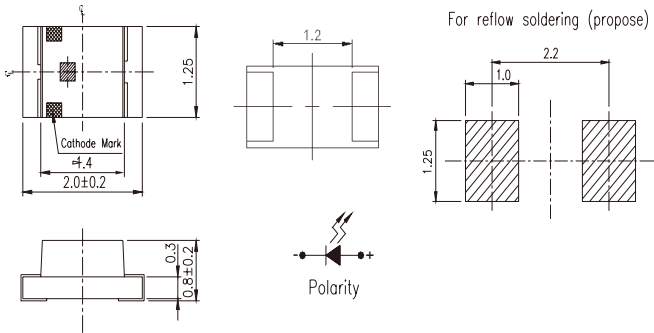


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
17-215/B6C-YP2RN/3T	2.0x1.25x0.8	Blue	470	57	180	2.7	3.7	20
17-215/BHC-AP1Q2/3T	2.0x1.25x0.8	Blue	470	45	112	2.7 / 3.3	3.7	20
17-215/G6C-BM1N2L/3T	2.0x1.25x0.8	Brilliant Yellow Green	573	18	45	1.7	2.3	20
17-215/G6C-FN2P2B/3T	2.0x1.25x0.8	Brilliant Yellow Green	573	36	72	1.75	2.35	20
17-215/R6C-AQ1R2B/3T	2.0x1.25x0.8	Brilliant Red	624	72	180	1.75	2.35	20
17-215/S2C-AQ1R2B/3T	2.0x1.25x0.8	Brilliant Orange	605	72	180	1.75	2.35	20

SMD LED | Surface Mount Chip LED (PCB) | Top View 1206

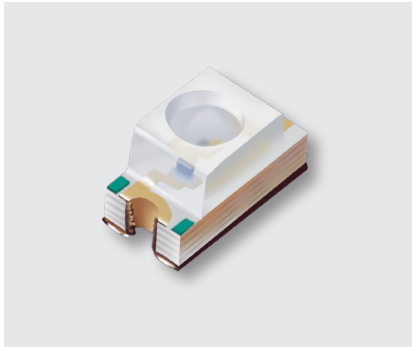

UNIT : mm

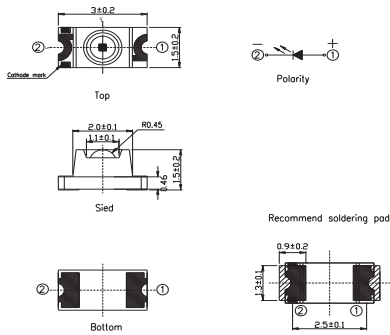


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
11-21/R6C-AR2S2B/2T	3.0x1.5x1.5	Brilliant Red	617.5-633.5	140	—	285	1.75	—	2.35	20
11-21/G6C-AR2S2B/2T	3.0x1.5x1.5	Brilliant Yellow Green	569.5-577.5	140	—	285	1.75	—	2.35	20
11-21/BHC-AQ2S2/2T	3.0x1.5x1.5	Blue	464.5-476.5	90	—	285	2.7	3.3	3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 1206




UNIT : mm

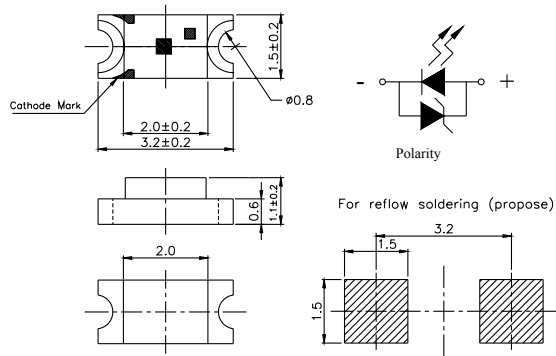

Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
15-11/BHC-ZL2N1QY/2T	3.2x1.5x1.0	● Blue	470	14.5	—	36	2.7	—	3.2	5
15-11/T1D-AQRHY/2T	3.2x1.5x1.0	○ Pure White	x=0.274, y=0.226	72	—	180	2.7	—	3.15	5



UNIT : mm

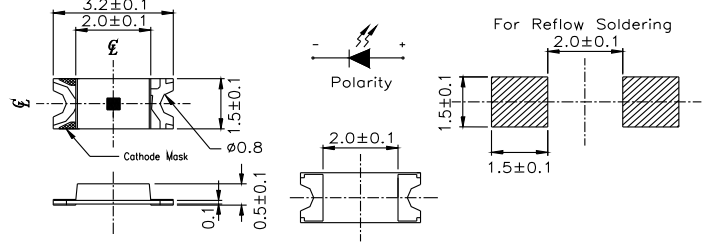


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
15-215/G7C-BN1P2B/2T	3.2x1.5x0.5	● Brilliant Yellow Green	573	28.5	72	1.75	2.35	20
15-215/R6C-AM2P1VY/2T	3.2x1.5x0.5	● Brilliant Red	624	22.5	57	1.7	2.2	5
15-215/R6C-AQ1R2L/2T	3.2x1.5x0.5	● Brilliant Red	624	72	180	1.7	2.3	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 1206





UNIT : mm

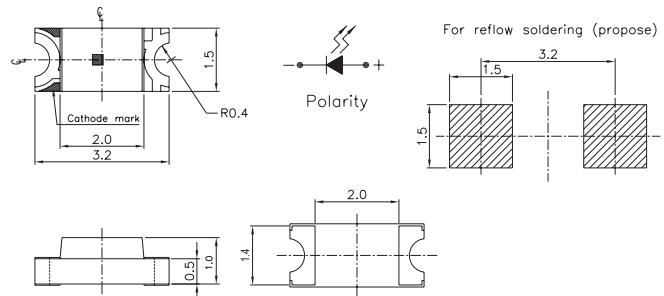



Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
15-21/B6C-YR1S2B2/2T	3.2x1.5x1.0	● Blue	470	112	285	2.9	3.6	20
15-21/BHC-AN1P2/2T	3.2x1.5x1.0	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
15-21/G6C-FM1N2B/2T	3.2x1.5x1.0	● Brilliant Yellow Green	573	18	45	1.75	2.35	20
15-21/G6C-FP1Q1L/2T	3.2x1.5x1.0	● Brilliant Yellow Green	573	45	90	1.7	2.3	20
15-21/GHC-XS1T1/2T	3.2x1.5x1.0	● Brilliant Green	525	180	360	2.7 / 3.3	3.7	20
15-21/GHC-YR2U1/3T	3.2x1.5x1.0	● Brilliant Green	525	140	565	2.7 / 3.3	3.7	20
15-21/R6C-AN1P2/2T	3.2x1.5x1.0	● Brilliant Red	624	28.5	72	1.7 / 2	2.4	20
15-21/R6C-FQ1R1B/2T	3.2x1.5x1.0	● Brilliant Red	624	72	140	1.75	2.35	20
15-21/S2C-AQ2R2B/2T	3.2x1.5x1.0	● Brilliant Orange	605	90	180	1.75	2.35	20
15-21/S3C-AP1Q2/2T	3.2x1.5x1.0	● Reddish Orange	615	45	112	1.7 / 2.0	2.4	20
15-21/T1D-CP1Q2TY/2T	3.2x1.5x1.0	○ Pure White	x=0.274, y=0.226	45	112	2.6	3	5
15-21/T7D-JQ2S1PY/2T	3.2x1.5x1.0	○ Pure White	x=0.274, y=0.226	90	225	2.7	3.3	5
15-21/Y2C-AP1QB/2T	3.2x1.5x1.0	● Brilliant Yellow	589	45	90	1.75	2.35	20
15-21/Y2C-CP1Q2B/2T	3.2x1.5x1.0	● Brilliant Yellow	589	45	112	1.75	2.35	20

SMD LED | Surface Mount Chip LED (PCB) | Top View LED

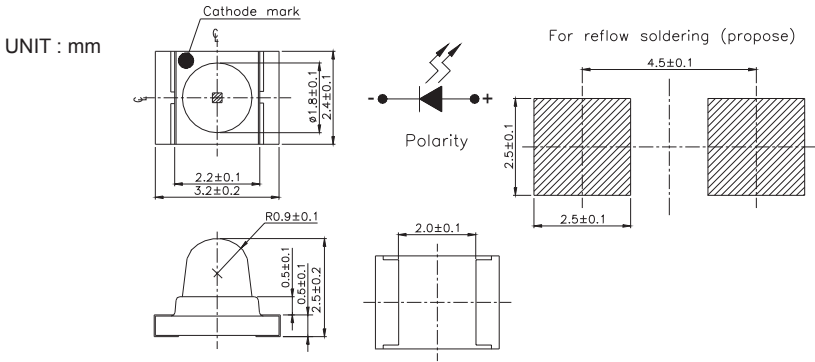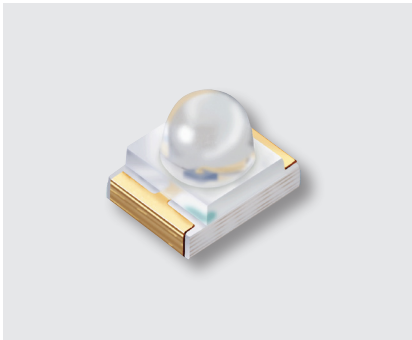

Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
42-21/BHC-AUW/1T	3.2x2.4x2.5	● Blue	470	450	—	1800	2.7	3.3	3.7	20
42-21SURC/S530-A4/TR8	3.2x2.4x2.5	● Brilliant Red	624	316	470	—	1.7	2.0	2.4	20
42-21UYC/S530-A2/TR8	3.2x2.4x2.5	● Brilliant Yellow	589	99	247	—	1.7	2.0	2.4	20
42-21SYGC/S530-E2/TR8	3.2x2.4x2.5	● Brilliant Yellow Green	573	230	460	—	1.7	2.0	2.4	20
42-21A/BHC-ZV1W2N/1T	3.2x2.4x2.5	● Blue	470	715	—	1800	2.65	—	3.75	20
42-21A/Y2C-ATW/1T	3.2x2.4x2.5	● Brilliant Yellow	585.5-594.5	285	—	1800	1.7	2.0	2.4	20

SMD LED | Surface Mount Chip LED (PCB) | Top View Bi-Color

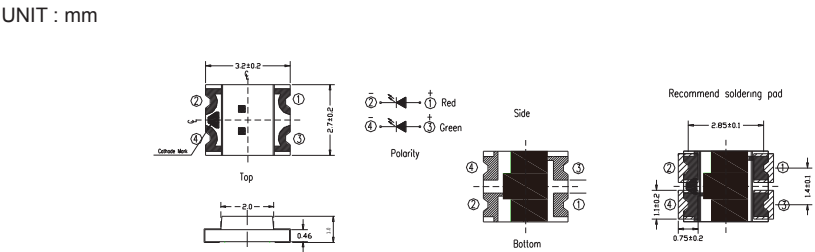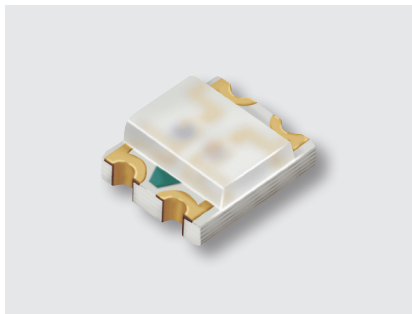


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
15-22/R6G6C-A32/2T	3.2x2.7x1.1	● Brilliant Red ● Brilliant Yellow Green	R6:624 G6:573	R6:45 G6:28.5	-	R6:112 G6:72	R6:1.7 G6:1.7	R6:2 G6:2	R6:2.4 G6:2.4	R6:20 G6:20
15-22/R8T1D-D30/2T	3.2x2.7x1.1	● Deep Red ○ Pure White	R8:629.5 T1:-----	R8:4.5 T1:36	-	R8:11.5 T1:90	R8:1.75 T1:2.5	-	R8:2.35 T1:3.5	R8:2 T1:2
15-22/BHG6C-A31/2T	3.2x2.7x1.1	● Blue ● Brilliant Yellow Green	BH:467.5 GH:569.5	BH:45 GH:28.5	-	BH:112 GH:72	BH:2.7 GH:1.7	BH:3.3 GH:2.0	BH:3.7 GH:2.4	20

SMD LED | Surface Mount Chip LED (PCB) | Top View Bi-Color




UNIT : mm

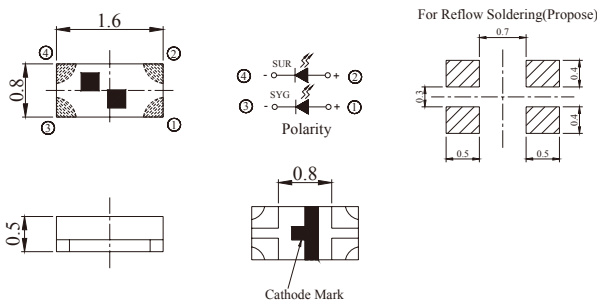

Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
18-225/B6R6C-C01/3T	1.6x0.8x0.5	● Blue ● Brilliant Red	B6 : 470 R6 : 624	B6 : 18 / 28.5 R6 : 18 / 28.5	-	B6 : 2.7 / 3.3 R6 : 1.7 / 2.0	B6 : 3.7 R6 : 2.4	5
18-225/R6G6C-A01/3T	1.6x0.8x0.5	● Brilliant Red ● Brilliant Yellow Green	R6 : 624 G6 : 573	R6 : 45 G6 : 28.5	R6 : 112 G6 : 72	R6 : 1.7 / 2 G6 : 1.7 / 2	R6 : 2.4 G6 : 2.4	20
18-225/S2G6C-A01/3T	1.6x0.8x0.5	● Brilliant Orange ● Brilliant Yellow Green	S2 : 605 G6 : 573	S2 : 32 / 48 G6 : 16 / 24	-	S2 : 1.7 / 2 G6 : 1.7 / 2	S2 : 2.4 G6 : 2.4	20




UNIT : mm

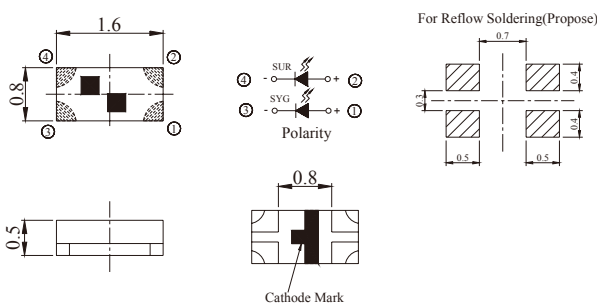


Product	Size (LxWxHmm)	Color		I _V		V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
18-225A/R6GHW-B01/3T	1.6x0.8x0.5	● Brilliant Red ● Brilliant Green	R6:624 GH:525	R6:28.5 GH:72	R6:72 GH:180	R6:1.7 GH:2.7	R6:2 GH:3.3	R6:2.4 GH:3.7	10

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Bi-Color

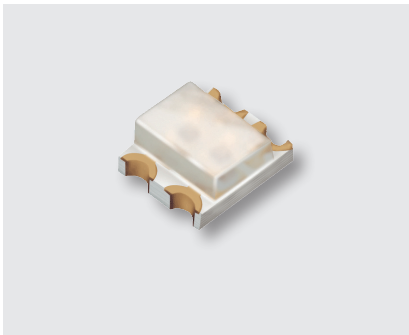


UNIT : mm

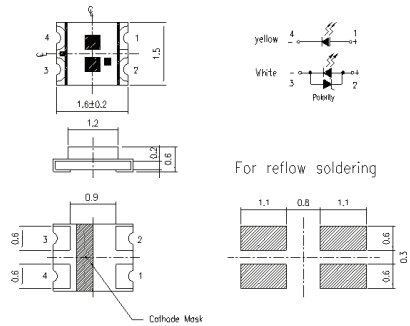

Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
19-123/R6GHC-D01/2T	1.6x1.5x0.6	● Brilliant Red ● Brilliant Green	R6:617.5-633.5 GH:520-535	R6:9 GH:18.5	R6:22.5 GH:45	R6:1.55 GH:2.35	R6:2.15 GH:3.05	2



UNIT : mm

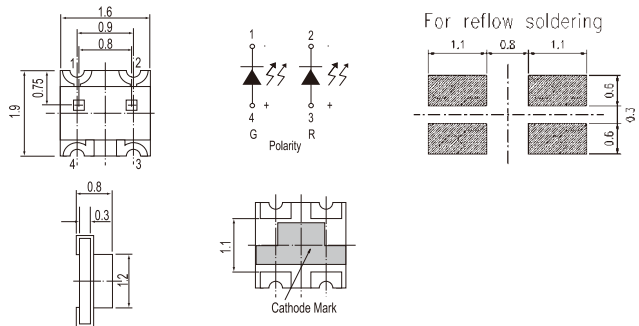


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
19-22/G6R6C-A31/2T	1.9x1.6x0.8	● Brilliant Yellow Green ● Brilliant Red	G6 : 573 R6 : 624	G6 : 22.5 R6 : 45	G6 : 57 R6 : 90	G6 : 1.7 / 2 R6 : 1.7 / 2	G6 : 2.4 R6 : 2.4	20
19-22/R6BHC-B01/2T	1.9x1.6x0.8	● Brilliant Red ● Blue	R6 : 624 BH : 470	R6 : 14.5 / 20 BH : 14.5 / 20	--	R6 : 1.9 BH : 2.9	R6 : 2.3 BH : 3.3	10
19-22/R6GHC-C02/2T	1.9x1.6x0.8	● Brilliant Red ● Brilliant Green	R6 : 624 GH : 525	R6 : 14.5 / 20 GH : 45 / 65	--	R6 : 1.9 GH : 2.9	R6 : 2.3 GH : 3.4	5
19-22/Y2G6C-A14/2T	1.9x1.6x0.8	● Brilliant Yellow ● Brilliant Yellow Green	Y2 : 589 G6 : 573	Y2 : 45 G6 : 28.5	Y2 : 112 G6 : 72	Y2 : 1.7 / 2 G6 : 1.7 / 2	Y2 : 2.4 G6 : 2.4	20

SMD LED | Surface Mount Chip LED (PCB) | Top View Bi-Color




UNIT : mm


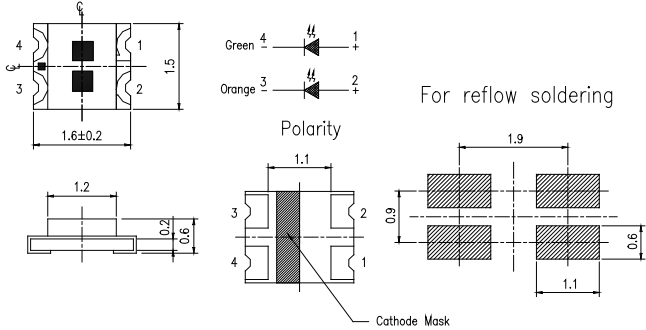


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
19-223/G6S2C-A01/2T	1.6x1.5x0.6	● Brilliant Yellow Green ● Brilliant Orange	G6 : 573 S2 : 605	G6 : 30 S2 : 90	G6 : 60 S2 : 180	G6 : 2 S2 : 2	G6 : 2.4 S2 : 2.4	20
19-223/R6BHC-A05/2T	1.6x1.5x0.6	● Brilliant Red ● Blue	R6 : 624 BH : 470	R6 : 72 BH : 36	R6 : 180 BH : 72	R6 : 1.7 / 2 BH : 2.7 / 3.3	R6 : 2.4 BH : 3.7	20
19-223/R6G6C-A01/2T	1.6x1.5x0.6	● Brilliant Red ● Brilliant Yellow Green	R6 : 624 G6 : 573	R6 : 72 G6 : 22.5	R6 : 180 G6 : 57	R6 : 1.7 / 2 G6 : 1.7 / 2	R6 : 2.4 G6 : 2.4	20
19-223/R7BHC-A30/2T	1.6x1.5x0.6	● Dark Red ● Blue	R7 : 631 BH : 470	R7 : 45 BH : 36	R7 : 112 BH : 90	R7 : 1.7 / 2 BH : 2.7 / 3.3	R7 : 2.4 BH : 2.7 / 3.7	20
19-223/R7G6C-A01/2T	1.6x1.5x0.6	● Dark Red ● Brilliant Yellow Green	R7 : 631 G6 : 573	R7 : 18 G6 : 18	R7 : 72 G6 : 72	R7 : 2 G6 : 2	R7 : 2.4 G6 : 2.4	20
19-223/S2BHC-A01/2T	1.6x1.5x0.6	● Brilliant Orange ● Blue	S2 : 605 BH : 470	S2 : 72 BH : 36	S2 : 140 BH : 72	S2 : 1.7 / 2 BH : 3	S2 : 2.4 BH : 3.5	20
19-223/S2T1D-C30/2T	1.6x1.5x0.6	● Brilliant Orange ○ Pure White	S2 : 605 x=0.274, y=0.226	S2 : 18 T1 : 45	S2 : 45 T1 : 112	S2 : 1.55 T1 : 2.7	S2 : 2.15 T1 : 3.3	5
19-223/Y2G6C-A01/2T	1.6x1.5x0.6	● Brilliant Yellow ● Brilliant Yellow Green	Y2 : 589 G6 : 573	Y2 : 36 G6 : 28.5	Y2 : 72 G6 : 57	Y2 : 1.7 / 2 G6 : 1.7 / 2	Y2 : 2.4 G6 : 2.4	20



SMD LED | Surface Mount Chip LED (PCB) | Top View Full Color

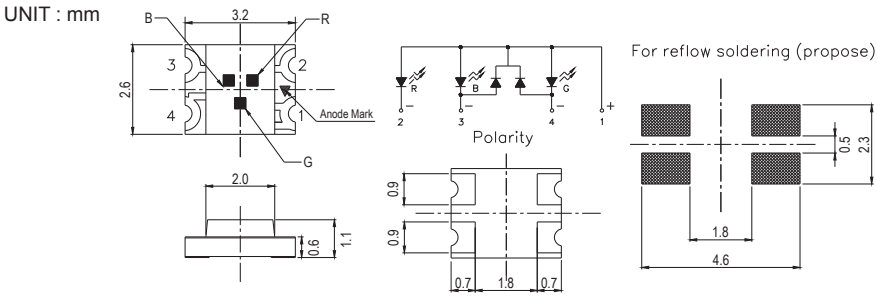

Product	Size (LxWxHmm)	Color		I _V		V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
15-13D/R6GHBHC-A01/2T	3.2x2.6x1.1	● Brilliant Red ● Brilliant Green ● Blue	R6 : 624 GH : 525 BH : 470	R:90 G:112 B:45	R:140 G:180 B:70	R:1.7 G:2.7 B:2.7	R:2 G:3.3 B:3.3	R:2.4 G:3.7 B:3.7	20

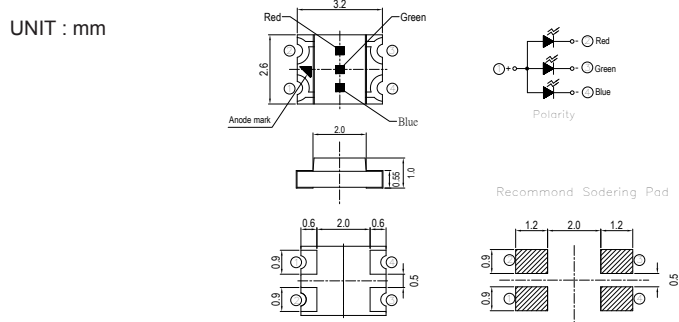
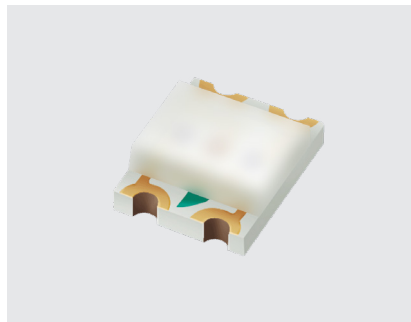


Product	Size (LxWxHmm)	Color		I _V		V _F	IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	V _F (V) min.		
15-23B/R6GHBHC-A01/2T	3.2 x 2.6 x 1.1	● Brilliant Red ● Brilliant Green ● Blue	R6 : 624 GH : 525 BH : 470	R:90 G:112 B:45	R:140 G:180 B:70	R:1.7 G:2.7 B:2.7	20	120

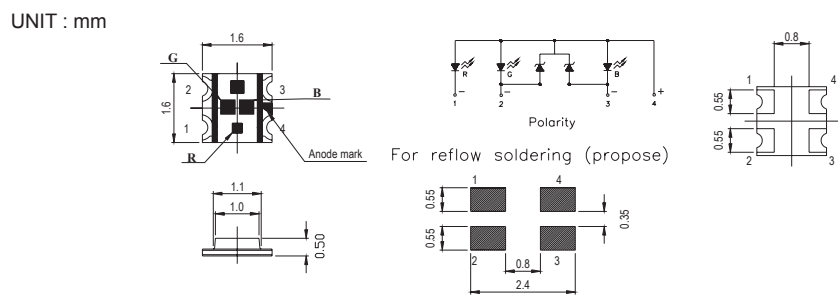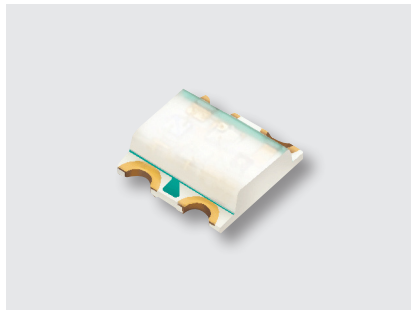


Product	Size (LxWxHmm)	Color		I _V	V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	V _F (V) min.	V _F (V) max.	
19-137/R6GHBHC-A01/2T	1.6x1.6x0.5	● Brilliant Red ● Brilliant Green ● Blue	R6 : 624 GH : 525 BH : 470	R6 : 72 / 100 GH : 112 / 180 BH : 28.5 / 50	R6 : 1.7 / 2 GH : 2.7 / 3.3 BH : 2.7 / 3.3	R6 : 2.4 GH : 3.7 BH : 3.7	20


SMD LED | Surface Mount Chip LED (PCB) | Top View Full Color

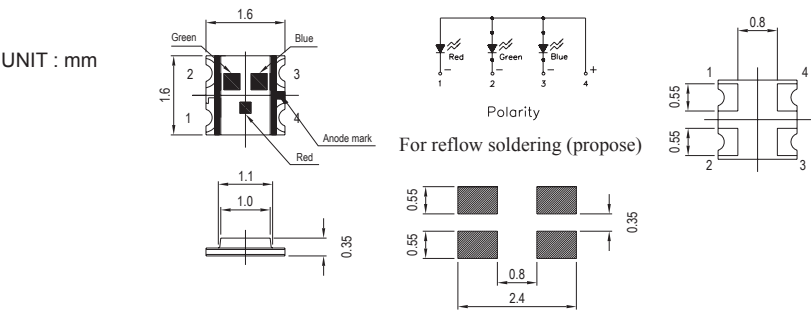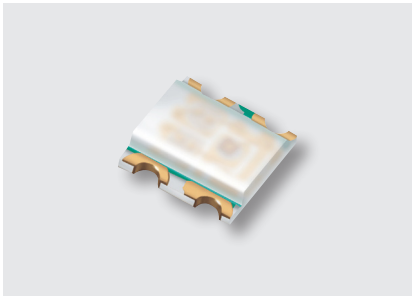

Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (max) min.	V _F (V) min.	V _F (V) max.	
19-237/R6GHBHC-A04/2T	1.6x1.6x0.35	● Brilliant Red ● Brilliant Green ● Blue	R6 : 613-627 GH : 520-530 BH : 465-475	R6 : 18 GH : 28.5 BH : 11.5	R6 : 57 GH : 112 BH : 28.5	R6 : 1.7 GH : 2.6 BH : 2.6	R6 : 2.2 GH : 3 BH : 3	5

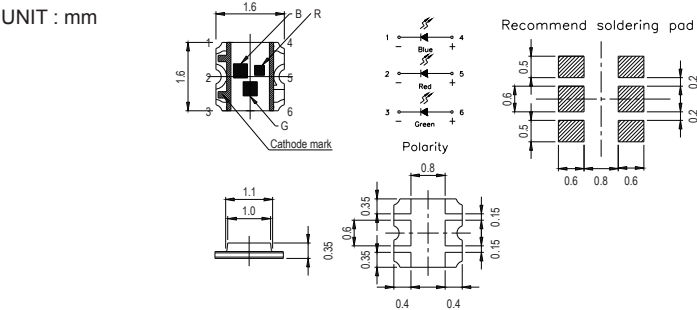

Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
19-337/R6GHBHC-A01/2T	1.6x1.6x0.35	● Brilliant Red ● Brilliant Green ● Blue	R6 : 614 GH : 520 BH : 465	R6 : 72 GH : 180 BH : 36	R6 : 225 GH : 360 BH : 90	R6 : 1.7 GH : 2.7 BH : 2.7	R6 : 2.4 GH : 3.8 BH : 3.8	20

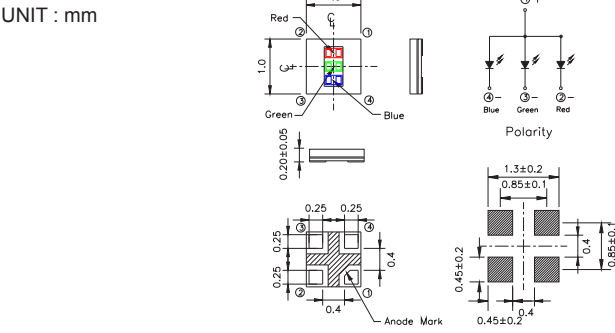


Product	Size (LxWxHmm)	Color		I _V		IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.		
B1010BWN3A1-GRBC0105-T	1.6x1.6x0.35	● Brilliant Red ● Brilliant Green ● Blue	G : 520~530 R : 617.5~625.5 B : 460~470	G : 285 R : 112 B : 468	G : 565 R : 225 B : 140	5	120

SMD LED

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Full Color



UNIT : mm

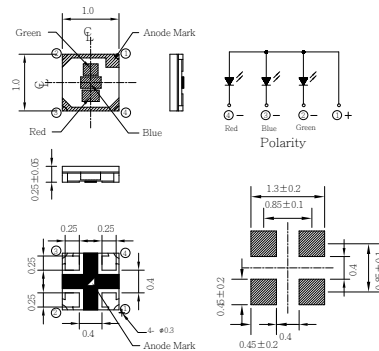


Product	Size (LxWxHmm)	Color		I _V		IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.		
18-239D/R6GHBHC-M01/2T	1.0 x 1.0 x 0.25	● Brilliant Red ● Brilliant Green ● Blue	R6 : 624 GH : 525 BH : 470	45	112	R6:0.9 GH:2 BH:0.65	120
18-239D/R6GHBHC-D01/2T	1.0 x 1.0 x 0.25	● Brilliant Red ● Brilliant Green ● Blue	R6: 618~628 GH: 524~538 BH:465~475	R6:25 GH:35 BH:17	R6:45 GH:65 BH:28	2	

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)




UNIT : mm

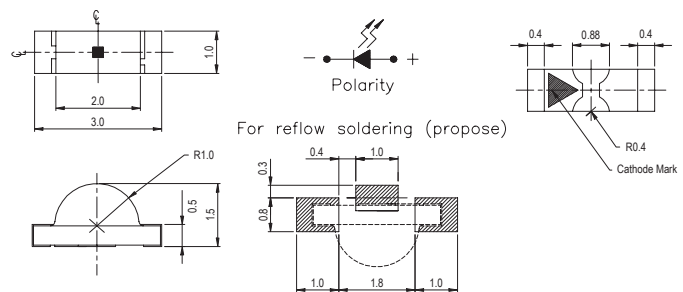


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
12-21C/BHC-AN1P2/2C	3.0x1.5x1.0	● Blue	470	28.5	-	72	2.7 / 3.3	-	3.7	20
12-21C/R6C-AS1T1B/2C	3.0x1.5x1.0	● Brilliant Red	624	180	-	360	1.75	-	2.35	20
12-21C/G6C-BK1L2VY/2T	3.0x1.5x1.0	● Brilliant Yellow Green	575	7.2	-	18	1.7	-	2.2	5
12-21C/T3D-CP1Q2B12Y/2C	3.0x1.5x1.0	○ Pure White	x=0.274, y=0.226	45	-	112	2.7	-	3.4	5


SMD LED | Surface Mount Chip LED (PCB) | Side View (0.2T~1.0T)

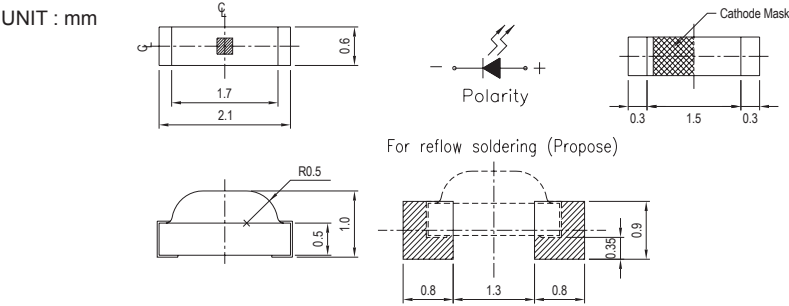

Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
12-215/R6C-AR1S1B/3C	2.1x1.0x0.6	● Brilliant Red	624	112	225	1.75	2.35	20
12-215/BHC-AP1Q2/3C	2.1x1.0x0.6	● Blue	470	45	112	2.7/3.3	3.7	20
12-215/G6C-BN2P2L/3C	2.1x1.0x0.6	● Brilliant Yellow Green	573	36	72	1.7	2.3	20
12-215/T1D-AQ2R1HY/3C	2.1x1.0x0.6	○ White	-	90	140	2.7	3.15	5

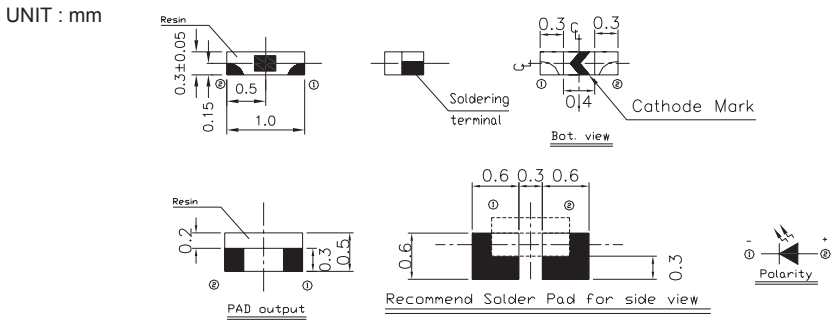



Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
16-916/T1D-AP1Q2QY/3T	1.0x0.5x0.3	○ Pure White	x=0.274 y=0.226	45	-	112	2.7	-	3.2	5

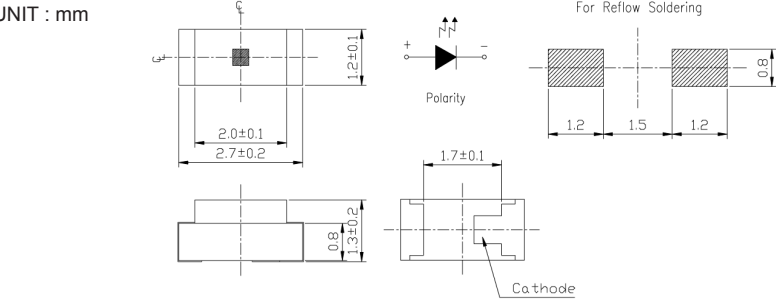



Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
22-21/GHC-YR1S2/2C	2.7x1.3x1.2	● Brilliant Green	525	112	-	285	2.7	3.3	3.7	20
22-21/Y2C-CP1Q1B/2C	2.7x1.3x1.2	● Brilliant Yellow	589	45	-	90	1.75	-	2.35	20
22-21/R6C-AJ2L1AX/2C	2.7x1.3x1.2	● Brilliant Red	624	5.8	-	14.5	1.55	-	2.15	2
22-21/BHC-AN1P2/2C	2.7x1.3x1.2	● Blue	470	28.5	-	72	3.8	-	4.5	20

SMD LED

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)

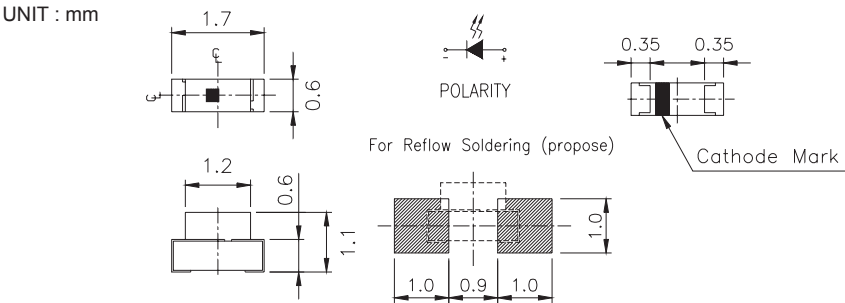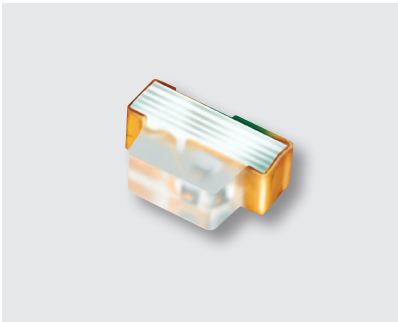

Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
27-21/BHC-AN1P2/3C	1.7x1.1x0.6	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
27-21/BHC-AP1Q2/3C	1.7x1.1x0.6	● Blue	470	45	112	2.7 / 3.3	3.7	20
27-21/GHC-YR1S2M/3C	1.7x1.1x0.6	● Brilliant Green	525	112	285	2.75	3.95	20
27-21/R6C-AP1Q2B/3C	1.7x1.1x0.6	● Brilliant Red	624	45	112	1.75	2.35	20
27-21/T3D-AP2Q2HY/3C	1.7x1.1x0.6	○ Pure White	x=0.274, y=0.226	57	112	2.7	3.15	5
27-21/Y2C-CPQB/3D	1.7x1.1x0.6	● Brilliant Yellow	589	45	112	1.75	2.35	20

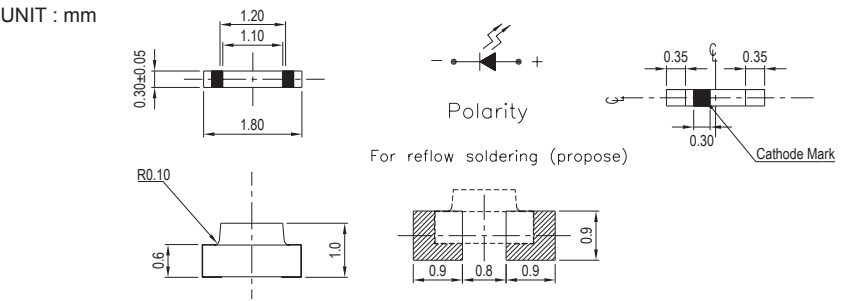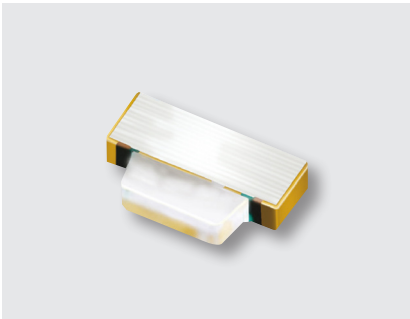


Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
48-213/BHC-ZM2P1QY/3C	1.8x1.0x0.3	● Blue	470	22.5	57	2.7	3.2	5
48-213/R6C-AM1N2VY/3C	1.8x1.0x0.3	● Brilliant Red	624	18	45	1.7	2.2	5
48-213/T7D-BQ1R2QY/3C	1.8x1.0x0.3	○ Pure White	x=0.274, y=0.226	72	180	2.7	3.2	5

SMD LED | Surface Mount Chip LED (PCB) | Side View Bi-Color




UNIT : mm

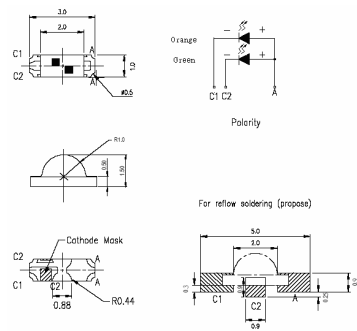

Product	Size (LxWxHmm)	Color		I _V		IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.		
12-22C/T3S2D-C35/2C	3.0x1.0x1.5	○ Pure White ● Brilliant Orange	S2:600~612 X: 0.274~0.314 Y: 0.226~0.315	T3: 45 S2: 14.5	T3: 112 S2: 36	5	130
12-22C/G6R6C-A30/2C		● Brilliant Yellow Green ● Brilliant Red	G6:569.5~577.5 R6:617.5~633.5	G6:28.5 R6: 45	G6: 72 R6: 112	20	120
12-22C/G6Y2C-A30/2C		● Brilliant Yellow Green ● Brilliant Orange	G6: 573 Y2: 589	G6: 36 Y2: 36	G6: 90 Y2: 90	20	100



UNIT : mm

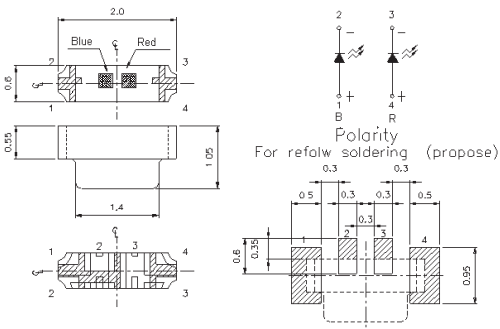


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
17-223/BHR7C-C30/3C	2.0x1.05x0.6	● Blue ● Dark Red	BH : 470 R7 : 631	BH :22.5 R7 :14.5	-	BH :57 R7 :36	BH :2.7 R7 :1.55	-	BH :3.2 R7 :2.15	5
17-223/R6G6C-D30/3C	2.0x1.05x0.6	● Brilliant Red ● Brilliant Yellow Green	R6:624 G6:573	R6:5.8 G6:2.3	-	R6:14.5 G6:5.8	R6:1.55 G6:1.55	-	R6:2.15 G6:2.15	2

SMD LED

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View Full Color




UNIT : mm

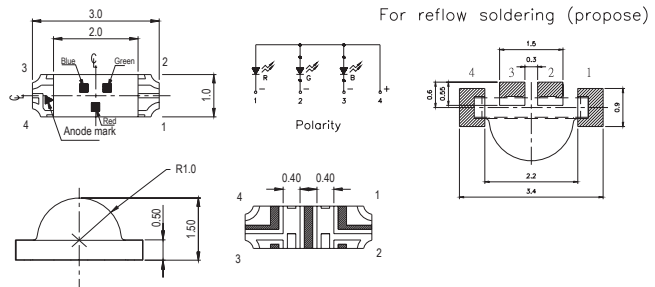

Product	Size (LxWxHmm)	Color		I _V		V _F		IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	V _F (V) typ.	V _F (V) max.	
12-23C/R6GHBHC-A01/2C	3.0x1.5x1.0	● Blue ● Brilliant Red ● Brilliant Green	BH : 470 R6 : 624 GH : 525	BH :32 R6 : 63 GH : 125	BH : 50 R6 : 90 GH : 180	BH : 3.3 R6 : 2 GH : 3.3	BH :3.9 R6 : 2.4 GH : 3.9	20
12-23C/S2GHBHC-A01/2C	3.0x1.5x1.0	● Brilliant Orange ● Brilliant Green ● Blue	S2 : 605 GH : 525 BH : 470	S2 : 72 GH : 140 BH : 36	S2 : 140 GH : 210 BH : 65	S2 : 2 GH : 3.3 BH : 3.3	S2 : 2.4 GH : 3.9 BH : 3.9	20




UNIT : mm




Product	Size (LxWxHmm)	Color		I _v		IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) max.		
22-23CRGBW/S757/TR8	2.7x1.35x1.0	● Blue ● Brilliant Red ● Brilliant Green	R: 613~625 G: 523~540 B: 465~475	R: 14.5 G: 35 B: 10	R: 36 G: 110 B: 24.5	5	120

SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount


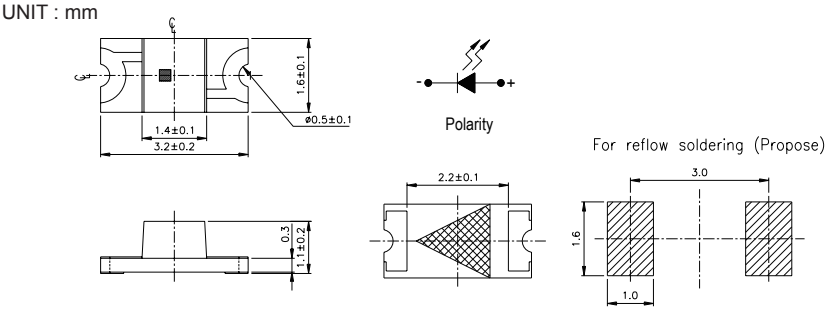


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
23-21/R6C-AM1N2AY/2A	3.2x1.6x1.1	● Brilliant Red	624	18	—	45	1.55	—	2.15	5
23-21/G6C-AL2N1/2A	3.2x1.6x1.1	● Brilliant Yellow Green	573	14.5	—	36	1.7	2.0	2.14	20
23-21/BHC-AM1N2TY/2A	3.2x1.6x1.1	● Blue	470	18	—	45	2.6	—	3	5


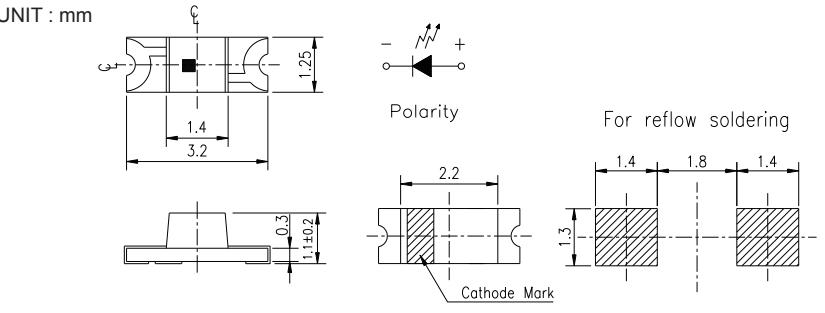


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
23-21B/G6C-AM2P1/2A	3.2x1.25x1.1	● Brilliant Yellow Green	573	22.5	—	57	1.7	2	2.4	20
23-21B/BHC-ZM1N2TY/2A	3.2x1.25x1.1	● Blue	470	18	—	45	2.6	—	3	5
23-21B/S2C-AP1Q2B/2A	3.2x1.25x1.1	● Brilliant Orange	605	455	—	112	1.75	—	2.35	20
23-21B/T1D-CP2Q2TY/2A	3.2x1.25x1.1	○ Pure White	X:0.274~0.314 Y:0.226~0.347	57	—	112	2.6	—	3	5


SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount

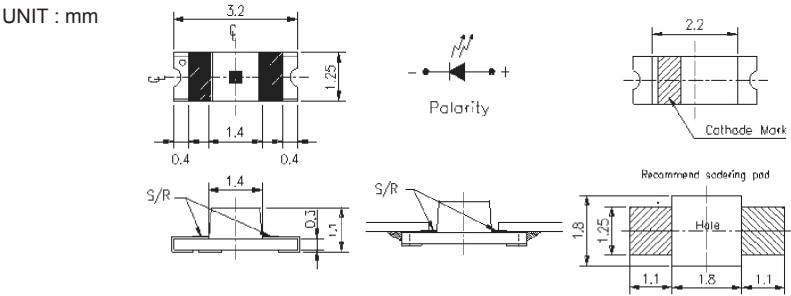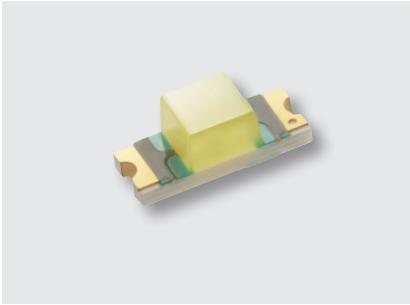

Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
23-21C/T1D-CP2Q2TY/2A	3.2x1.25x1.1	○ Pure White	x=0.274, y=0.226	57	—	112	2.6	—	3	5

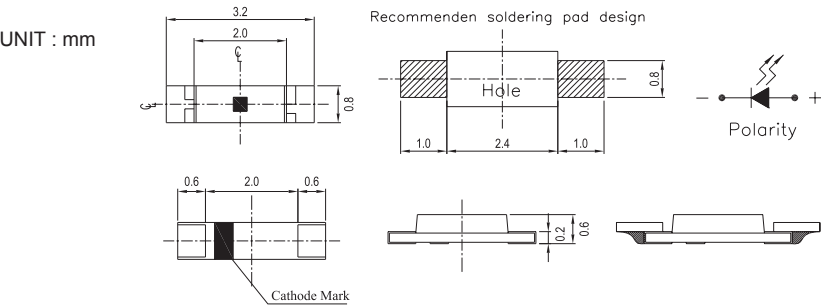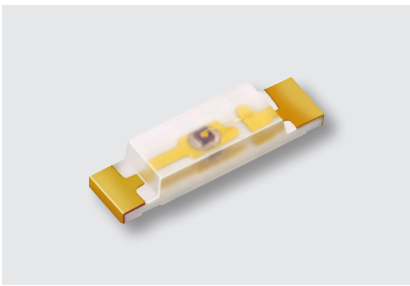

Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
23-215A/BHC-DN2P2E/5A	3.2x0.8x0.6	● Blue	470	36	—	90	2.75	—	3.65	20

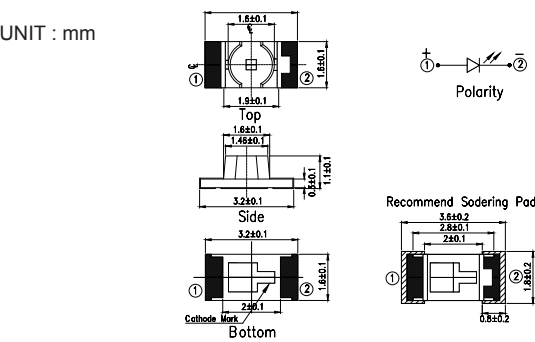


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
24-21/GHC-YR2U1/2A	3.2x1.6x1.1	● Brilliant Green	525	140	—	565	2.7	3.3	3.7	20
24-21/BHC-A1Q2/2A	3.2x1.6x1.1	● Blue	470	45	—	112	2.7	3.3	3.7	20

SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount




UNIT : mm

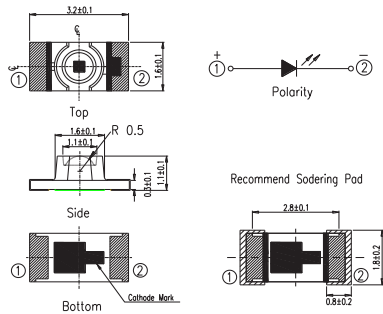


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
25-21/GHC-YSU/2A	3.2x1.6x1.1	● Brilliant Green	520	180	—	715	3.5	3.5	4.3	20
25-21/BHC-AR1S2E/2A	3.2x1.6x1.1	● Blue	470	112	—	285	2.75	—	3.65	20

SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount Bi-Color

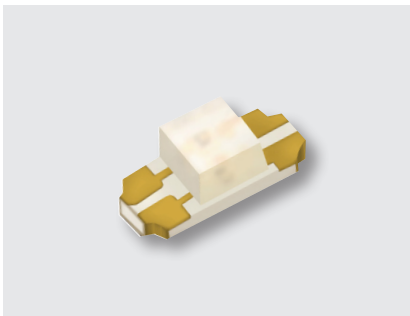

UNIT : mm

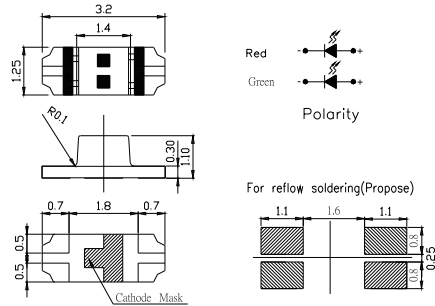


Product	Size (LxWxHmm)	Color		I _V			V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
23-22B/R7G6C-A30/2T	3.2x1.25x1.1	● Dark Red ● Brilliant Yellow Green	R7:631 G6:573	R7:18 G6:14.5	—	R7:72 G6:45	R7:1.7 G6:1.7	R7:2 G6:2	R7:2.4 G6:2.4	20
23-22B/R7G6C-A30/2A	3.2x1.25x1.1	● Dark Red ● Brilliant Yellow Green	R7:631 G6:573	R7:18 G6:14.5	—	R7:72 G6:45	R7:1.7 G6:1.7	R7:2 G6:2	R7:2.4 G6:2.4	20
23-22B/T3S2D-C30/2A	3.2x1.25x1.1	○ Pure White ● Brilliant Orange	T3: X:0.274 Y:0.226 S2:605	T3:45 S2:9	—	T3:112 S2:22.5	T3:2.5 S2:1.55	T3:3.1 S2:1.85	T3:3.5 S2:2.25	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Reverse Mount Bi-Color




UNIT : mm

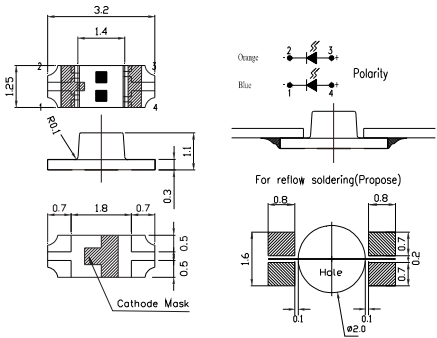


Product	Size (LxWxHmm)	Color		I _V		V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
23-22C/S2BHC-B30/2A	3.2x1.25x1.1	● Brilliant Orange ● Blue	S2 : 605 BH : 470	22.5	57	S2 : 1.7 BH : 2.7	S2 : 2 BH : 3.3	S2 : 2.4 BH : 3.7	10

SMD LED ■ Surface Mount Chip LED (PCB) ■ Reverse Mount Full Color

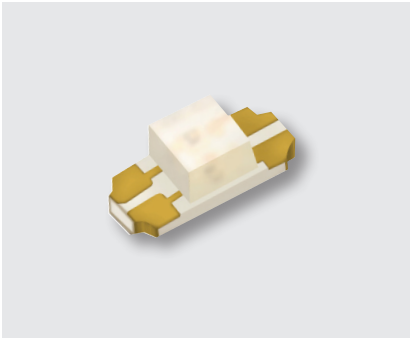

UNIT : mm

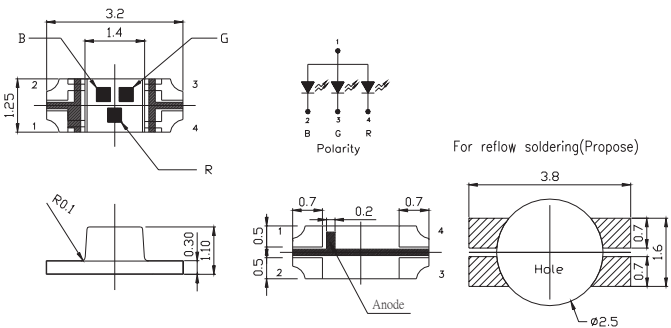


Product	Size (LxWxHmm)	Color		I _V		V _F			IF (mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
23-23B/R6GHBHC-A01/2A	3.2x1.25x1.1	● Brilliant Red ● Brilliant Green ● Blue	R6 : 624 GH : 525 BH : 470	R6 : 72 GH : 140 BH : 45	R6 : 100 GH : 200 BH : 65	R6 : 1.7 GH : 2.7 BH : 2.7	R6 : 2 GH : 3.3 BH : 3.3	R6 : 2.4 GH : 3.7 BH : 3.7	20

SMD LED | Surface Mount Chip LED (PCB) | Top View Double Molding 1609



UNIT : mm




Product	Size (LxWxHmm)	Color	I _V		V _F		IF(mA)	Viewing Angle(°)
			I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.		
B1609FBCN1-OC60610022405-3T	1.6x0.9x0.7	● Brilliant Orange	18	45	1.7	2.4	5	50
B1609FBCZ1-WP2329023005-3T	1.6x0.9x0.7	○ Pure White	14.5	36	2.6	3	5	50
B1609FBCN1-PGC5556032205-3T	1.6x0.9x0.7	● Pure Green	2.8	9	1.6	2.2	5	50

SMD LED | Surface Mount CSP | CSP0603




UNIT : mm




Product	Size (LxWxHmm)	Color	I _V			V _F			IF (mA)	Viewing Angle(°)
			I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
CSP0603AN101-WP30300563001-3T	0.6x0.3x0.15	○ White	56	80	140	2.4	2.6	3	1	150
CSP0603AN101-RP61630902505-3T	0.6x0.3x0.15	● Brilliant Red	90	155	224	1.5	1.86	2.5	5	130
CSP0603AN101-GP52543552705-3T	0.6x0.3x0.15	● Pure Green	355	554	900	2.1	2.4	2.7	5	150
CSP0603AN101-BP44460093001-3T	0.6x0.3x0.15	● Blue	9	13.3	18	2.4	2.6	3	1	150
CSP0603AN101-YP58600283001-3T	0.6x0.3x0.18	● Amber	28	48	71	2.4	2.6	3	1	150

SMD LED | Surface Mount CSP | CSP1005

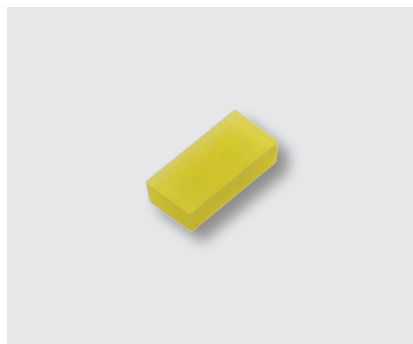

UNIT : mm




Product	Size (LxWxHmm)	Color	I _V			V _F			IF (mA)	Viewing Angle(°)
			I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
CSP1005BN101-WP35403553005-3T	1.0x0.5x0.27	○ White	355	450	900	2.4	2.65	3	5	150
CSP1005BN101-BP44460563140-3T	1.0x0.5x0.27	● Blue	560	750	1120	2.5	2.8	3.1	40	150

SMD LED | Surface Mount CSP | CSP0806



UNIT : mm

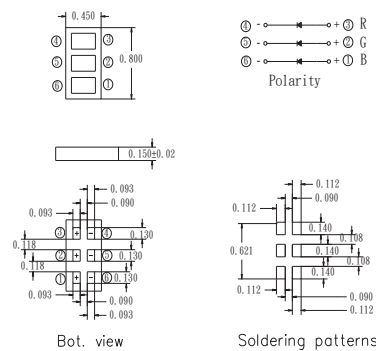


Product	Size (LxWxHmm)	Color		I _V			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.		
CSP0806AN301-RGBC0101-T	0.85x0.65x0.15	● Brilliant Red ● Brilliant Green ● Blue	R:617~627 G:525~535 B:469~479	R:40 G:160 B:25	R:60 G:200 B:50	R:70 G:260 B:60	1.7	150

LED Lamps | 3mm Round Type




UNIT : mm

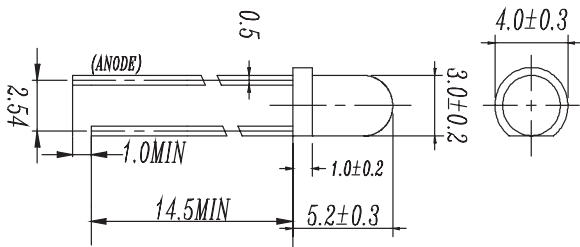


Product	Dimension (mm)	Color		I _v			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
204-10SDRD/S530-A3	3	● Brilliant Red	639	40	80	-	1.7	2	2.4	20	50
204-10SUBC/S400-A4	3	● Blue	470	400	800	-	-	3.4	4	20	20
204-10SUBD/S400-A4	3	● Blue	470	160	320	-	2.7	3.3	3.7	20	30
204-10SUGC/S400-A5	3	● Green	525	1600	3200	-	-	3.2	3.7	20	30
204-10SURD/S530-A3	3	● Brilliant Red	624	40	80	-	1.7	2	2.4	20	45
204-10SURD/S530-A3-L	3	● Brilliant Red	624	40	80	-	1.7	2	2.4	20	45
204-10SURT/S530-A3	3	● Brilliant Red	624	250	500	-	1.7	2	2.4	20	20
204-10SYGC/S530-E2	3	● Brilliant Yellow Green	573	125	250	-	1.7	2	2.4	20	20
204-10SYGD/S530-E3	3	● Brilliant Yellow Green	573	63	100	-	1.7	2	2.4	20	45
204-10UYD/S530-A3	3	● Brilliant Yellow	589	100	200	-	1.7	2	2.4	20	40
204-10UYOC/S530-A3	3	● Brilliant Orange	605	320	500	-	1.7	2	2.4	20	30
204-15/FNC2-2TVA	3	○ White	x=0.26 y=0.27	7150	-	14250	2.8	-	3.6	20	25
204-15UTC/S400-X9	3	○ White	x=0.26 y=0.27"	7150	-	14250	2.8	-	3.6	20	25

LED Lamps | 3mm Round Type

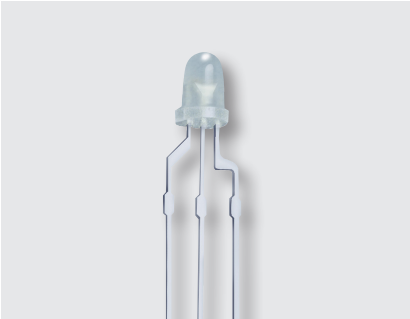


UNIT : mm

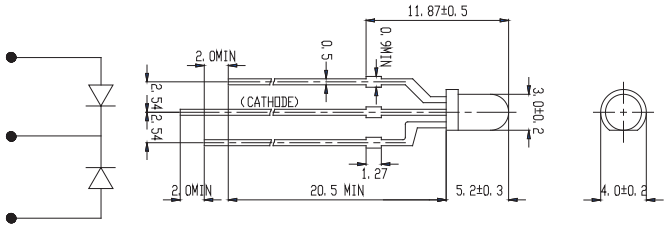

Product	Dimension (mm)	Color		I _V		V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
209-3SURYSGW/S530-A3	3	● Brilliant Red ● Brilliant Yellow Green	R:624 G:573	25 / 10	50 / 20	1.7	2.0	2.4	20	80
209SDRSYSGW/S530-A3	3	● Deep Red ● Brilliant Yellow Green	R:639 G:573	25 / 16	50 / 32	1.7	2.0	2.4	20	80
209SURYSGC/S530-A3	3	● Brilliant Red ● Brilliant Yellow Green	R:624 G:573	63 / 40	125 / 80	1.7	2.0	2.4	20	60
209UYOSUGC/S530-A3	3	● Brilliant Yellow ● Green	G:589 G:525	100 / 160	200 / 320	1.7 / 2.7	2.0 / 3.3	2.4 / 3.7	20	50



UNIT : mm

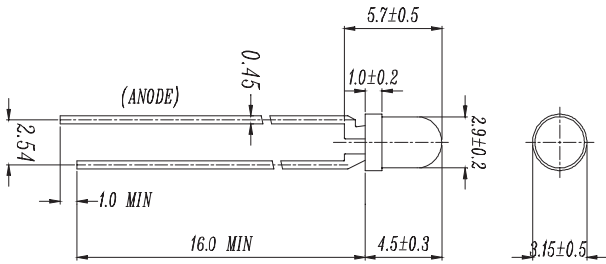


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
264-7SDRC/S530-A3	3	● Deep Red	639	40	100	-	1.7	2	2.4	20	40
264-7SUGC/S400-A4	3	● Brilliant Green	530	630	1250	-	2.7	3.3	3.7	20	30
264-7SUGC/S400-A5	3	● Brilliant Green	530	1000	2000	-	-	3.4	4	20	30
264-7SURC/S400-A8	3	● Brilliant Red	624	400	800	-	1.7	2	2.4	20	40
264-7SURD/S530-A3	3	● Brilliant Red	624	63	125	-	1.7	2	2.4	20	60
264-7SYGC/S530-E3	3	● Brilliant Yellow Green	573	100	320	-	1.7	2	2.4	20	35
264-7SYGD/S530-E2	3	● Brilliant Yellow Green	573	25	50	-	-	2	2.4	20	60
264-7UYC/S400-A9	3	● Brilliant Yellow	589	630	1250	-	1.7	2	2.4	20	40
264-7UYD/S530-A3	3	● Brilliant Yellow	589	63	125	-	1.7	2	2.4	20	60


LED Lamps ■ 3mm Round Type




UNIT : mm

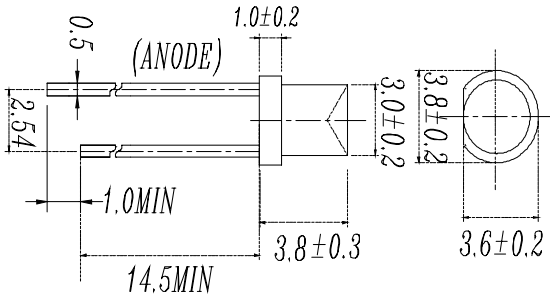

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
484-10SURT/S530-A3	3	● Brilliant Red	624	10	20	-	1.7	2	2.4	20	130
484-10SYGT/S530-E2	3	● Brilliant Yellow Green	573	6.3	12.5	-	1.7	2	2.4	20	80
484-10UYOC/S530-A3	3	● Brilliant Orange	605	40	80	-	1.7	2	2.4	20	160
484-10UYT/S530-A3	3	● Brilliant Yellow	589	16	32	-	1.7	2	2.4	20	110

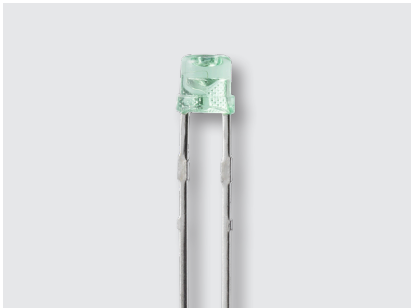

UNIT : mm

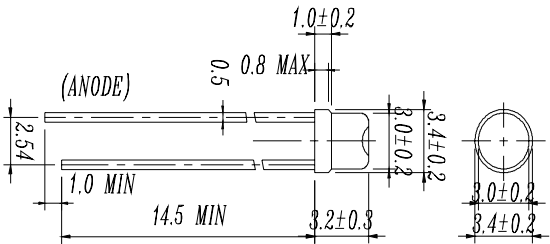


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
494-10SURT/S530-A3	3	● Brilliant Red	624	16	32	-	1.7	2.0	2.4	20	100
494-10SYGT/S530-E2	3	● Brilliant Yellow Green	573	10	20	-	1.7	2.0	2.4	20	100
494SUBC/C470/S400-A4	3	● Blue	470	20	32	-	2.7	3.3	3.7	20	100

LED Lamps | 3mm Round Type




UNIT : mm

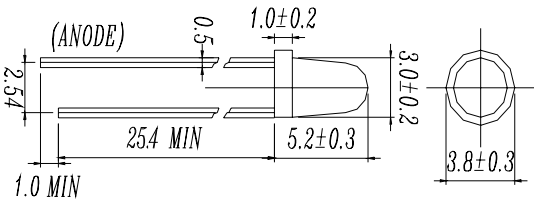

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
1224-10SURC/S530-A3	3	● Brilliant Red	624	160	400	-	1.7	2	2.4	20	20
1224SDRC/S530-A4	3	● Deep Red	639	250	500	-	-	2	2.4	20	25
1224SUBC/C470/S400-A4	3	● Blue	470	250	500	-	2.7	3.3	3.7	20	30
1224SUGC/S400-A5	3	● Green	525	1600	2000	-	2.7	3.3	3.7	20	30
1224SYGC/S530-E2	3	● Brilliant Yellow Green	573	63	100	-	1.7	2	2.4	20	25
1224USOC/S530-A3	3	● Brilliant Orange	615	188	295	-	1.7	2	2.4	20	25
1224UTC/S400-A6	3	○ White	x=0.28,y=0.29	1800	-	4500	2.8	-	4	20	25




UNIT : mm

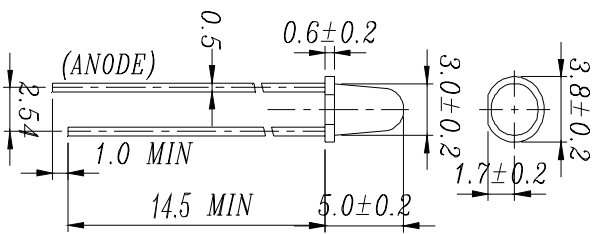


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
1254-10SDRD/S530-A3	3	● Deep Red	639	100	160	-	1.7	2	2.4	20	30
1254-10SDRT/S530-A3	3	● Deep Red	639	160	320	-	-	2	2.4	20	30
1254-10SURD/S530-A3	3	● Brilliant Red	624	250	400	-	1.7	2	2.4	20	30
1254-10SURT/S530-A3	3	● Brilliant Red	624	160	320	-	-	2	2.4	20	30
1254-10SYGD/S530-E2	3	● Brilliant Yellow Green	573	40	63	-	1.7	2	2.4	20	40
1254-10SYGT/S530-E2	3	● Brilliant Yellow Green	573	160	320	-	1.7	2	2.4	20	30
1254-10UYD/S530-A3	3	● Brilliant Yellow	589	100	200	-	1.7	2	2.4	20	30
1254-10UYOT/S530-A3	3	● Brilliant Orange	605	250	500	-	1.7	2	2.4	20	30


LED Lamps ■ 3mm Round Type

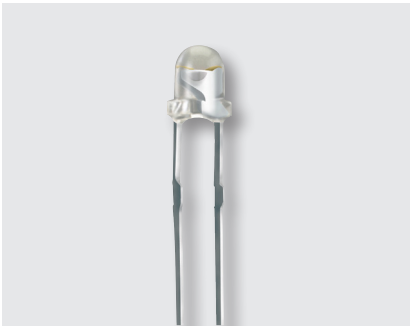


UNIT : mm

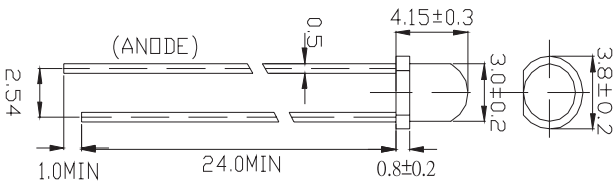

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
3294-15SUBC/S400-A6	3	Blue	470	160	320	-	2.7	3.3	3.7	20	90
3294-15SUGC/S400-A6	3	Green	525	500	1250	-	2.7	3.3	3.7	20	50
3294-15SURC/S400-A7	3	Brilliant Red	624	100	200	-	1.7	2.0	2.4	20	90
3294-15UBGC/S400-A6	3	Green	505	400	800	-	x	3.5	4.3	20	90

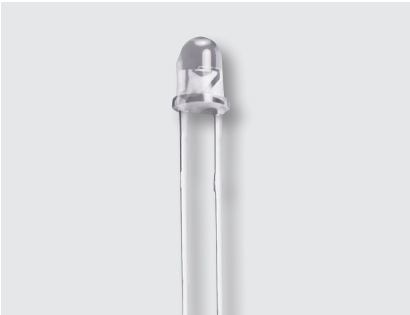


UNIT : mm

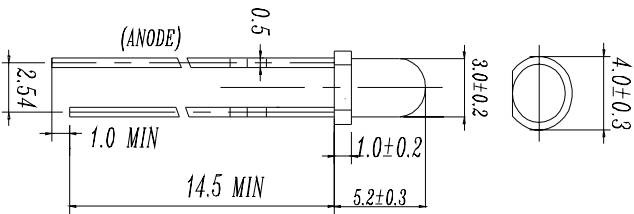


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
4204-10SUBC/C470/S400-X9-L	3	Blue	470	630	1250	-	2.7	3.3	3.7	20	25
4204-10SURC/S530-A3	3	Brilliant Red	624	320	500	-	1.7	2.0	2.4	20	25
4204-10SYGC/S530-E4	3	Brilliant Yellow Green	573	250	500	-	1.7	2.0	2.4	20	20


LED Lamps I 5mm Round Type

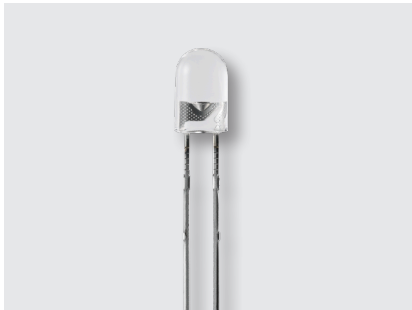


UNIT : mm

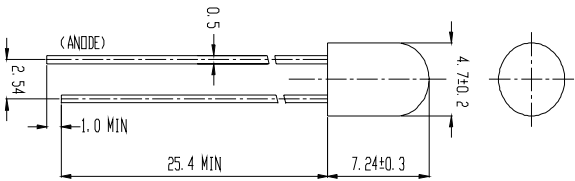

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
313-2SUBC/C470/S400-A4	4.7	Blue	470	630	1000	-	-	3.4	4	20	20
313-2SURD/S530-A3	4.7	Brilliant Red	624	63	100	-	1.7	2	2.4	20	40
313-2SYGC/S530-E2	4.7	Brilliant Yellow Green	573	250	500	-	1.7	2	2.4	20	20
313-2SYGD/S530-E2	4.7	Brilliant Yellow Green	573	40	80	-	1.7	2	2.4	20	45
313-2UYD/S530-A3	4.7	Brilliant Yellow	589	100	200	-	1.7	2	2.4	20	50

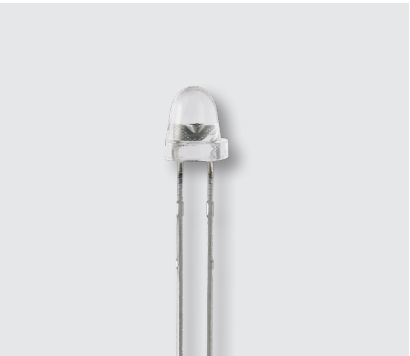

UNIT : mm

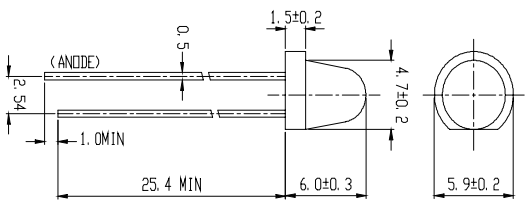

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
323-2SDRD/S530-A3	4.7	Deep Red	639	25	50	-	-	2	2.4	20	60
323-2SURD/S530-A3	4.7	Brilliant Red	624	63	100	-	1.7	2	2.4	20	40
323-2SYGD/S530-E2	4.7	Brilliant Yellow Green	573	40	80	-	1.7	2	2.4	20	60


[illegible]

Technical drawing of a mechanical part with dimensions and labels:


- (ANODE)**: Label for the top horizontal section.
- (F) 1.0 MIN**: Dimension for the length of the top horizontal section.
- (E) 16.0 MIN**: Dimension for the total length of the part.
- (C) 1.0 ± 0.2**: Dimension for the height of the top horizontal section.
- (B) 5.0 ± 0.2**: Dimension for the height of the vertical section.
- (C) 8.6 ± 0.3**: Dimension for the length of the vertical section.
- (A) 5.9 ± 0.3**: Dimension for the diameter of the circular end view.

139

LED Lamps | 5mm Round Type

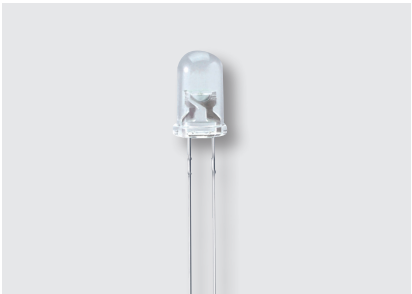


UNIT : mm

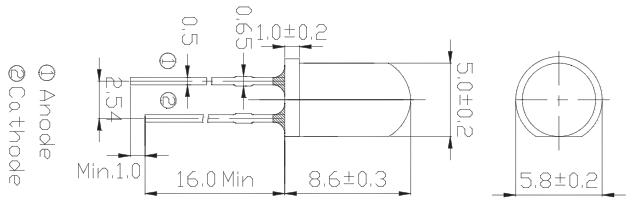


Product	Dimension (mm)	Color		I _v			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
334-15/F1C1-1XZA	5	○ White	x=0.29, y=0.28	18000	-	36000	2.8	-	3.6	20	15
334-15/F1C2-7VXA	5	○ White	x=0.30, y=0.29	11250	-	22500	2.8	-	3.6	20	20
334-15/F1C5-1RTA	5	○ White	x=0.29, y=0.28	4500	-	9000	2.8	-	3.6	20	50
334-15/FNC1-4YZA	5	○ White	x=0.30, y=0.29	22500	-	36000	2.8	-	3.6	20	15
334-15/T1C1-4WYA	5	○ White	x=0.30, y=0.29	14250	-	28500	2.8	-	3.6	20	15
334-15/T1C3-2TVA	5	○ White	x=0.26, y=0.27	7150	-	14250	2.8	-	3.6	20	30
334-15/T1C3-7TVA	5	○ White	x=0.31, y=0.30	7150	-	14250	2.8	-	3.6	20	30
334-15/T1C5-7QSA	5	○ White	x=0.30, y=0.29	3600	-	7150	2.8	-	3.6	20	50
334-15/T2C3-2TVC	5	○ White	x=0.26, y=0.27	7150	-	14250	2.8	-	3.6	20	30
334-15/T2C5-1PSB	5	○ White	x=0.29, y=0.28	2850	-	7150	2.8	-	3.6	20	50
334-15/T2C5-1QSB	5	○ White	x=0.29, y=0.28	3600	-	7150	2.8	-	3.6	20	50
334-15/X1C2-1UWA	5	● Warm White	x=0.40, y=0.39	9000	-	18000	2.8	-	3.6	20	20
334-15/X1C5-1QSA	5	● Warm White	x=0.40, y=0.39	3500	-	7150	2.8	-	3.6	20	50
334-15/X2C1-1WYB	5	● Warm White	x=0.40, y=0.39	14250	-	28500	2.8	-	3.6	20	15
334-15/X2C3-1TVA	5	● Warm White	x=0.40, y=0.39	7150	-	14250	2.8	-	3.6	20	30
334-15/X2C5-1PSB	5	● Warm White	x=0.40, y=0.39	2850	-	7150	2.8	-	3.6	20	50

LED Lamps

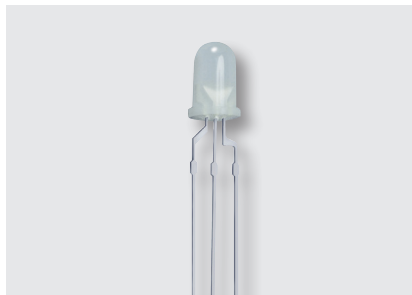

UNIT : mm

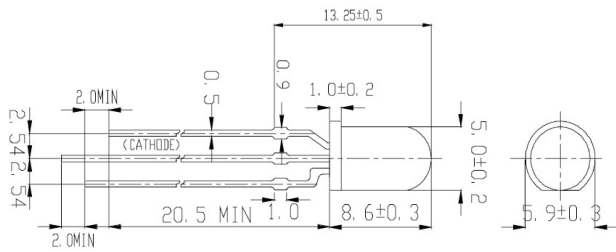


Product	Dimension (mm)	Color		I _v				IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	V _F (V) typ.	V _F (V) max.		
339-1SURSYGW/S530-A3	5	Brilliant Red Brilliant Yellow Green	624 / 573	25/16	50/32	2.0	2.4	20	70
339-1UYSYGW/S530-A3	5	Brilliant Yellow Brilliant Yellow Green	589 / 573	63/32	100/50	2.0	2.4	20	70


LED Lamps | 5mm Round Type




UNIT : mm

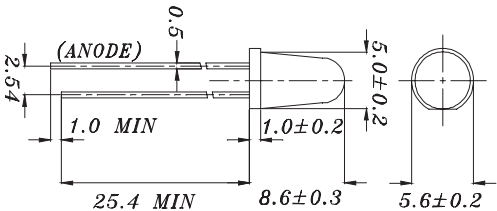

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
383-2SDRC/S530-A3	5	Deep Red	639	1000	2000	-	-	2	2.4	20	6
383-2SUBC/C470/S400-A6	5	Blue	470	1600	3200	-	2.7	3.3	3.7	20	20
383-2SUGC/S400-A4	5	Brilliant Green	525	2500	4000	-	-	3.4	4	20	20
383-2SURC/S400-A6	5	Brilliant Red	624	4000	6300	-	1.7	2	2.4	20	6
383-2SURC/S530-A3	5	Brilliant Red	624	1000	2500	-	-	2	2.4	20	6
383-2SYGC/S530-E2	5	Brilliant Yellow Green	573	160	320	-	-	2	2.4	20	10
383-2SYGD/S530-E2	5	Brilliant Yellow Green	575	40	80	-	1.7	2	2.4	20	25
383-2USOC/S530-A6	5	Brilliant Orange	615	6300	8000	-	-	2	2.4	20	6
383-2UYC/S530-A3	5	Brilliant Yellow	589	2713	4263	-	1.7	2	2.4	20	6

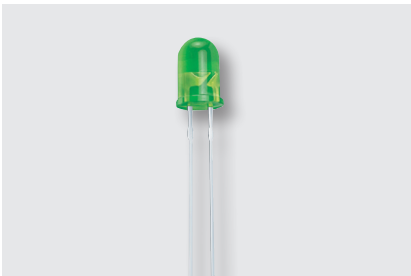


UNIT : mm

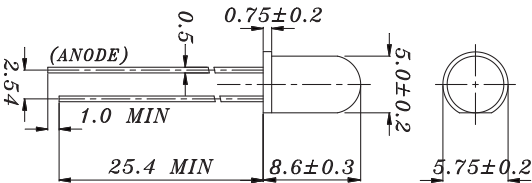


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
1383-2SDRD/S530-A3	5	Deep Red	639	160	320	-	-	2	2.4	20	30
1383-2SURD/S530-A3	5	Brilliant Red	624	250	500	-	1.7	2	2.4	20	40
1383SDRD/S530-A3	5	Deep Red	639	160	320	-	1.7	2	2.4	20	30
1383SYGD/S530-E2	5	Brilliant Yellow Green	573	100	200	-	1.7	2	2.4	20	25
1383UYD/S530-A3	5	Brilliant Yellow	589	400	800	-	1.7	2	2.4	20	25


LED Lamps | 5mm Round Type

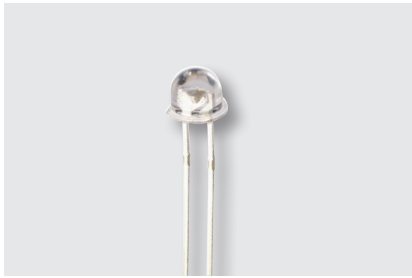


UNIT : mm

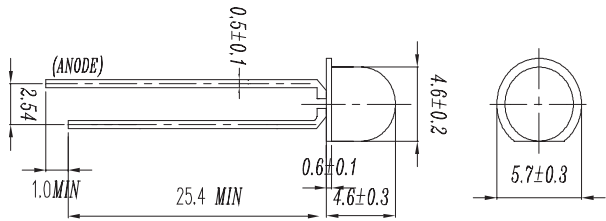


Product	Dimension (mm)	Color		I _v			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
6324/F1C9-1LNA	4.6	○ White	x=0.29y=0.28	1425	-	2850	2.8	-	3.6	20	100
6324-15SUBC/S400-X10	4.6	● Blue	470	250	500	-	2.7	3.3	3.7	20	60
6324-15SUGC/S400-A6	4.6	● Brilliant Green	525	630	1250	-	2.7	3.3	3.7	20	60
6324-15SURC/S400-A9	4.6	● Brilliant Red	624	160	320	-	1.7	2	2.4	20	100
6324-15UYC/S530-A6	4.6	● Brilliant Yellow	589	100	200	-	1.7	2	2.4	20	70

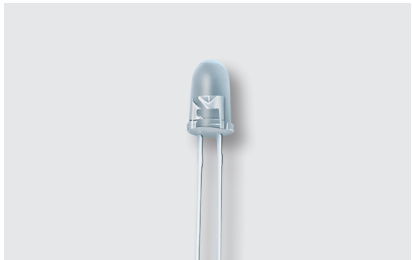


UNIT : mm

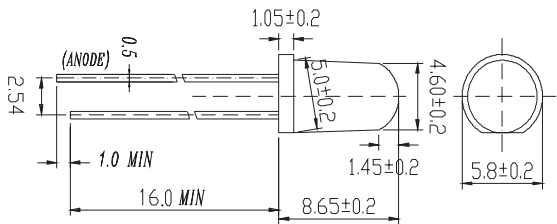

Product	Dimension (mm)	Color		I _v			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
7343-2SUGD/S400-X6	4.6	● Brilliant Green	525	1600	3200	-	2.7	3.3	3.7	20	30
7343-2SURD/S530-A3	4.6	● Brilliant Red	624	160	320	-	1.7	2	2.4	20	40
7343-2USOC/S530-A3	4.6	● Brilliant Orange	615	630	1250	-	-	2	4	20	20
7343M/BAC3-ATVA/C5	5	● Blue	470	8.4	-	21	2.6	-	3.4	5	30

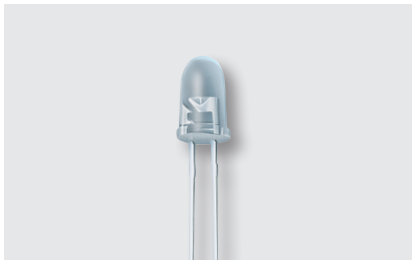


UNIT : mm

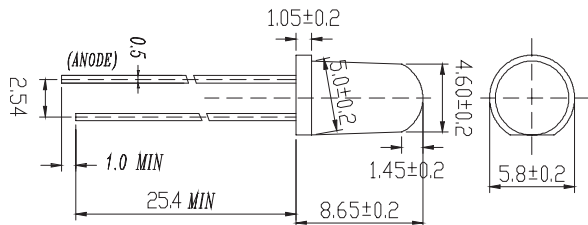


Product	Dimension (mm)	Color		I _v			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
7344-15SUBC/C470/S400-A6	4.6	● Blue	470	1000	2000	-	2.7	3.3	3.7	20	20
7344-15SUGC/S400-A5	4.6	● Brilliant Green	525	5000	8000	-	2.7	3.3	3.7	20	30
7344-15SUGC/S400-X6	4.6	● Brilliant Green	525	8000	11000	-	2.7	3.3	3.7	20	20

UNIT : mm

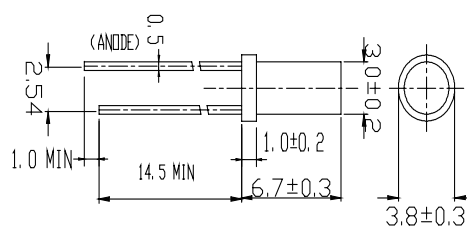


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
414-10SURD/S530-A3	3	● Brilliant Red	624	16	32	-	-	2	2.4	20	120
414-10UYD/S530-A3	3	● Brilliant Yellow	589	25	40	-	-	2	2.4	20	120

UNIT : mm

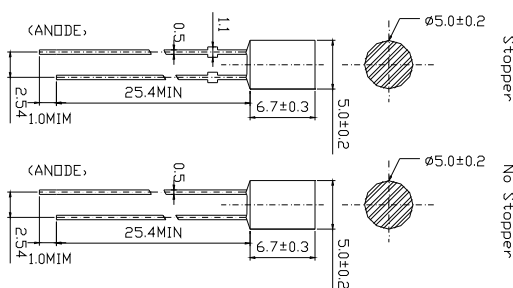

Product	Dimension (mm)	Color		I _v			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
423-2SUBC/S400-X9	5	Blue	470	100	200	-	2.7	3.3	3.7	20	80
423-2SURC/S530-A3	5	Brilliant Red	624	25	63	-	1.7	2	2.4	20	80
423-2UYC/S530-A6	5	Brilliant Yellow	589	100	200	-	1.7	2	2.4	20	90
423-2UYOC/S530-A6	5	Brilliant Orange	605	160	320	-	1.7	2	2.4	20	80

UNIT : mm

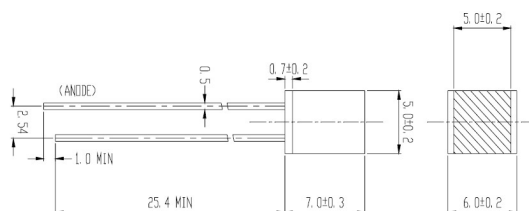


Product	Dimension (mm)	Color		I _v			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
583SURD/S530-A3	5	● Brilliant Red	624	12.5	20	-	1.7	2	2.4	20	130
583SYGD/S530-E2	5	● Brilliant Yellow Green	573	2.5	5	-	1.7	2	2.4	20	170
583UYD/S530-A3	5	● Brilliant Yellow	589	10	20	-	1.7	2	2.4	20	170


LED Lamps I Rectangular




UNIT : mm

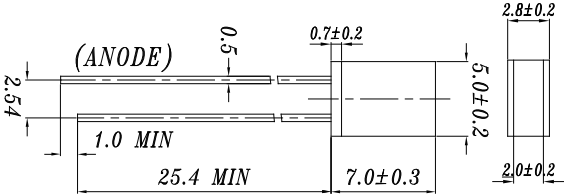


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
513SURD/S530-A3	2x5	● Brilliant Red	624	10	20	-	-	2	2.4	20	180
513SYGD/S530-E2	2x5	● Brilliant Yellow Green	573	6.3	12.5	-	-	2	2.4	20	140
513UYD/S530-A3	2x5	● Brilliant Yellow	589	20	32	-	-	2	2.4	20	150

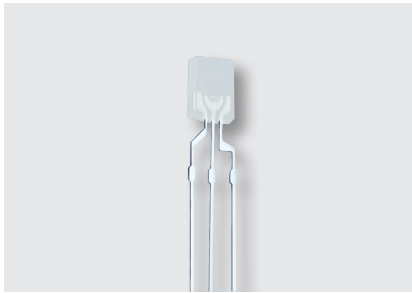


UNIT : mm

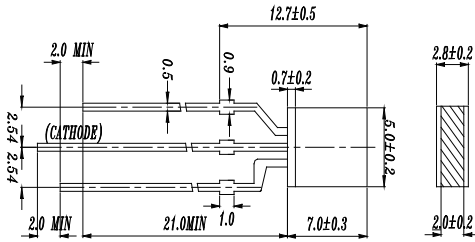

Product	Dimension (mm)	Color		I _V			V _F		IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.		
519-1SURSYGW/S530-A3	2.0x5.0	● Brilliant Red	624	1.7	2.0	2.4	6.3	12.5	20	180
		● Brilliant Yellow Green	573	1.7	2.0	2.4	2.5	5.0	20	180

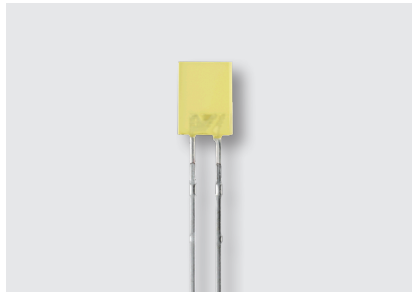

UNIT : mm

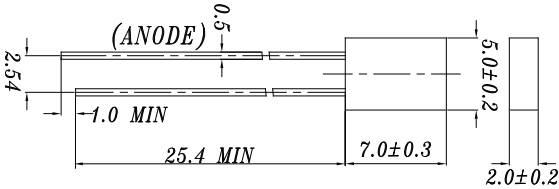


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
523-2SDRD/S530-A3	2.0 x 5.0	● Deep Red	639	10	16	-	-	2	2.4	20	120
523-2SUBD/C470/S400-A6	2.0 x 5.0	● Blue	470	10	20	-	2.7	3.3	3.7	20	130
523-2SUGD/S400-A6	2.0 x 5.0	● Green	525	160	320	-	2.7	3.3	3.7	20	130
523-2SURD/S530-A3	2.0 x 5.0	● Brilliant Red	624	16	32	-	1.7	2	2.4	20	120
523-2UYD/S530-A3	2.0 x 5.0	● Brilliant Yellow	589	6.3	12.5	-	1.7	2	2.4	20	120
523SYGD/S530-E2	2.0 x 5.0	● Brilliant Yellow Green	573	4	8	-	1.7	2	2.4	20	170
523UYD/S530-A3	2.0 x 5.0	● Brilliant Yellow	591	16	32	-	-	2	2.4	20	180

LED Lamps | Rectangular




UNIT : mm

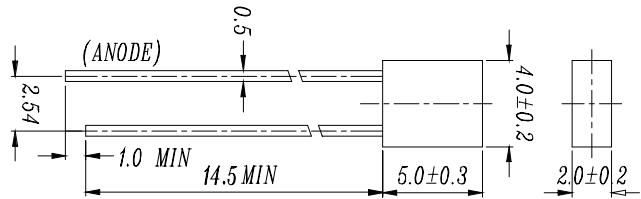


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
594SURD/S530-A3	2.0 x 4.0	● Brilliant Red	624	10	16	-	1.7	2.0	2.4	20	170
594SYGD/S530-E2	2.0 x 4.0	● Brilliant Yellow Green	573	4	8	-	1.7	2.0	2.4	20	180
594UYD/S530-A3	2.0 x 4.0	● Brilliant Yellow	589	10	20	-	1.7	2.0	2.4	20	180




UNIT : mm

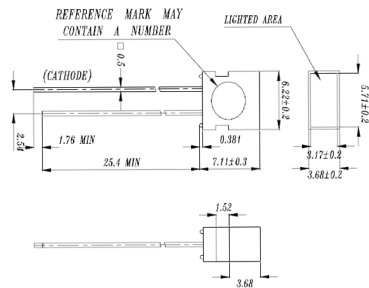

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
1003SUBD/S400-A6	3.68x6.22	● Blue	470	10	20	-	2.7	3.3	4	20	110
1003SUGD/S400-A4	3.68x6.22	● Brilliant Green	525	16	50	-	-	3.3	4	20	110
1003SURD/S530-A3	3.68x6.22	● Brilliant Red	624	25	50	-	1.7	2	2.4	20	110
1003SYGD/S530-E2	3.68x6.22	● Brilliant Yellow Green	573	6.3	12.5	-	1.7	2	2.4	20	110

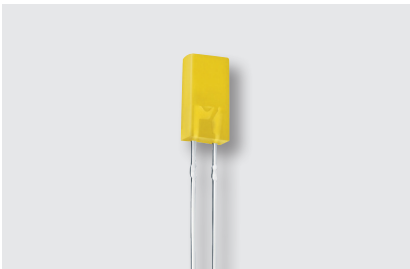


UNIT : mm

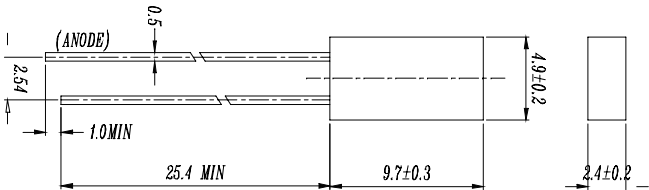


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
1533SURD/S530-A3	2.4 x 4.9	● Brilliant Red	624	10	20	-	1.7	2	2.4	20	170
1533UYD/S530-A3	2.4 x 4.9	● Brilliant Yellow	589	10	20	-	1.7	2	2.4	20	180


LED Lamps I 3mm Assembly LED

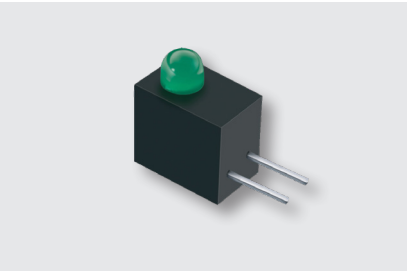


UNIT : mm




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A274B/SYG/S530-E2	3	● Brilliant Yellow	573	25	50	-	1.7	2.0	2.4	20	60

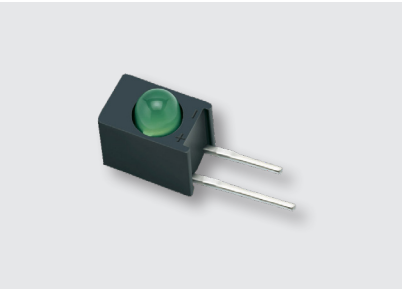


UNIT : mm



Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A214B/UY/S530-A3	3	● Brilliant Yellow	525	630	1250	-	2.7	3.3	3.7	20	30
A214B/SUG/S400-X6	3	● Green	589	50	100	-	1.7	2	2.4	20	60

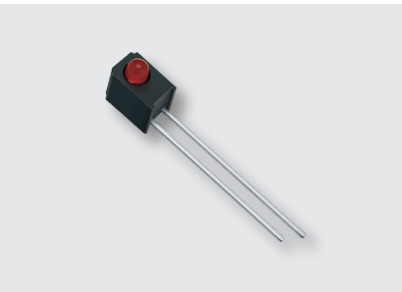


UNIT : mm




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A264B/SUB/S400-A4	3	● Blue	470	160	250	-	2.7	3.3	3.7	20	35
A264B/SUR/S530-A3	3	● Brilliant Red	624	63	125	-	1.7	2	2.4	20	60
A264B/SYG/S530-E2	3	● Brilliant Yellow Green	573	25	50	-	1.7	2	2.4	20	60
A264B/UY/S530-A3	3	● Brilliant Yellow	589	50	100	-	1.7	2	2.4	20	60


LED Lamps | 3mm Assembly LED

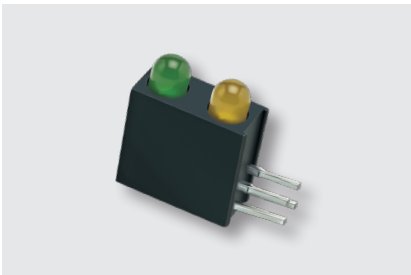


UNIT : mm



Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.		V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A694B/2SUR/S530-A3	3	● Brilliant Red	624	10	25		1.7	2.0	2.4	20	60
A694B/2SYG/S530-E2	3	● Brilliant Yellow Green	573	25	50	-	-	2.0	2.4	20	60
A694B/2UY/S530-A3	3	● Brilliant Yellow	589	16	32		1.7	2.0	2.4	20	60
A694B/SURSYG/S530-A3	3	● Brilliant Red ● Brilliant Yellow Green	R:624 G:573	R:40 G:25	R:80 G:50		1.7	2.0	2.4	20	60
A694B/SYGUY/S530-A3	3	● Brilliant Yellow Green ● Brilliant Yellow	SYG:573 UY:589	SYG:25 UY:40	SYG:50 UY:80		1.7	2.0	2.4	20	60

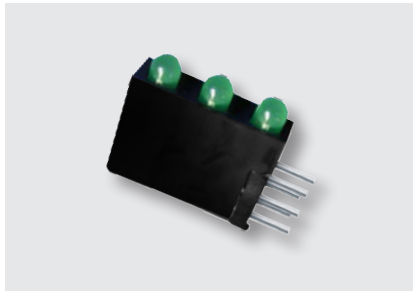

UNIT : mm




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A1394B/3SUR/S530-A3	3	● Brilliant Red	624	63	125	-	1.7	2	2.4	20	60
A1394B/3SYG/S530-E2	3	● Brilliant Yellow Green	573	25	50	-	1.7	2	2.4	20	60

LED Lamps

LED Lamps | 3mm Assembly LED




UNIT : mm




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A1844B/4SYG/S530-E2	3	Brilliant Yellow Green	573	16	32		1.7	2.0	2.4	20	60

LED Lamps | 5mm Assembly LED

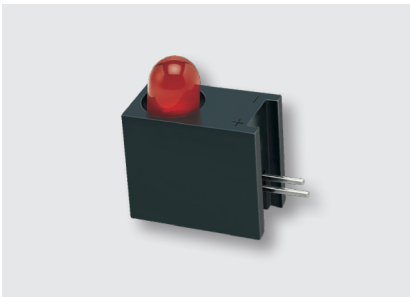

UNIT : mm

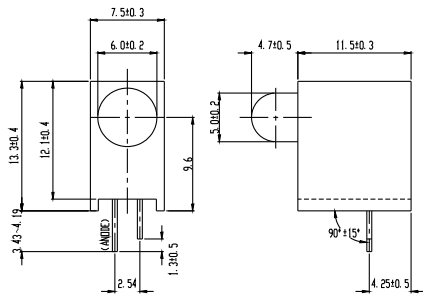


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A203B/SUR/S530-A3	5	Brilliant Red	624	100	200	-	1.7	2.0	2.4	20	30
A203B/SYG/S530-E2	5	Brilliant Yellow Green	573	40	80	-	1.7	2.0	2.4	20	45
A203B/UY/S530-A3	5	Brilliant Yellow	589	100	200	-	1.7	2.0	2.4	20	30


LED Lamps | 5mm Assembly LED




UNIT : mm

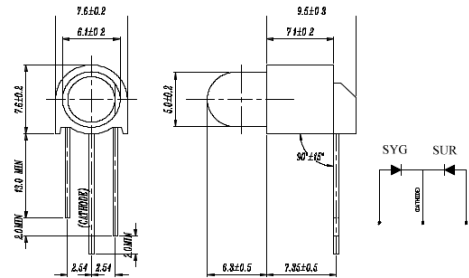

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A1479-1B/SURSYGW/S530-A3	5	● Brilliant Red	R:624	25	50	-	1.7	2.0	2.4	20	100
	5	● Brilliant Yellow Green	G:573	16	32	-	1.7	2.0	2.4	20	100

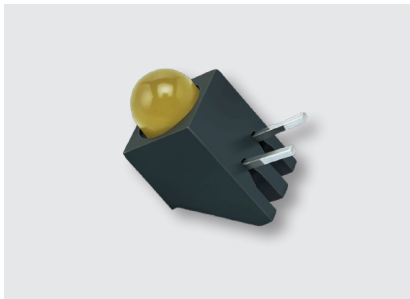


UNIT : mm



Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A93B/SUB/S400-A6	4.7	● Blue	470	400	800	-	2.7	3.3	3.7	20	20
A93B/SUR/S530-A3	4.7	● Brilliant Red	624	100	250	-	-	2	2.4	20	40
A93B/SYG/S530-E2	4.7	● Brilliant Yellow Green	573	40	80	-	1.7	2	2.4	20	80
A93B/UY/S530-A3	4.7	● Brilliant Yellow	589	160	320	-	1.7	2	2.4	20	35




UNIT : mm




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
A253B/SUBC/S400-A6	5	● Blue	470	1000	1600	-	2.7	3.3	3.7	20	10
A253B/SYG/S530-E2	5	● Brilliant Yellow Green	573	40	80	-	1.7	2.0	2.4	20	45

LED Lamps


LED Digital Displays | Chip On Board Display | Single Digit Display

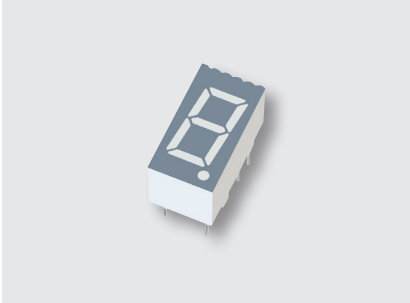


UNIT : mm




Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
S315SURWA/S530-A3	9.14 (0.3")	4.8	● Brilliant Red	624	White	Gray	CC	4.0	8.0
S315YGWA/S530-E2	9.14 (0.3")	4.8	● Brilliant Yellow Green	573	White	Gray	CC	2.0	3.2

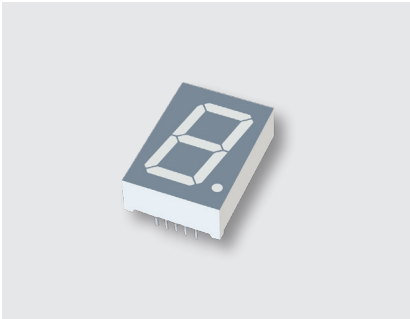


UNIT : mm

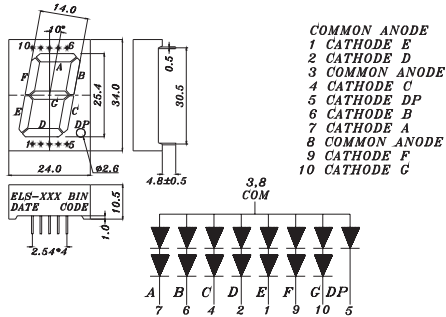

Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
S1006SURWA/S530-A3	25.4 (1")	14	● Brilliant Red	624	White	Gray	CA	15.0	24.0
S1006SYGWA/S530-E2	25.4 (1")	14	● Brilliant Yellow Green	573	Green	Gray	CA	5.6	12.5
S1006SDRDB/A3/S660	25.4 (1")	14	● Deep Red	639	Red	Black	CA	11.0	24.0

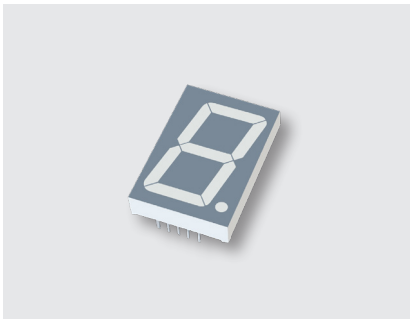

UNIT : mm

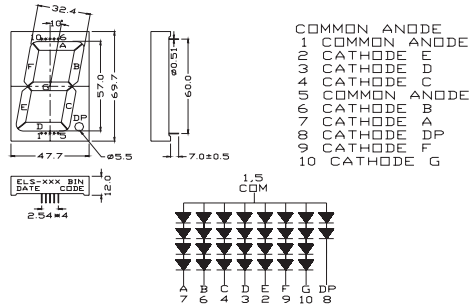


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
S2326SURWA/S530-A3	57 (2")	32.4	● Brilliant Red	624	White	Gray	CA	15.0	34.0
S2326USOWA/S530-A4	57 (2")	32.4	● Reddish Orange	615	White	Gray	CA	30.0	67.0
S2326SYGWA/S530-E2	57 (2")	32.4	● Brilliant Yellow Green	573	White	Gray	CA	5.6	12.5
S2326UBWA/C470	57 (2")	32.4	● Blue	468	White	Gray	CA	15.0	34.0

LED Digital Displays | Chip On Board Display | Single Digit Display




UNIT : mm



Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
S321SURWA/S530-A3	7.62 (0.3")	5.2	● Brilliant Red	624	White	Gray	CC	5.6	11
S321USOWA/S530-A4	7.62 (0.3")	5.2	● Reddish Orange	615	White	Gray	CC	7.8	17.6




UNIT : mm




Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
S322SURWA/S530-A3	7.62 (0.3")	5.2	● Brilliant Red	624	White	Gray	CA	5.6	11.0
S322SYGWA/S530-E2	7.62 (0.3")	5.2	● Brilliant Yellow Green	573	White	Gray	CA	2.0	4.5

LED Digital Displays | Chip On Board Display | Dual Digit Display

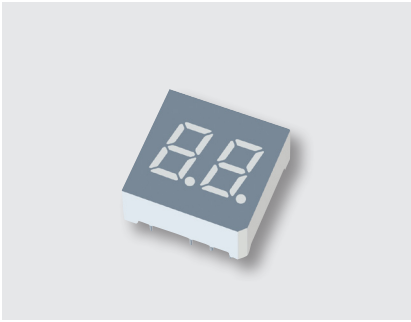


UNIT : mm

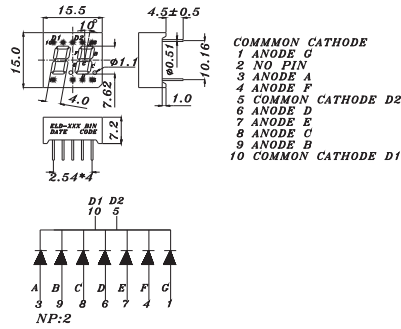

Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
D305SURWA/S530-A3	7.62(0.3)	4	● Brilliant Red	624	White	Gray	CC	4.0	6.4
D305SYGWA/E2/S660	7.62(0.3)	4	● Brilliant Yellow Green	573	White	Gray	CC	1.05	1.68
D305SDRWB/S530-A3	7.62(0.3)	4	● Deep Red	639	White	Black	CC	2.0	4.5



UNIT : mm

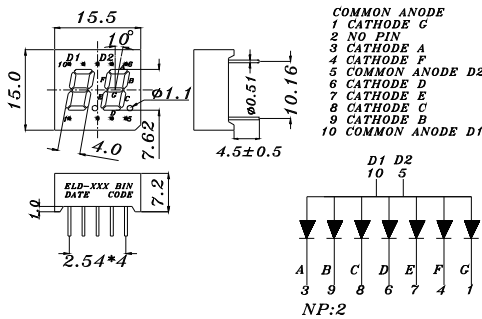


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
D306SURWA/S530-A3	7.62(0.3)	4	● Brilliant Red	624	White	Gray	CA	4.0	6.4
D306USOWA/S530-A3	7.62(0.3)	4	● Reddish Orange	615	White	Gray	CA	4.0	8.9
D306UYWA/S530-A3	7.62(0.3)	4	● Brilliant Yellow	589	White	Gray	CA	1.4	3.2

LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

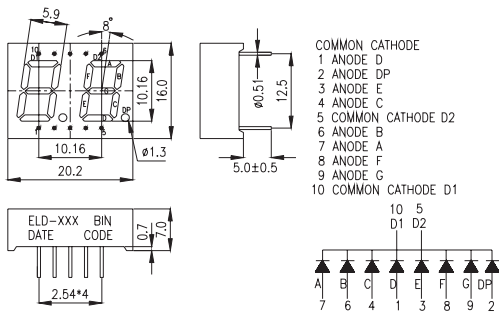

Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
D425SURWA/S530-A3	10.16 (0.4")	5.9	Brilliant Red	624	White	Gray	CC	7.8	15.0
D425USOWA/S530-A4	10.16 (0.4")	5.9	Reddish Orange	615	White	Gray	CC	11.0	24.0
D425SYGWA/S530-E2	10.16 (0.4")	5.9	Brilliant Yellow Green	573	White	Gray	CC	2.0	3.2
D425SDRWB/A3/S660	10.16 (0.4")	5.9	Deep Red	639	White	Black	CC	4.0	6.4
D425SDRWA/S530-A4	10.16 (0.4")	5.9	Deep Red	639	White	Gray	CC	4.0	8.9



UNIT : mm

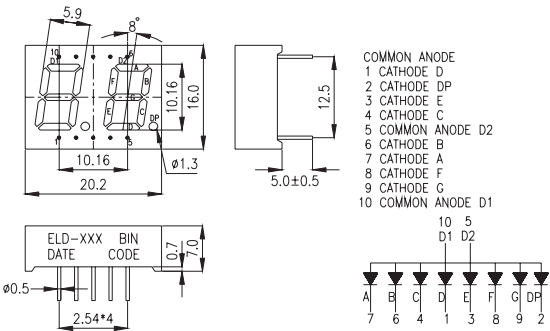


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
D426SURWB/S530-A3	10.16 (0.4")	5.9	Brilliant Red	624	White	Black	CA	7.8	15.0
D426USOWA/S530-A3	10.16 (0.4")	5.9	Reddish Orange	615	White	Gray	CA	11.0	24.0
D426UYOWB/S530-A3	10.16 (0.4")	5.9	Orange	605	White	Black	CA	5.6	12.5
D426SYGWA/S530-E2	10.16 (0.4")	5.9	Brilliant Yellow Green	573	White	Gray	CA	2.0	3.2
D426SURWB/S530-A3	10.16 (0.4")	5.9	Brilliant Red	624	White	Black	CA	7.8	15.0
D426UYOWB/S530-A3	10.16 (0.4")	5.9	Orange	605	White	Black	CA	5.6	12.5
D426SYGWA/S530-E2	10.16 (0.4")	5.9	Brilliant Yellow Green	573	White	Gray	CA	2.0	3.2


LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

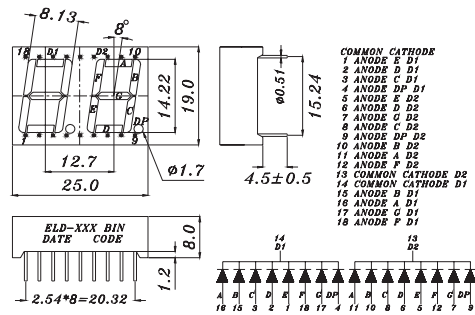

Product	Dimension (mm)		Color				CC/CA	I _v		
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.	I _v (mcd) max
D511SURWB/S530-A3	14.22 (0.5")	8.13	● Brilliant Red	624	White	Black	CC	7.8	15.0	-
D511SYGWA/S530-E2	14.22 (0.5")	8.13	● Brilliant Yellow Green	573	White	Gray	CC	2.8	6.4	-
D511UTWA/T5/S700/S1025	14.22 (0.5")	8.13	○ Pure White	X=0.28,Y=0.267	White	Gray	CC	100.0	-	195.0
D511UBWA/C470	14.22 (0.5")	8.13	● Blue	470	White	Gray	CC	4.0	6.4	-
D511USOWA/S530-A4	14.22 (0.5")	8.13	● Reddish Orange	615	White	Gray	CC	7.8	15.0	-
D511SDRWB/A3/S982	14.22 (0.5")	8.13	● Deep Red	639	White	Black	CC	4.0	8.9	-
D511SYGWB/S530-E2	14.22 (0.5)	8.13	● Brilliant Yellow Green	573	White	Black	CC	2.8	6.4	-

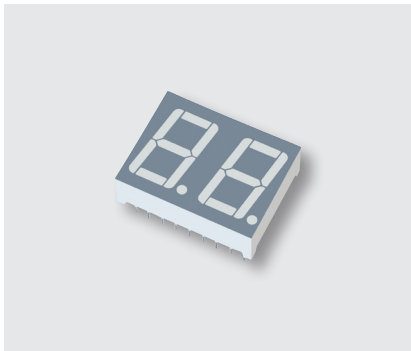

UNIT : mm

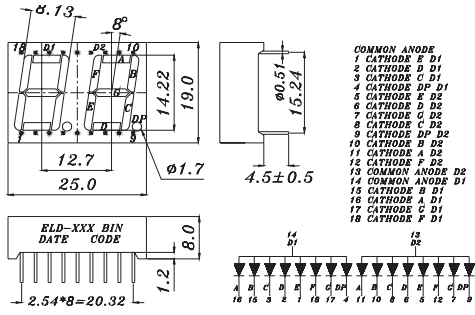


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
D512SURWB/S530-A3	14.22 (0.5")	8.13	● Brilliant Red	624	White	Black	CA	7.8	17.6
D512SYGWB/E2/S962	14.22 (0.5")	8.13	● Brilliant Yellow Green	573	White	Black	CA	2.8	6.4
D512SDRWB/S530-A3	14.22 (0.5")	8.13	● Deep Red	639	White	Black	CA	4.0	8.9


LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

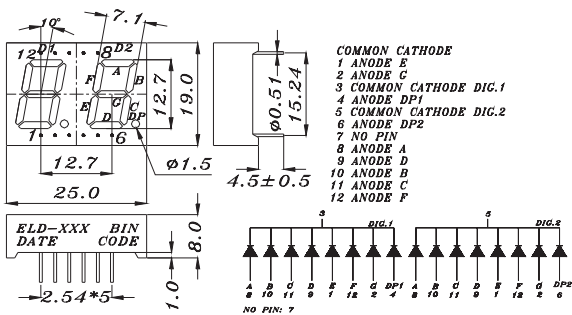


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
D515SURWA/S530-A3	12.7 (0.5")	7.1	● Brilliant Red	624	White	Gray	CC	7.8	15.0

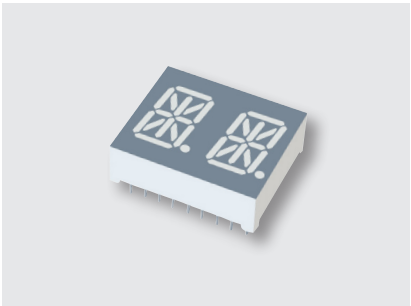


UNIT : mm

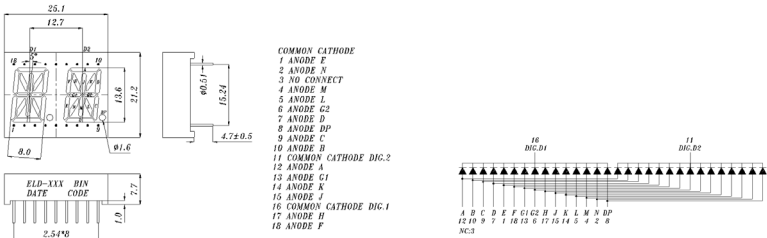

Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
D525SURWA/S530-A3	13.6(0.5)	8	● Brilliant Red	624	White	Gray	CC	7.8	12.5
D525SYGWA/S530-E2	13.6(0.5)	8	● Brilliant Yellow Green	573	White	Gray	CC	2.8	4.5
D525USOWA/S530-A3	13.6(0.5)	8	● Reddish Orange	615	White	Gray	CC	5.6	12.5

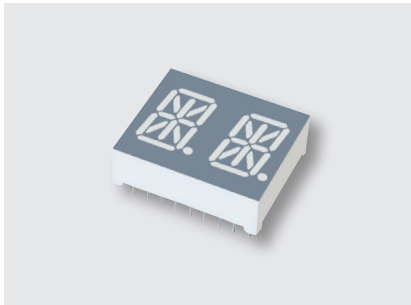

UNIT : mm

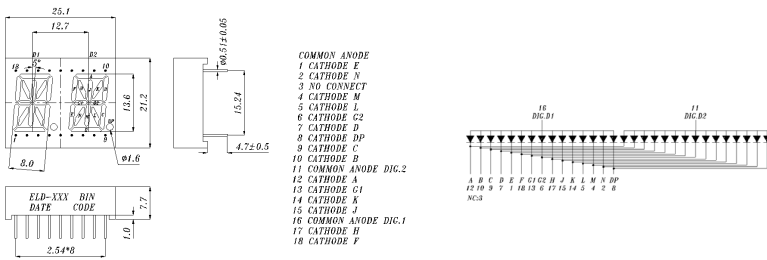


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
D526SURWA/S530-A3	13.6(0.5)	8	● Brilliant Red	624	White	Gray	CA	7.8	12.5
D526USOWA/S530-A4	13.6(0.5)	8	● Reddish Orange	615	White	Gray	CA	5.6	12.5

LED Digital Displays | Chip On Board Display | Three Digit Display




UNIT : mm

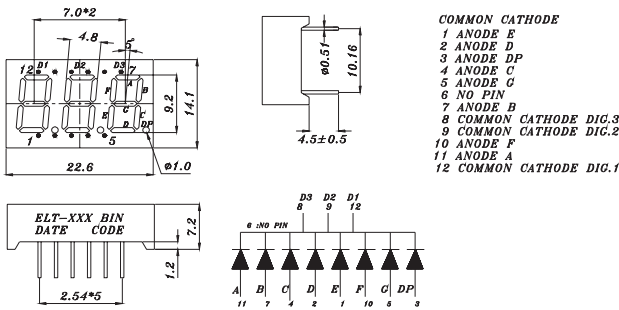

Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm (inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
T315SYGWA/S530-E2	9.2 (0.3")	4.8	Brilliant Yellow Green	573	White	Gray	CC	1.4	3.2
T315SURWA/S530-A3	9.2 (0.3")	4.8	Brilliant Red	624	White	Gray	CC	5.6	12.5
T315UYOWA/S530-A3	9.2 (0.3")	4.8	Orange	605	White	Gray	CC	4.0	8.9
T315UYWA/S530-A3	9.2 (0.3")	4.8	Brilliant Yellow	589	White	Gray	CC	2.8	4.5
T315SDRWA/S530-A3	9.2 (0.3")	4.8	Deep Red	639	White	Gray	CC	4.0	6.4



UNIT : mm


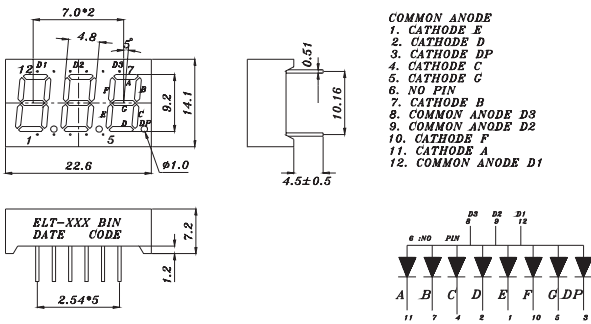


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm (inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
T316SURWA/S530-A3	9.2 (0.3)	4.8	Brilliant Red	624	White	Gray	CA	5.6	8.9
T316SYGWA/S530-E2	9.2 (0.3)	4.8	Brilliant Yellow Green	573	White	Gray	CA	1.4	3.2
T316SDRWA/S530-A3	9.2 (0.3)	4.8	Deep Red	639	White	Gray	CA	4.0	6.4



LED Digital Displays | Chip On Board Display | Three Digit Display



UNIT : mm





- COMMON CATHODE
- 1 ANODE E
 - 2 ANODE D
 - 3 ANODE DP
 - 4 ANODE C
 - 5 ANODE B
 - 6 NO CONNECT
 - 7 ANODE A
 - 8 COMMON CATHODE D3
 - 9 COMMON CATHODE D2
 - 10 ANODE F
 - 11 ANODE A
 - 12 COMMON CATHODE D1





Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
T511SURWA/S530-A3	14.22 (0.5")	8.13	● Brilliant Red	624	White	Gray	CC	7.8	17.6
T511SYGWA/S530-E2	14.22 (0.5")	8.13	● Brilliant Yellow Green	573	White	Gray	CC	2.8	4.5
T511SUGWB/S400-A4/S800	14.22 (0.5")	8.13	● Brilliant Green	525	White	Black	CC	30.0	67.0
T511UYOWA/S530-A3	14.22 (0.5")	8.13	● Orange	605	White	Gray	CC	5.6	12.5
T511SDRWA/S530-A3	14.22 (0.5")	8.13	● Deep Red	639	White	Gray	CC	5.6	12.5



UNIT : mm




- COMMON ANODE
- 1 CATHODE E
 - 2 CATHODE D
 - 3 CATHODE DP
 - 4 CATHODE C
 - 5 CATHODE B
 - 6 NO CONNECT
 - 7 CATHODE A
 - 8 COMMON ANODE D3
 - 9 COMMON ANODE D2
 - 10 COMMON ANODE F
 - 11 CATHODE A
 - 12 COMMON ANODE D1




Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
T512SYGWA/S530-E2	14.22 (0.5")	8.13	● Brilliant Yellow Green	573	White	Gray	CA	2.8	4.5
T512SURWA/S530-A3	14.22 (0.5")	8.13	● Brilliant Red	624	White	Gray	CA	7.8	17.6
T512UYOWA/S530-A3	14.22 (0.5")	8.13	● Orange	605	White	Gray	CA	5.6	12.5
T512USOWA/S530-A4	14.22 (0.5")	8.13	● Reddish Orange	615	White	Gray	CA	7.8	17.6
T512SUBWA/X9	14.22 (0.5")	8.13	● Blue	470	White	Gray	CA	11.0	24.0
T512SDRWB/A3	14.22 (0.5")	8.13	● Deep Red	639	White	Black	CA	5.6	12.5
T512SURWB/S530-A3	14.22 (0.5)	8.13	● Brilliant Red	624	White	Black	CA	7.8	17.6
T512SYGWB/S530-E2	14.22 (0.5)	8.13	● Brilliant Yellow Green	573	White	Black	CA	2.8	4.5


LED Digital Displays | Chip On Board Display | Four Digit Display

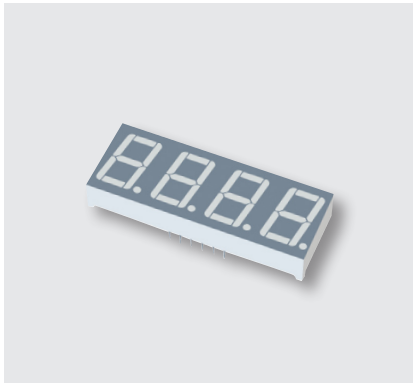


UNIT : mm

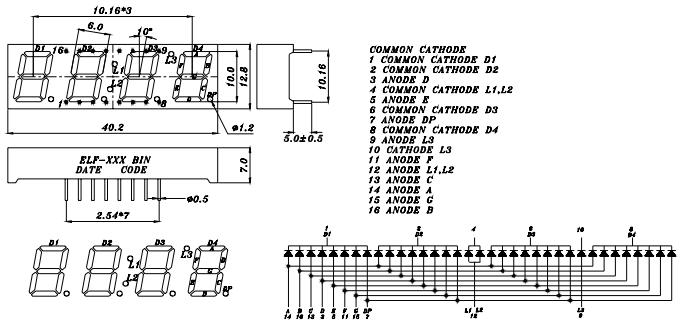

Product	Dimension (mm)		Color				CC/ CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
F415SURWA/S530-A3	10(0.4)	6	● Brilliant Red	624	White	Gray	CC	5.6	8.9
F415SURWB/S530-A3	10 (0.4)	6	● Brilliant Red	625	White	Black	CC	5.0	8.9
F415UYOWB/S530-A3/S715	10 (0.4")	6	● Orange	605	White	Black	CC	7.8	17.6

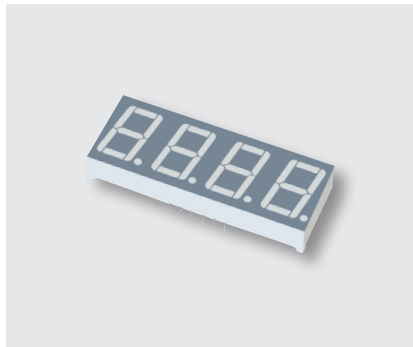


UNIT : mm

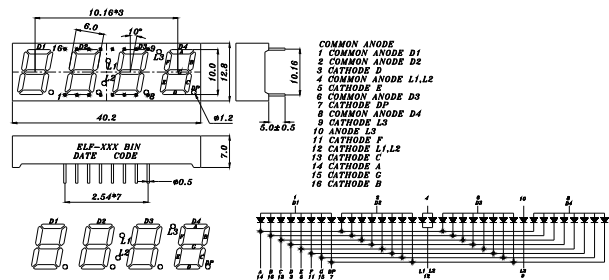


Product	Dimension (mm)		Color				CC/ CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
F416SYGWA/S530-E3	10 (0.4")	6	● Brilliant Yellow Green	573	White	Gray	CA	4.0	8.9
F416SURWB/S530-A3	10 (0.4")	6	● Brilliant Red	624	White	Black	CA	5.6	8.9
F416USRWA/S530-A3	10 (0.4")	6	● Dark Red	631	White	Gray	CA	5.6	8.9
F416UYWB/S530-A3/P53	10 (0.4")	6	● Brilliant Yellow	589	White	Black	CA	5.6	12.5
F416SURWA/S530-A3	10 (0.4)	6	● Brilliant Red	624	White	Gray	CA	5.6	12.5


LED Digital Displays | Chip On Board Display | Four Digit Display

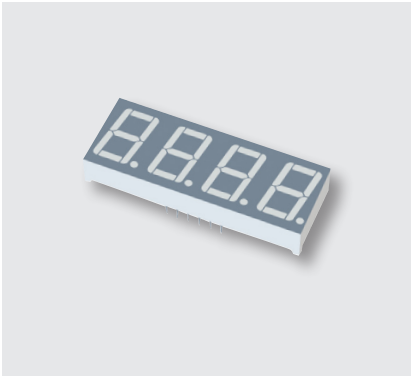


UNIT : mm

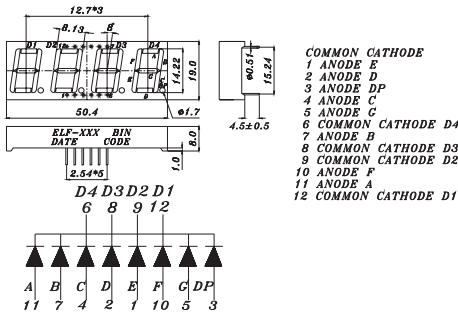

Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
F511SURWA/S530-A3	14.22 (0.5")	8.13	● Brilliant Red	624	White	Gray	CC	7.8	15.0
F511SYGWA/S530-E2	14.22 (0.5")	8.13	● Brilliant Yellow Green	573	White	Gray	CC	2.8	6.4
F511SDRWB/S530-A3	14.22 (0.5")	8.13	● Deep Red	639	White	Black	CC	5.6	12.5
F511SURWB/S530-A3	14.22 (0.5")	8.13	● Brilliant Red	624	White	Black	CC	11	24

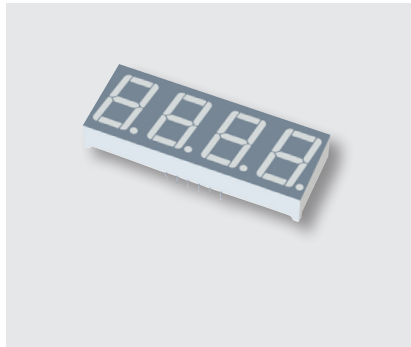

UNIT : mm

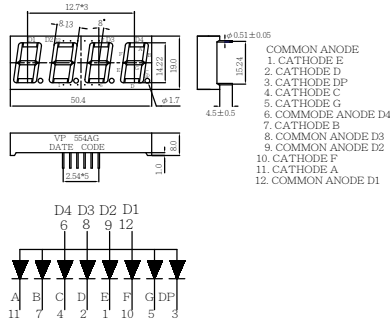


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
F512SURWA/S530-A3	14.22 (0.5")	8.13	● Brilliant Red	624	White	Gray	CA	7.8	15.0
F512SYGWA/S530-E2	14.22 (0.5")	8.13	● Brilliant Yellow Green	573	White	Gray	CA	2.8	6.4
F512SDRWB/S530-A3	14.22 (0.5")	8.13	● Deep Red	639	White	Black	CA	5.6	12.5
F512SUBWB/X9/S800	14.22 (0.5")	8.13	● Blue	470	White	Black	CA	7.8	17.6

LED Digital Displays

LED Digital Displays | Chip On Board Display | Dot Matrix Display




UNIT : mm

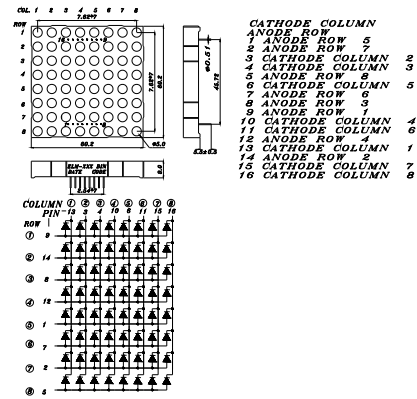

Product	Size (LxWmm)	Color				CC/CA	I _v	
		Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
M2881SURWA/S530-A3	60.2x60.2	● Brilliant Red	624	White	Gray	CC	7.8	21.0
M2881SYGWA/S530-E2	60.2x60.2	● Brilliant Yellow Green	573	White	Gray	CC	7.8	17.6
M2881UYWA/S530-A3	60.2x60.2	● Brilliant Yellow	589	White	Gray	CC	11.0	17.6




UNIT : mm

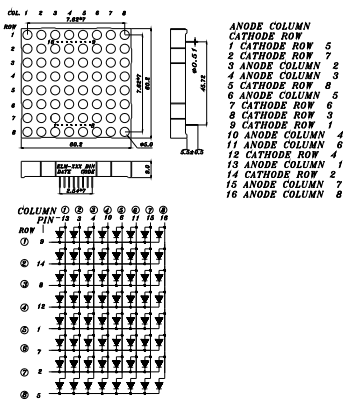


Product	Size (LxWmm)	Color				CC/CA	I _v	
		Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
M2882SYGWA/S530-E2	60.2x60.2	● Brilliant Yellow Green	573	White	Gray	CA	7.8	17.6


LED Digital Displays | Chip On Board Display | Light Bar Display

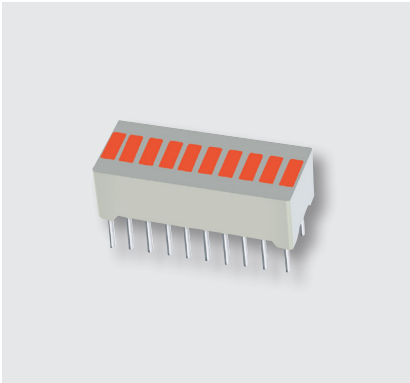


UNIT : mm

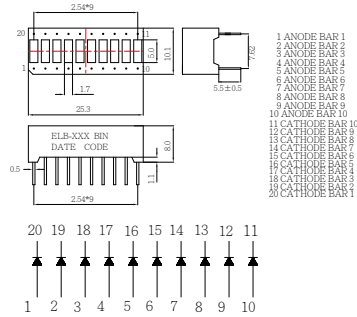

Product	Size (LxWmm)	Color				CC/CA	I _v	
		Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
B1001SDRWB/S530-A3	25.3x10.1	Deep Red	639	White	Black	CC	4.0	8.9
B1001SURWB/S530-A3	25.3x10.1	Brilliant Red	624	White	Black	CC	5.6	12.5
B1001USOWA/S530-A4	25.3x10.1	Reddish Orange	615	White	Gray	CC	7.8	17.6
B1001SYGWA/S530-E2	25.3x10.1	Brilliant Yellow Green	573	White	Gray	CC	2.8	4.5
B1001UBWA/C470	25.3x10.1	Blue	470	White	Gray	CC	4.0	8.9
B1001UYWA/S530-A3	25.3x10.1	Super Yellow	589	White	Gray	CC	7.8	12.5

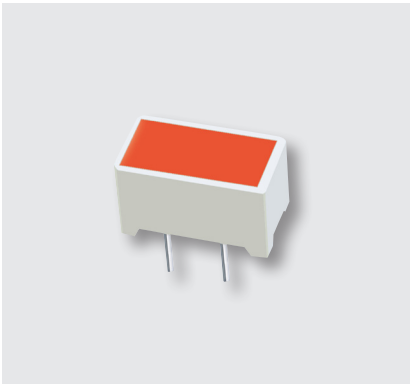


UNIT : mm

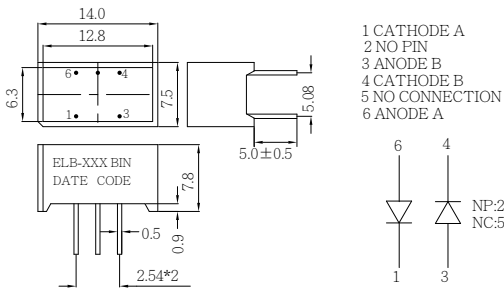


Product	Size (LxWmm)	Color				CC/CA	I _v	
		Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
B1010SURD/S530-A3	14.0x7.5	Brilliant Red	624	Red	White	CA	11.0	24.0
B1010SYGD/S530-E2	14.0x7.5	Brilliant Yellow Green	573	Green	White	CA	2.8	6.4
B1010UYD/S530-A3	14.0x7.5	Brilliant Yellow	589	Yellow	White	CA	15.0	34.0


LED Digital Displays | SMD Display | Single Digit Display

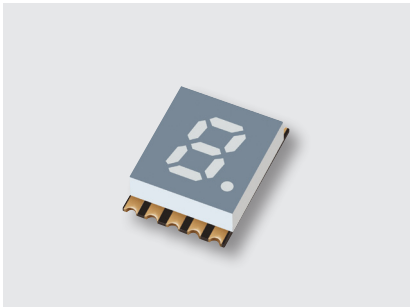


UNIT : mm

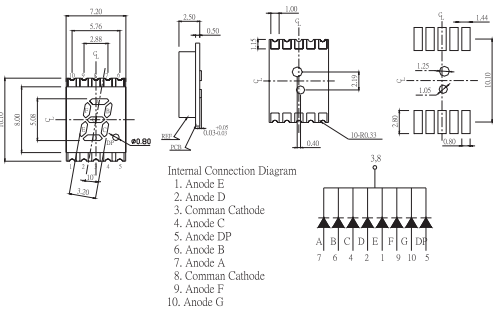

Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SS205SURWA/S530-A3/S290	5.08 (0.2")	3.2	Brilliant Red	624	White	Gray	CC	5.6	12.5
SS205UYOWA/S530-A3/S290	5.08 (0.2")	3.2	Brilliant Orange	605	White	Gray	CC	7.8	17.6
SS205UYWA/S530-A3/S290	5.08 (0.2")	3.2	Brilliant Yellow	589	White	Gray	CC	7.8	17.6
SS205SYGWA/S530-E2/S290	5.08 (0.2")	3.2	Brilliant Yellow Green	573	White	Gray	CC	4.0	8.9
SS205SUBWA/S400-A3/S669	5.08 (0.2")	3.2	Blue	470	White	Gray	CC	7.8	17.6

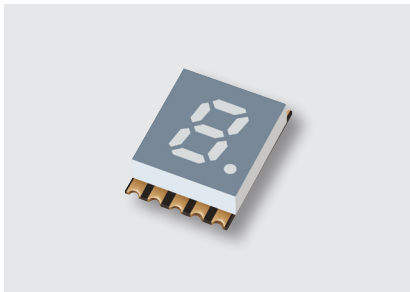


UNIT : mm

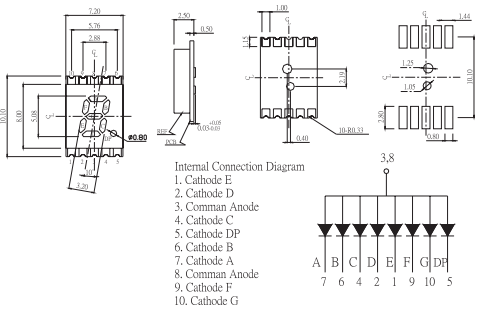


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SS206SURWA/S530-A3/S290	5.08 (0.2")	3.2	Brilliant Red	624	White	Gray	CA	5.6	12.5
SS206SYGWA/S530-E2/S290	5.08 (0.2")	3.2	Brilliant Yellow Green	573	White	Gray	CA	4.0	8.9
SS206USRWA/S530-A3/S290	5.08 (0.2")	3.2	Dark Red	631	White	Gray	CA	4.0	8.9


LED Digital Displays | SMD Display | Single Digit Display

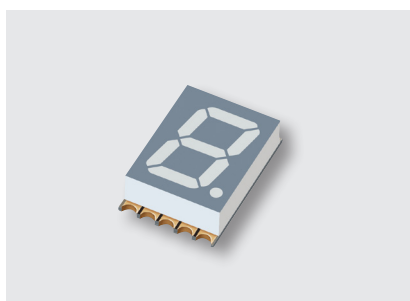


UNIT : mm

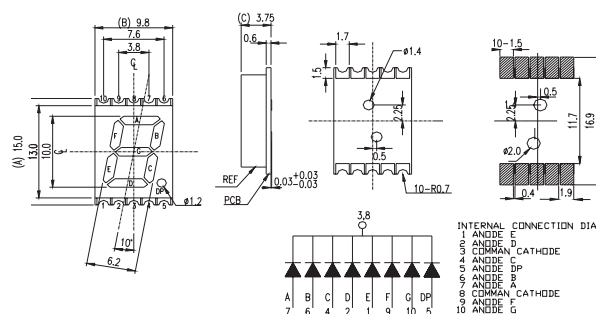

Product	Dimension (mm)		Color				CC/ CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SS405SURWA/S530-A3/S290	10 (0.4")	6.2	● Brilliant Red	624	White	Gray	CC	7.8	17.6
SS405SYGWA/S530-E2	10 (0.4")	6.2	● Brilliant Yellow Green	573	White	Gray	CC	5.6	12.5

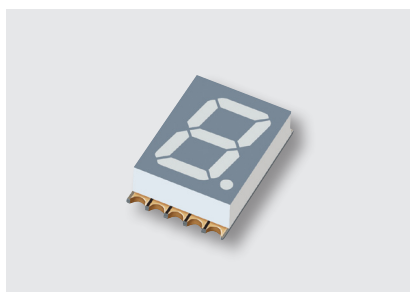


UNIT : mm

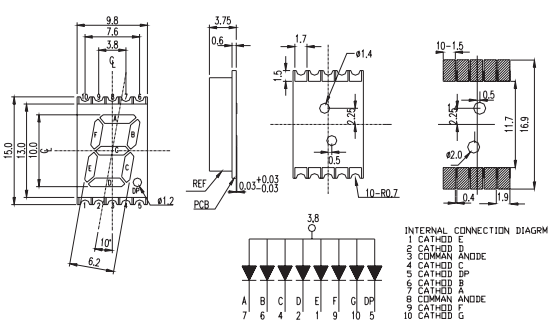


Product	Dimension (mm)		Color				CC/ CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SS406SURWA/S530-A3/S290	10 (0.4")	6.2	● Brilliant Red	624	White	Gray	CA	7.8	17.6
SS406SYGWA/S530-E2	10 (0.4")	6.2	● Brilliant Yellow Green	573	White	Gray	CA	5.6	12.5
SS406UBWA/C470/S290	10 (0.4")	6.2	● Blue	470	White	Gray	CA	15.0	40.5
SS406USRWA/S530-A3/S290	10 (0.4")	6.2	● Dark Red	631	White	Gray	CA	5.6	12.5
SS406UWWA/S290	10 (0.4")	6.2	○ Pure White	X=0.270/0.310 Y=0.222/0.343	White	Gray	CA	30.0	67.0
SS406UYWA/S530-A4/S290	10 (0.4")	6.2	● Brilliant Yellow	589	White	Gray	CA	15.0	34.0


LED Digital Displays | SMD Display | Single Digit Display

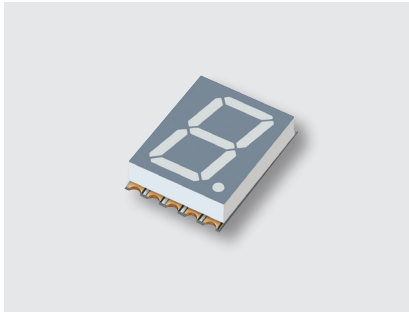


UNIT : mm

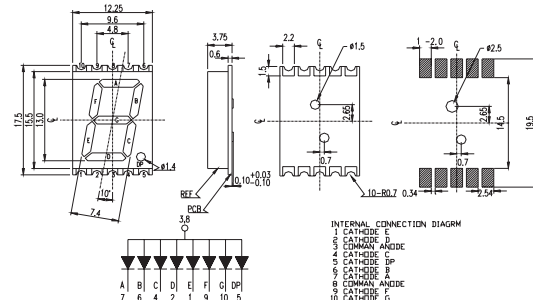


Product	Dimension (mm)		Color				CC/ CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SS506SYGWA/S530-E2	13.0(0.5)	7.4	● Brilliant Yellow Green	573	White	Gray	CA	5.6	9.1
SS506SURWA/S530-A4/S290	13.0(0.5)	7.4	● Brilliant Red	624	White	Gray	CA	7.8	15.0
SS506UTWA/T5/S290	13.0(0.5)	7.4	○ Pure White	X=0.270/0.310 Y=0.222/0.343	White	Gray	CA	30.0	86.9

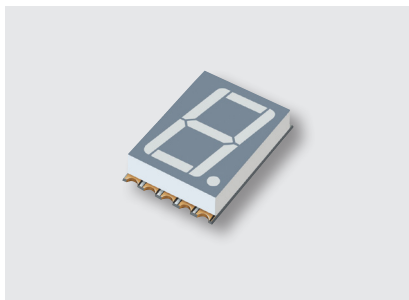


UNIT : mm

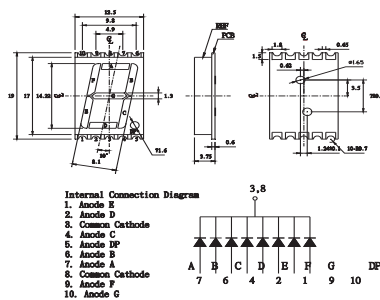

Product	Dimension (mm)		Color				CC/ CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SS511SURWA/S530-A3/S290	14.22 (0.5")	8.1	● Hyper Red	624	White	Gray	CC	15.0	34
SS511SYGWA/S530-E2/S290	14.22 (0.5")	8.1	● Brilliant Yellow Green	573	White	Gray	CC	4.0	8.9
SS511UBWA/C470	14.22 (0.5")	8.1	● Blue	470	White	Gray	CC	11.0	24.0

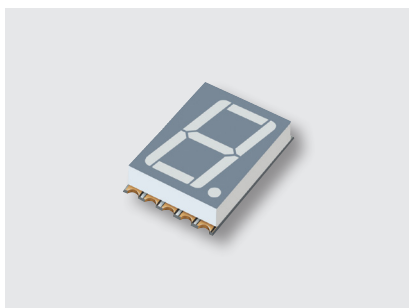


UNIT : mm

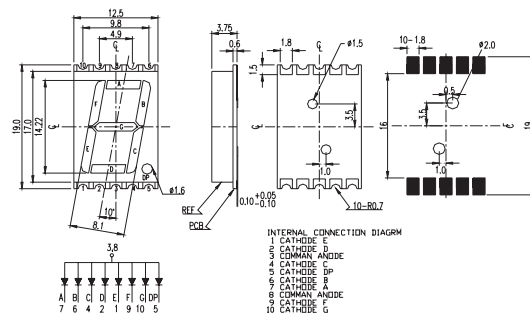


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segement Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SS512SURWA/S530-A3/S290	14.22 (0.5")	8.1	● Brilliant Red	624	White	Gray	CA	11.0	24
SS512SYGWA/S530-E2	14.22 (0.5")	8.1	● Brilliant Yellow Green	573	White	Gray	CA	4.0	8.9


LED Digital Displays | SMD Display | Dual Digit Display

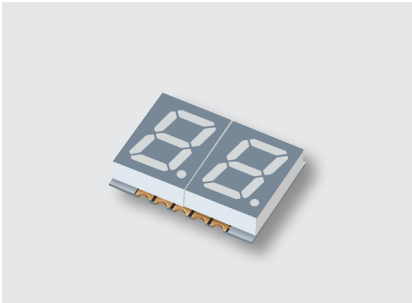


UNIT : mm

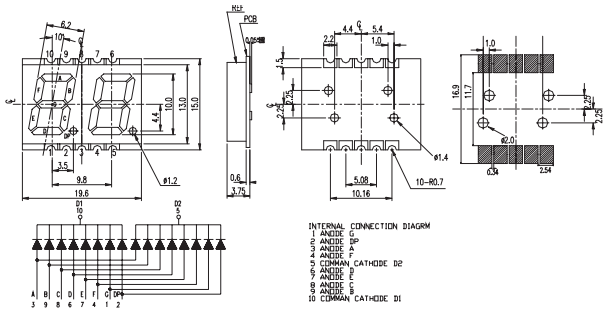


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SD405SURWA/S530-A3/S290	10 (0.4")	6.2	● Brilliant Red	624	White	Gray	CC	7.8	17.6
SD405SYGWA/S530-E2	10 (0.4")	6.2	● Brilliant Yellow Green	573	White	Gray	CC	5.6	12.5
SD405SDRWB/S530-A3/S968	10 (0.4")	6.2	● Deep Red	639	White	Black	CC	7.8	17.6

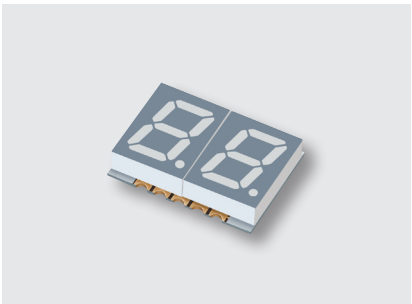


UNIT : mm

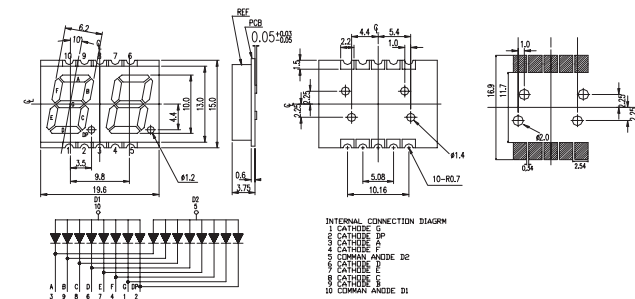

Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SD406SURWA/S530-A4/S290	10 (0.4")	6.2	● Brilliant Red	624	White	Gray	CA	7.8	17.6
SD406SYGWA/S530-E2/S290	10 (0.4")	6.2	● Brilliant Yellow Green	573	White	Gray	CA	5.6	12.5
SD406UWWA/S290	10 (0.4")	6.2	○ Pure White	X=0.270/0.310 Y=0.222/0.343	White	Gray	CA	30.0	67.0

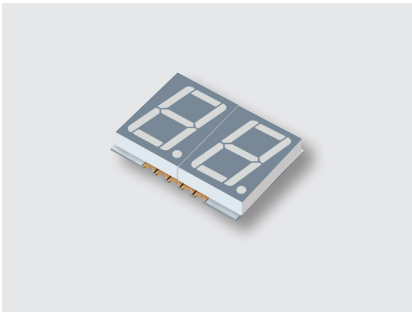


UNIT : mm

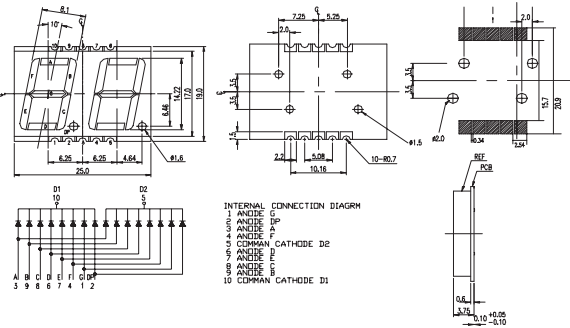


Product	Dimension (mm)		Color				CC/CA	I _v	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _v (mcd) min.	I _v (mcd) typ.
SD511SYGWA/S530-E2/S290	14.22 (0.5")	8.1	● Brilliant Yellow Green	573	White	Gray	CC	5.6	12.5

LED Digital Displays | SMD Display | Four Digit Display

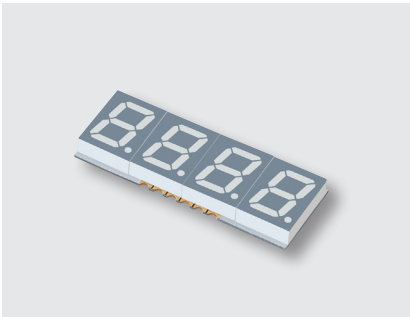


UNIT : mm

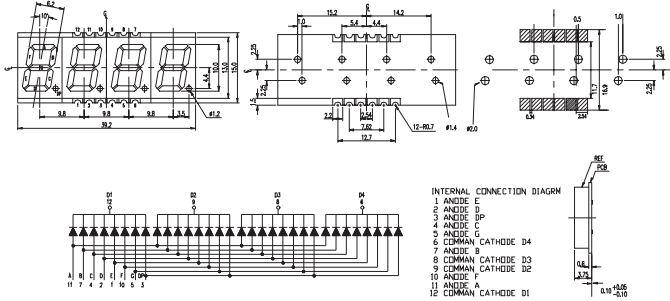

Product	Dimension (mm)		Color				CC/CA	I _V	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _V (mcd) min.	I _V (mcd) typ.
SF405SURWA/S530-A3/S290	10 (0.4")	6.2	● Brilliant Red	624	White	Gray	CC	7.8	17.6
SF405UYOWA/A3/S290	10 (0.4")	6.2	● Brilliant Orange	605	White	Gray	CC	11.0	24.0




UNIT : mm

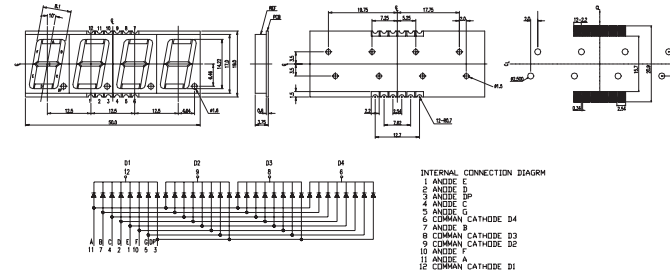

Product	Dimension (mm)		Color				CC/CA	I _V	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _V (mcd) min.	I _V (mcd) typ.
SF511SURWA/S530-A3/S290	14.22 (0.5")	8.1	● Brilliant Red	624	White	Gray	CC	11.0	24
SF511SYGWA/S530-E2/S796	14.22 (0.5")	8.1	● Brilliant Yellow Green	568.5~574.5	White	Gray	CC	4.0	8.9



UNIT : mm

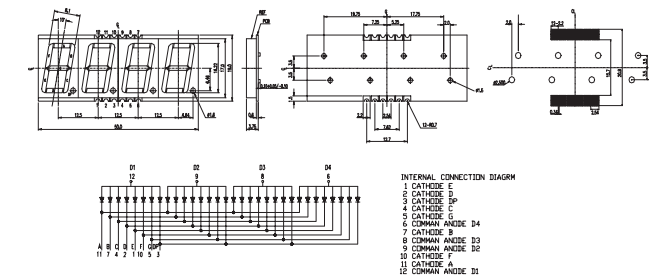


Product	Dimension (mm)		Color				CC/CA	I _V	
	Segment Height mm (inch)	Segment Width mm(inch)	Color	Wavelength (nm) / CIE	Resin Color	Face Color		I _V (mcd) min.	I _V (mcd) typ.
SF512SYGWA/S530-E2/S290	14.22 (0.5")	8.1	● Brilliant Yellow Green	573	White	Gray	CA	4.0	8.9
SF512SURWA/S530-A3/S290	14.22 (0.5")	8.1	● Brilliant Red	624	White	Gray	CA	11	24

LED Digital Displays

Signage LED | Surface Mount PLCC LED (Reflector) | Top View PLCC4



UNIT : mm




Product	Size (LxWxHmm)	Color		I _V		V _F		IF(mA)	View Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.		
HNB1515W-OS01	1.65 x 1.5 x 1.65	● Red	615~625	340	585	1.8	2.5	15	110
		● Green	515~525	550	940	2.5	3.3	8	110
		● Blue	460~475	70	130	2.5	3.3	5	110

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.



UNIT : mm

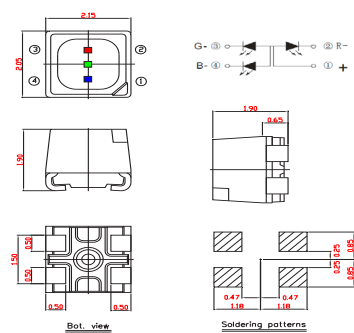


Product	Size (LxWxHmm)	Color		I _V		V _F		IF(mA)	View Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.		
HNB1921W-OS03	2.15 x 2.05 x 1.9	● Red	618~628	400	676	1.8	2.6	15	110
		● Green	515~535	692	1170	2.5	3.3	8	110
		● Blue	462~477	83	140	2.5	3.3	5	110

Signage LED | Surface Mount PLCC LED (Reflector) | Top View PLCC4



UNIT : mm

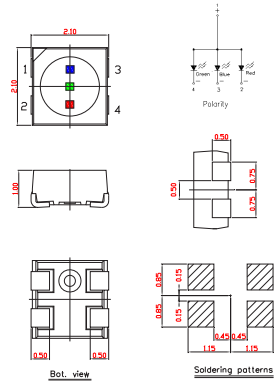


Product	Size (LxWxHmm)	Color		I _V		V _F		IF(mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.	
HNA2121W-IS01	2.1x2.1x1.0	● Red	615~630	185	408	1.8	2.5	15
		● Green	517~535	255	562	2.5	3.2	8
		● Blue	465~480	35	76	2.5	3.2	5

Signage LED | Surface Mount PLCC LED (Reflector) | Top View PLCC6




UNIT : mm




Product	Size (LxWxHmm)	Color		I _V		V _F		IF(mA)	View Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) max.	V _F (V) min.	V _F (V) max.		
HNB2727W-OS01-FM00	2.84 x 2.74 x 2.45	● Brilliant Red	615~630	300	800	1.8	2.5	15	110
		● Brilliant Green	515~540	450	1300	2.5	2.8	8	110
		● Blue	455~480	60	190	2.5	3.2	5	110

Signage LED

Signage LED ■ Surface Mount PLCC LED (Reflector) ■ Top View Full Color

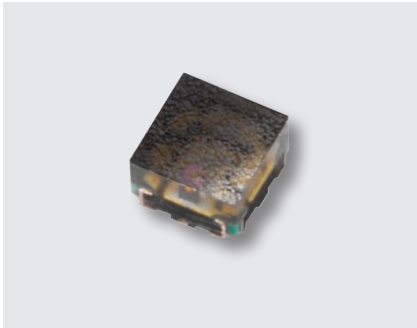

UNIT : mm

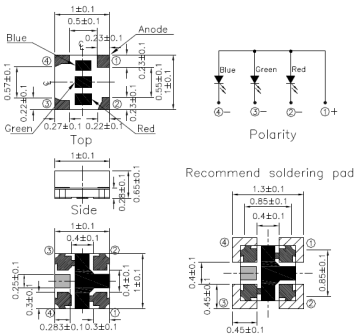


Product	Size (LxWxHmm)	Color		I _V			V _F			IF(mA)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.	
18-038BT/BDGAR6S1-FM03/38T	1.0x1.0x0.65	Red	615-630	10	-	30	1.6	-	2.4	5
	1.0x1.0x0.65	Green	520-545	20	-	50	2.2	-	3.4	2
	1.0x1.0x0.65	Blue	460-480	2.8	-	10	2.2	-	3.4	2
18-038FBT/BDGAR6S1-FM03/38T	1.0x1.0x0.65	Red	618~623	29	-	73	2.0	-	2.4	5
	1.0x1.0x0.65	Green	519~534	26	-	63	2.4	-	2.8	2
	1.0x1.0x0.65	Blue	464~479	5	-	13	2.6	-	3.0	2
18-038FABT/BDGAR6S1-FM04/38T	1.0x1.0x0.65	Red	615~625	20	-	60	1.9	-	2.4	5
	1.0x1.0x0.65	Green	520~540	20	-	60	2.4	-	2.8	2
	1.0x1.0x0.65	Blue	460~480	4	-	12	2.6	-	3.0	2

Signage LED | 3mm Oval Type




UNIT : mm

3474BAGR
3474BABR



3474BARR




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
3474BARR/MS	3.9x3x7.3	● Red	619~629	715	-	1573	1.6	-	2.6	15	X:110 Y: 60
3474BAGR/MS	3.9x3x7.3	● Green	520~535	1230	-	3515	2.4	-	3.4	10	X:110 Y: 60
3474BABR/MS	3.9x3x7.3	● Blue	460~475	240	-	685	2.4	-	3.4	10	X:110 Y: 60




UNIT : mm

3474BFGR
3474BFBR



3474BFRR




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
3474BFRR/MS	3.9x3x7.3	● Red	619~629	1205	1605	2490	1.6	-	2.6	20	X:110 Y: 60
3474BFGR/MS	3.9x3x7.3	● Green	520~535	2781	4635	5760	2.4	-	3.6	20	X:110 Y: 60
3474BFBR/MS	3.9x3x7.3	● Blue	460~475	550	800	1130	2.4	-	3.6	20	X:110 Y: 60

Signage LED | 3mm Oval Type




UNIT : mm

3474BKGR
3474BKBR



3474BKRR




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
3474BKRR/MS	3.9x3x7.3	● Red	619~629	1205	1605	2490	1.6	-	2.6	20	X:110 Y: 60
3474BKGR/MS	3.9x3x7.3	● Green	520~535	2781	4635	5760	2.4	-	3.4	20	X:110 Y: 60
3474BKBR/MS	3.9x3x7.3	● Blue	460~472	550	800	1130	2.4	-	3.4	20	X:110 Y: 60

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.




UNIT : mm

3474DKGR
3474DKBR



3474DKRR




Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
3474DKRR/MS	3.95x3x6.1	● Red	619~629	1976	2800	4600	1.6	-	2.6	20	X:90Y:45
3474DKGR/MS	3.95x3x6.1	● Green	520~535	5020	6480	12000	2.4	-	3.4	20	X:90Y:45
3474DKBR/MS	3.95x3x6.1	● Blue	460~475	934	1140	2130	2.4	-	3.4	20	X:90Y:45

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Signage LED | 5mm Oval Type



UNIT : mm

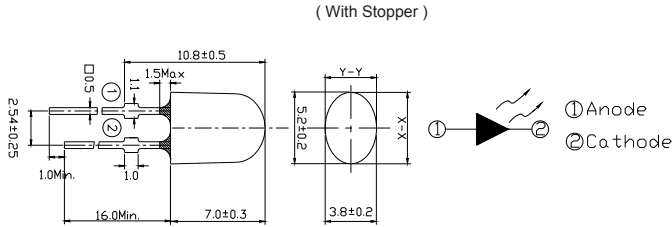


Product	Dimension (mm)	Color		I_V			V_F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I_V (mcd) min.	I_V (mcd) typ.	I_V (mcd) max.	V_F (V) min.	V_F (V) typ.	V_F (V) max.		
5484BN/R7DC-AHJB/P/MS	5.2x3.8x7	Red	619~628	1220	-	2040	1.8	-	2.4	20	X:110 Y: 40
5484BN/GADC-AMNA/P/MS	5.2x3.8x7	Green	525~535	2880	-	2970	2.8	-	3.6	20	X:110 Y: 40
5484BN/BADC-AGJA/P/MS	5.2x3.8x7	Blue	465~475	720	-	1450	2.8	-	3.6	20	X:110 Y: 40

Signage LED | 5mm Round Type




UNIT : mm

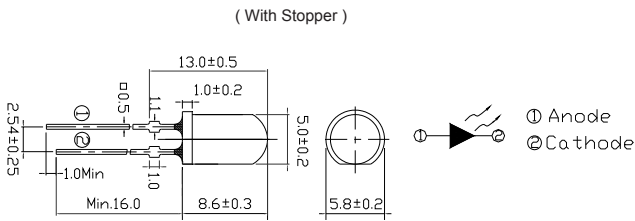


Product	Dimension (mm)	Color		I_V			V_F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I_V (mcd) min.	I_V (mcd) typ.	I_V (mcd) max.	V_F (V) min.	V_F (V) typ.	V_F (V) max.		
333/Y5C1-ATWB/MS	5.8 x 5 x 8.6	Yellow	586~594	7150	-	18000	1.8	2	2.6	20	15
333/G1C1-AVYA/MS	5.8 x 5 x 8.6	Green	525~535	18000	28500	45000	2.8	3.2	3.6	20	15
333/B1C1-ARUA/MS	5.8 x 5 x 8.6	Blue	465~470	4500	7150	11250	2.8	3.2	3.6	20	15


Signage LED ■ 5mm Round Type

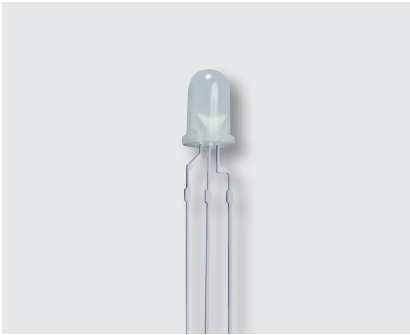


UNIT : mm

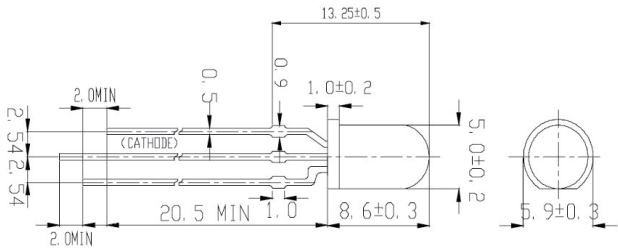

Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
339-9SUGSURSUBW/S1182/MS	5	Brilliant Red	620~628	1800	-	4500	1.6	2.0	2.4	20	65
	5	Brilliant Green	525~535	1800	-	4500	2.8	3.2	3.6	20	65
	5	Blue	465~475	1800	-	4500	2.8	3.2	3.6	20	65

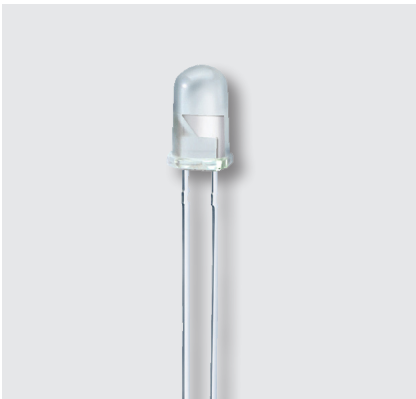

UNIT : mm

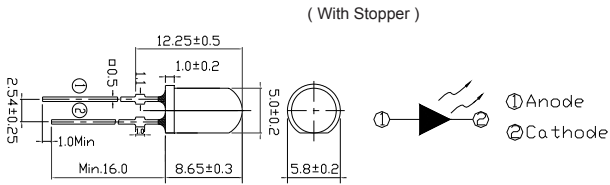


Product	Dimension (mm)	Color		I _V			V _F			IF (mA)	Viewing Angle(°)
		Color	Wavelength nm / CIE	I _V (mcd) min.	I _V (mcd) typ.	I _V (mcd) max.	V _F (V) min.	V _F (V) typ.	V _F (V) max.		
7383/R7C3-ARUB/MS	5.8 x 5 x 8.65	Red	619~628	4500	7150	11250	1.8	2.0	2.6	20	30
7383/Y7C3-ARUB/MS	5.8 x 5 x 8.65	Yellow	586~594	4500	7150	11250	1.8	2.0	2.6	20	30
7383/G1C3-ATVA/MS	5.8 x 5 x 8.65	Green	525~535	7150	9000	14250	2.8	-	3.6	20	30
7383/BAC3-ANQA/MS	5.8 x 5 x 8.65	Blue	465~475	2250	2850	4500	2.8	-	3.6	20	30
7383/V7C3-ARTA/MS	5.8 x 5 x 8.65	Bluish Green	498~513	4500	6300	9000	2.8	-	3.6	20	30
7343/R5C2-ASUB/MS	5.8 x 5 x 8.65	Red	620~628	5650	7150	11250	1.8	2	2.6	20	23
7343/Y5C2-ASVB/MS	5.8 x 5 x 8.65	Yellow	586~594	5650	9000	14250	1.8	2.2	2.6	20	23
7344/V7C2-ASVA/MS	5.8 x 5 x 8.65	Bluish Green	498~513	5650	-	14250	2.8	3.2	3.6	20	23
7343/B1C2-APSA/MS	5.8 x 5 x 8.65	Green	465~475	5650	-	14250	2.8	3.2	3.6	20	23

Automotive LED ■ Interior Lighting



UNIT : mm

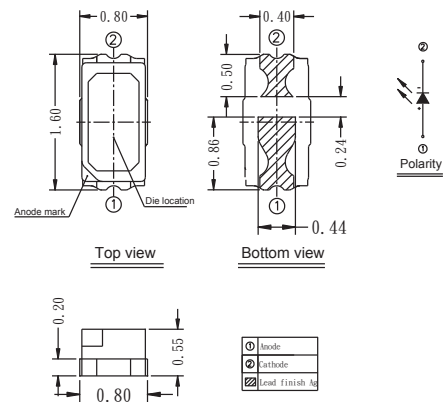


EL 1608

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
1608-C70100M-AM	1	1.6x0.8x0.55	○ White	0.288,0.27	-	970	2.85	10
1608-UY0100M-AM	1	1.6x0.8x0.55	● Yellow	-	588	370	2.1	10
1608-UR0100M-AM	1	1.6x0.8x0.55	● Red	-	617	350	2.1	10
1608-SR0100M-AM	1	1.6x0.8x0.55	● Super Red	-	630	210	2.1	10
1608-UB0100M-AM	1	1.6x0.8x0.55	● Blue	-	462	150	2.9	10
1608-UG0100M-AM	1	1.6x0.8x0.55	● Green	-	525	700	2.65	10
1608-IB0100M-AM	1	1.6x0.8x0.55	● Ice Blue	0.20,0.25	-	650	3.0	10



UNIT : mm

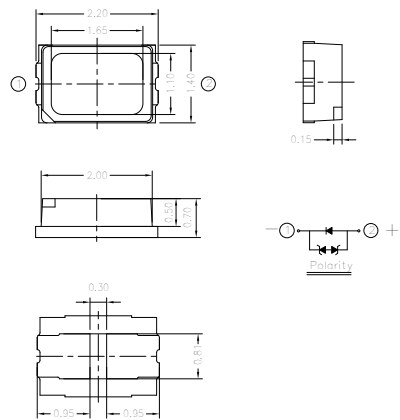


EL 2214

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
2214-C70201M-AM	1	2.2x1.4x0.7	○ White	0.315,0.315	-	1200	2.9	20
2214-C70301H-AM	1	2.2x1.4x0.7	○ White	0.3,0.32	-	3000	3.0	30
2214-PA0201H-AM	1	2.2x1.4x0.7	● PC-Amber	0.56,0.43	-	1100	2.9	20

Automotive LED | Interior Lighting



UNIT : mm

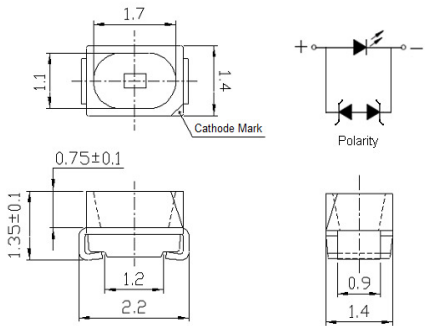


EL Mini Top View

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
65-11-C70200H-AM	1	2.2x1.4x1.35	○ White	0.3, 0.3	-	1800	3.1	20
65-11-IB0100L-AM	1	2.2x1.4x1.35	○ Ice Blue	0.18, 0.23	-	355	3.1	10
65-11-SB0100L-AM	1	2.2x1.4x1.35	● Sky Blue	0.16, 0.08	-	300	3.1	10
65-11-UB0200L-AM	1	2.2x1.4x1.35	● Blue	-	468	355	3.1	20
65-11-UG0200H-AM	1	2.2x1.4x1.35	● Green	-	523	1400	3.1	20
65-21-UR0200H-AM	1	2.2x1.4x1.35	● Red	-	622	1120	2	20
65-21-UY0200H-AM	1	2.2x1.4x1.35	● Yellow	-	592	1120	2	20




UNIT : mm

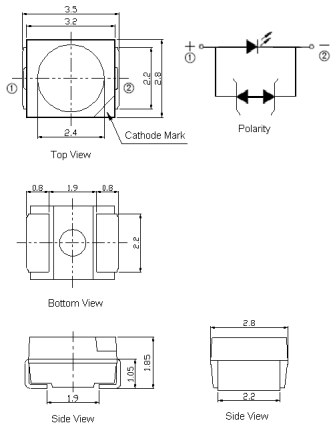


EL Top View

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
67-11-C70200H-AM	1	3.5x2.8x1.85	○ White	0.3, 0.3	-	1800	3.1	20
67-11-C70100H-AM	1	3.5x2.8x1.85	○ White	0.3, 0.3	-	1800	3.1	10
67-11-IB0100L-AM	1	3.5x2.8x1.85	○ Ice Blue	0.18, 0.23	-	355	3.1	10
67-11-SB0100L-AM	1	3.5x2.8x1.85	● Sky Blue	0.16, 0.08	-	300	3.1	10
67-11-UB0200H-AM	1	3.5x2.8x1.85	● Blue	-	468	355	3.1	20
67-11-UG0200H-AM	1	3.5x2.8x1.85	● Green	-	523	1400	3.1	20
67-21-UR0200H-AM	1	3.5x2.8x1.85	● Red	-	623	1120	2	20
67-21-UY0200H-AM	1	3.5x2.8x1.85	● Yellow	-	590	1120	2	20

Automotive LED | Interior Lighting

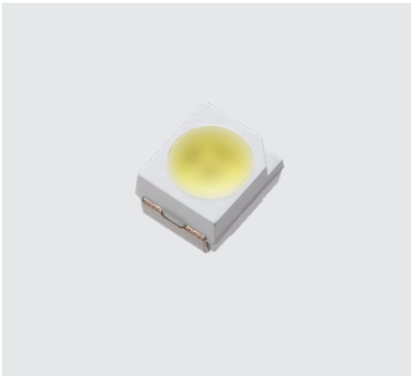

UNIT : mm

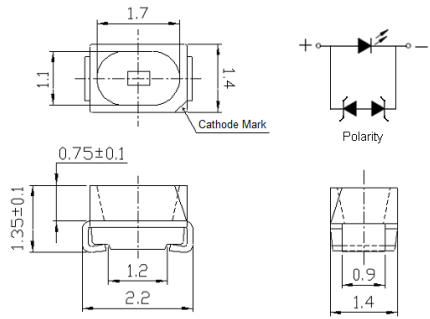


EL Top View 2835

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
67-11S-G81000H-AM	1	2.8x3.5x0.7	○ White	0.33,0.34	-	42	2.8	100
67-11S-PA1500H-AM	1	2.8x3.5x0.7	● PC-Amber	0.57,0.41	-	44	3.1	150
67-11S-IB0600H-AM	1	2.8x3.5x0.7	● Ice Blue	0.168,0.225	-	21	3	60

Automotive LED ■ Interior Lighting



UNIT : mm

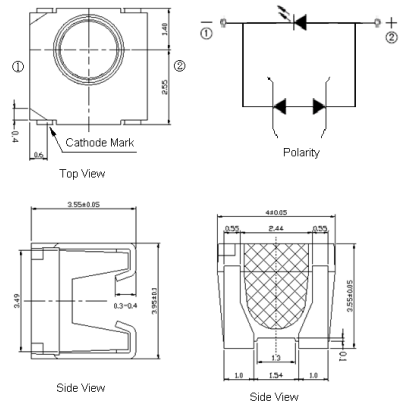


EL Side View

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
57-11-C70200H-AM	1	4.0x4.0x3.6	○ White	0.3,0.3	-	1800	3	20
57-11-IB0100L-AM	1	4.0x4.0x3.6	○ Ice Blue	0.19,0.25	-	355	2.9	10
57-11-SB0100L-AM	1	4.0x4.0x3.6	● Sky Blue	0.16,0.08	-	355	3	10
57-11-UB0200H-AM	1	4.0x4.0x3.6	● Blue	-	468	355	3.1	20
57-21-UR0200H-AM	1	4.0x4.0x3.6	● Red	-	622	1120	2	20
57-21-UY0200H--AM	1	4.0x4.0x3.6	● Yellow	-	590	1120	2	20



UNIT : mm

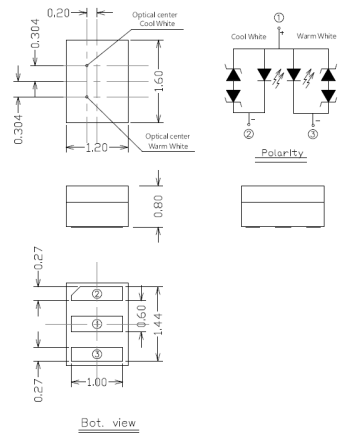


EL Micro Multi

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
CH1216-C8W80801H-AM	2	1.6x1.2x0.8	○ Cool White	0.322,0.336	25	3.0	80
			● Warm White	0.466,0.422	22	3.0	80

Automotive LED ■ Ambient Lighting


UNIT : mm

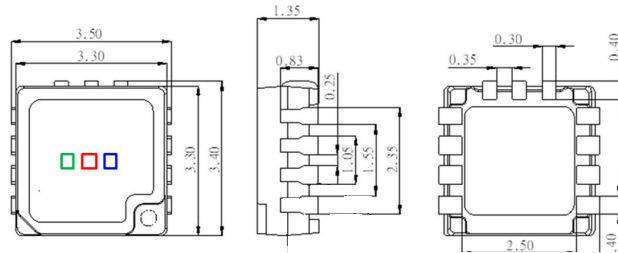

SMART RGB

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
EL3534-RGBISE0141L-8H-AM	3	3.5x3.4x1.35	Red	White: CIE x = 0.3127, CIE y = 0.3290 0.3,0.3	615	400	5	12.5
			Green		530	900	5	9.5
			Blue		468	100	5	7
			White		-	1400	5	26
EL3534-RGBISE0201H-8H-AM	3	3.5x3.4x1.35	Red	White: CIE x = 0.3127, CIE y = 0.3290 0.3,0.3	620	600	5	12.5
			Green		530	1250	5	14.5
			Blue		468	150	5	9.5
			White		-	2000	5	34

UNIT : mm

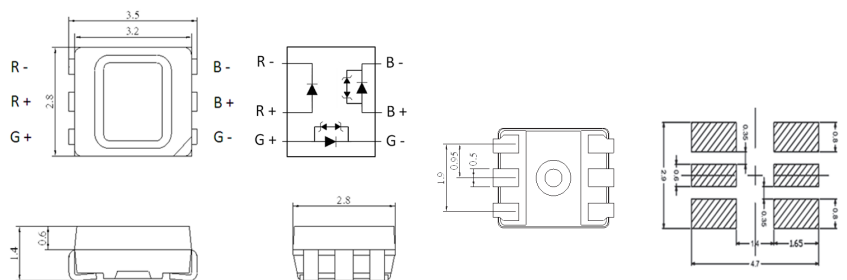


EL Top View RGB

Product	Chip quantity	Dimension (mm)	Color	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
67-63-RGB0201H-AM	3	3.5x2.8x1.4	● Red	623	710	1.95	20
			● Green	527	1400	3.1	20
			● Blue	451	280	3.0	20

Automotive LED | Ambient Lighting


UNIT : mm

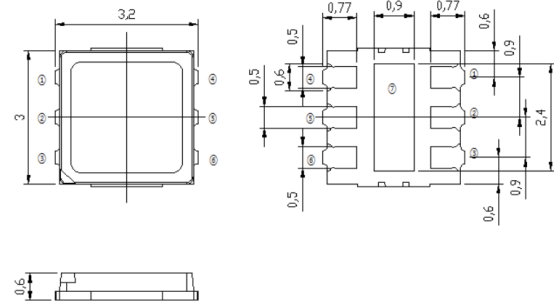

EL Top View 3030

Product	Chip quantity	Dimension (mm)	Color	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
XI3030-RGB200BH-AM	3	3.0x3.0x0.6	Red	617	30	2.24	200
			Green	520	44	3.0	200
			Blue	456	10	3.5	200

UNIT : mm

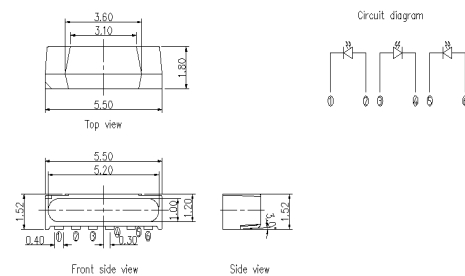


ELSide View 5515

Product	Chip quantity	Dimension (mm)	Color	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
5515-RGB020AH-AM	3	5.5x1.5x0.8	Red	621	1120	2	20
			Green	527	2800	2.75	20
			Blue	467	450	3	20

Automotive LED ■ Ambient Lighting



UNIT : mm

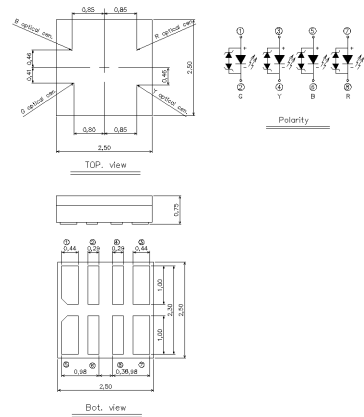


EL Multi Color

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
CH2525E-RGBW0401H-AM	4	2.5x2.5x0.75	● Red	-	627	1050	1.95	40
			● Green	-	520	2900	2.66	40
			● Blue	-	460	550	2.78	40
			○ White	White: CIE x = 0.313, CIE y = 0.307	-	3300	2.82	40

Automotive LED ■ Exterior Lighting



UNIT : mm

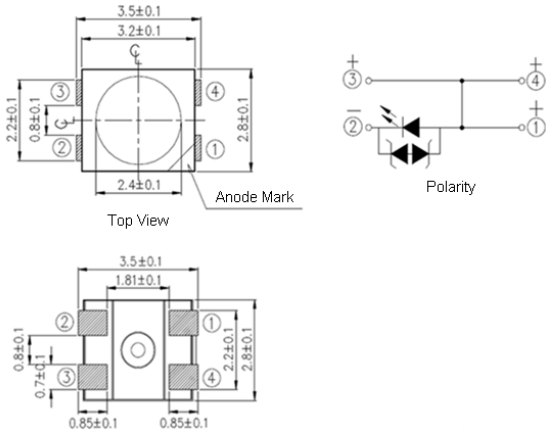


PLCC4

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
67-41-C70301H-AM	1	3.5*2.8*1.85	○ White	0.33,0.34	-	2800	3.1	30
67-41-PA0601H-AM	1	3.5*2.8*1.85	● PC-Amber	0.57,0.42	-	3500	3.1	60
67-41-UR0501H-AM	1	3.5*2.8*1.85	● Red	-	615	2800	2.2	50
67-41-UY0501H-AM	1	3.5*2.8*1.85	● Yellow	-	590	2240	2.2	50
67-41-SR0501H-AM	1	3.5*2.8*1.85	● Super Red	-	590	1500	2.2	50
67-41-UR0502H-AM	1	3.5*2.8*1.85	● Red	-	615	3000	2.2	50



UNIT : mm

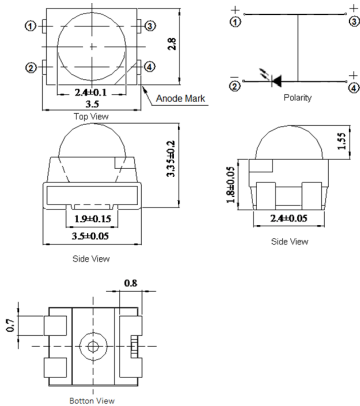


PLCC3 LENS

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
67-31EP3-UY0500H-AM	1	3.5x2.8x3.35	● Super Red	-	590	12000	2	50
67-31EP3-UR0500H-AM	1	3.5x2.8x3.35	● Red	-	616	12000	2	50

Automotive LED | Exterior Lighting



UNIT : mm

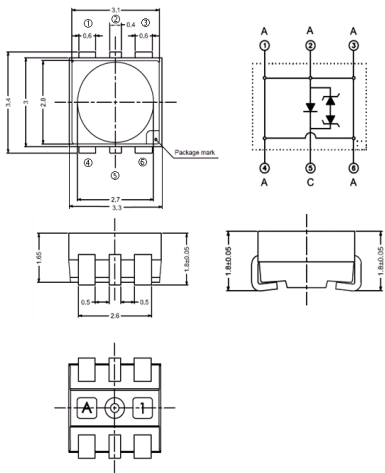


EL Advanced Power Top View

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
A09K-C71501H-AM	1	3.4x3.4x1.8	○ White	0.33,0.34	-	12500	3.1	150
A09K-PA1501H-AM	1	3.4x3.4x1.8	● PC-Amber	0.57,0.42	-	7700	3.1	150
A09K-UR1501H-AM	1	3.4x3.4x1.8	● Red	-	613	8800	2.2	150
A09K-SR1501H-AM	1	3.4x3.4x1.8	● Super Red	-	629	5600	2.2	150
A09K-UY1501H-AM	1	3.4x3.4x1.8	● Yellow	-	589	7100	2.2	150



UNIT : mm

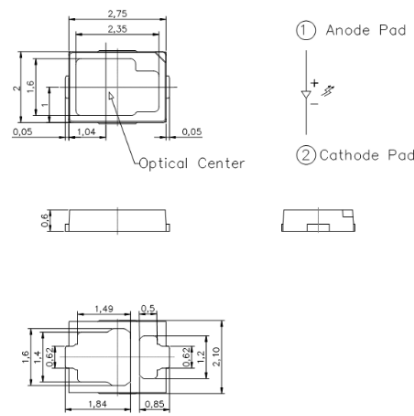


EL 2820

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
2820-UY2001M-AM	1	2.8x2.0x0.6	● Yellow	-	590	33	2.3	200
2820-UR2001M-AM	1	2.8x2.0x0.6	● Red	-	618	40	2.3	200
2820-SR2001M-AM	1	2.8x2.0x0.6	● Super Red	-	630	27	2.3	200
2820-C03501H-AM	1	2.8x2.0x0.6	○ White	0.3,0.3	-	110	2.3	350
2820-PA3001H-AM	1	2.8x2.0x0.6	● PC-Amber	2.75,3.75	-	60	2.3	300
2820-UY3501H-AM	1	2.8x2.0x0.6	● Yellow	-	590	54	2.3	350
2820-UR3501H-AM	1	2.8x2.0x0.6	● Red	-	618	76	2.5	350
2820-SR3501H-AM	1	2.8x2.0x0.6	● Super Red	-	630	50	2.5	350

Automotive LED | Exterior Lighting



UNIT : mm

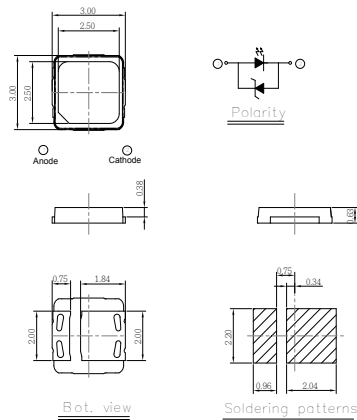


Suggested pad dimension is just reference only.
Please modify the pad dimension based on individual need.

EL 3030

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
XI3030-C01501M-AM	1	3.0x3.0x0.63	○ White	0.332,0.332	-	60	3.1	150
XI3030-PA1501M-AM	1	3.0x3.0x0.63	● PC-Amber	0.57,0.42	-	42	2.9	150
XI3030-C03501H-AM	1	3.0x3.0x0.63	○ White	0.325,0.334	-	150	3.1	350
XI3030-PA3501H-AM	1	3.0x3.0x0.63	● PC-Amber	0.57,0.42	-	92	3.1	350
XI3030-UR3501H-AM	1	3.0x3.0x0.63	● Red	-	610	90	2.2	350
XI3030-SR3501H-AM	1	3.0x3.0x0.63	● Super Red	-	630	43	2.2	350



UNIT : mm

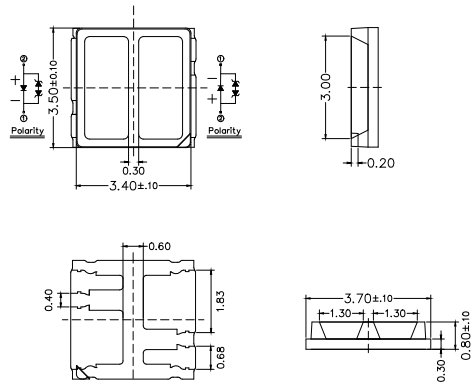


EL 3735

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Brightness (mcd)	Forward Voltage (V)	Driving current (mA)
3735-C8PA1501H-AM	2	3.7x3.5x0.8	○ White	0.3, 0.3	60	3	150
			● PC-Amber	0.57, 0.42	40	3	150
3735-C8PA2501H-AM	2	3.7x3.5x0.8	○ White	0.3, 0.3	81	3	250
			● PC-Amber	0.57, 0.42	46	3	250


Automotive LED | Exterior Lighting




UNIT : mm

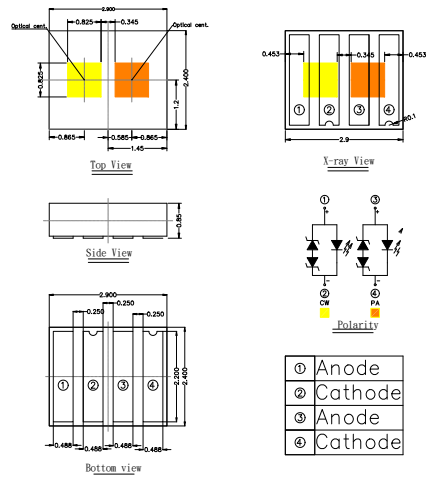

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
CH2924-C0PA3501H-AM	2	2.9x2.4x0.85	○ White	0.3,0.3	-	140	3	350
	2	2.9x2.4x0.85	● PC-Amber	0.57,0.42	-	82	3	350

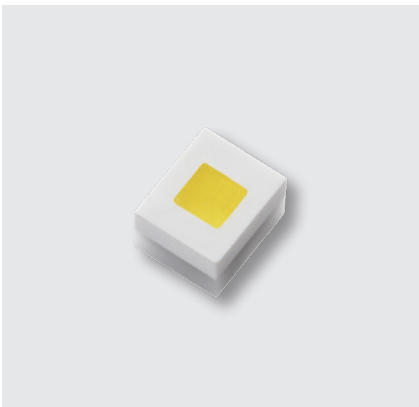


UNIT : mm

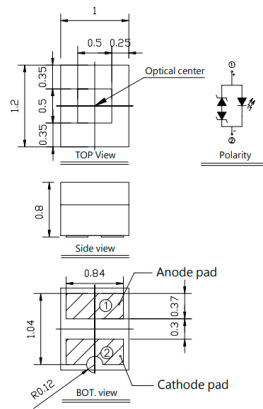


EL 1210

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ (x,y)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
CH1210E-C80401H-AM	1	1.2x1.0x0.8	○ White	0.3,0.3	13	2.87	40
CH1210E-N80401H-AM	1		○ White	0.38,0.38	13	2.87	40
CH1210E-PA0801H-AM	1		● PC-Amber	0.57, 0.42	18	3	80
CH1210E-PR0801H-AM	1		● PC Red	0.66, 0.335	11	3	80

Automotive LED | Exterior Lighting

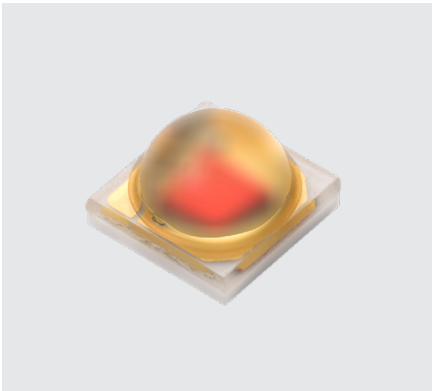


UNIT : mm

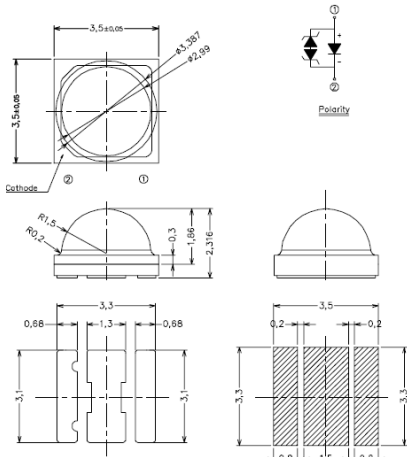


EL 3535E

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
CH3535E-UR3501L-AM	1	3.5x3.5x2.3	● Red	-	619	75	2.22	350
CH3535E-SR3501L-AM	1	3.5x3.5x2.3	● Super Red	-	630	57	2.15	350

Automotive LED ■ Exterior Lighting

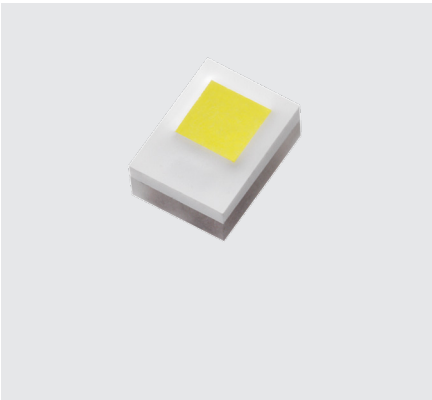

UNIT : mm

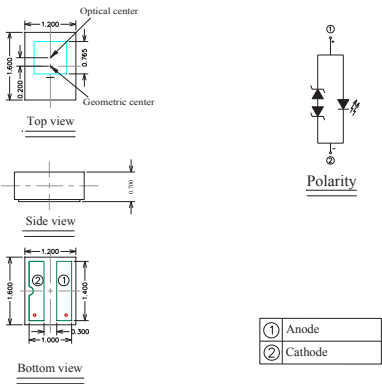


ALFS E series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS1E-C07001H-AM	1	1.2x1.6x0.7	○ White	0.3,0.3	-	285	3.2	700
ALFS1E-PA07001H-AM	1	1.2x1.6x0.7	● PC-Amber	0.57,0.42	-	140	3.3	700



UNIT : mm

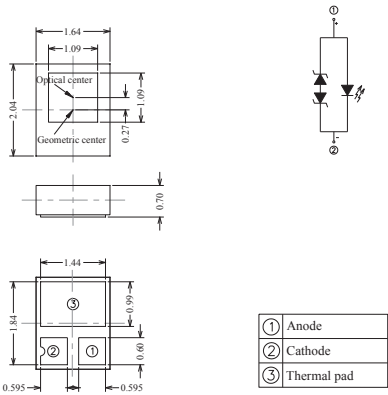


ALFS G series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS1G-C010001H-AM	1	2x1.6x0.7	○ White	0.3,0.3	-	425	3.3	1000
ALFS1G-PA10001H-AM	1	2x1.6x0.7	● PC-Amber	0.57,0.42	-	240	3.3	1000

Automotive LED ■ Exterior Lighting



UNIT : mm

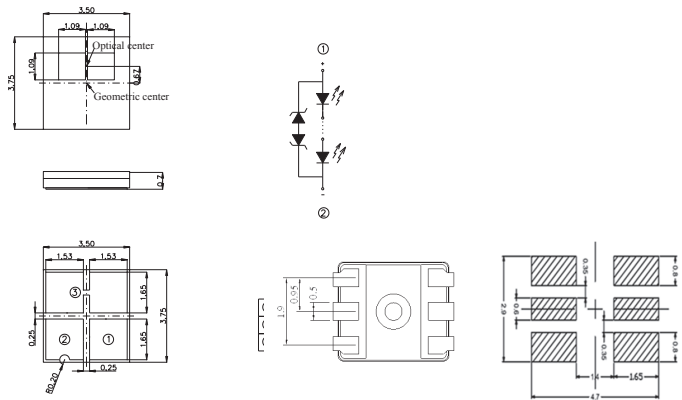


ALFS G series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS2G-C010001H-AM	2	3.75x3.5x0.7	○White	0.3,0.3	-	850	6.7	1000



UNIT : mm

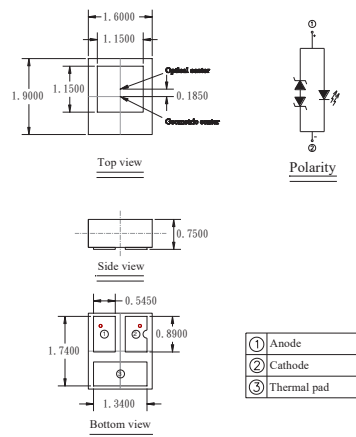


ALFS H series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS1H-C010001H-AM	1	1.9x1.6x0.7	○White	0.3,0.3	-	500	3.3	1000

Automotive LED ■ Exterior Lighting



UNIT : mm

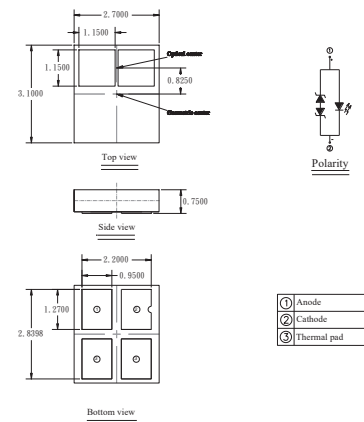


ALFS H series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS2H-C010001H-AM	2	3.1x2.7x0.7	○White	0.3,0.3	-	1000	6.7	1000



UNIT : mm

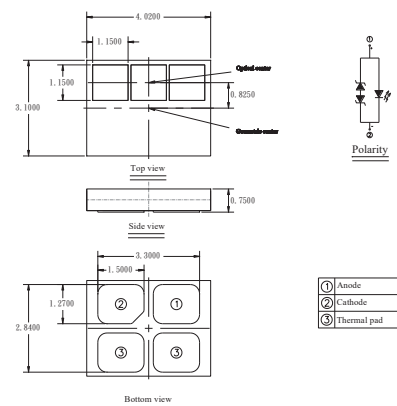


ALFS H series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS3H-C010001H-AM	3	3.1x3.9x0.7	○White	0.3,0.3	-	1500	9.8	1000

Automotive LED ■ Exterior Lighting



UNIT : mm

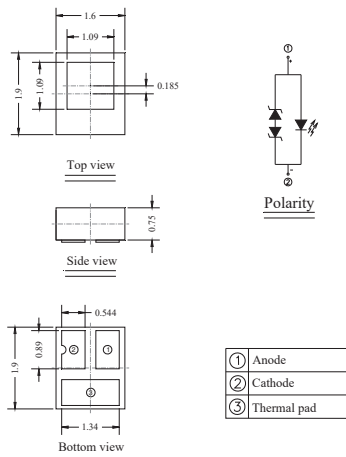


ALFS J series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS1J-C010001H-AM	1	1.9x1.6x0.7	○ White	0.3,0.3	-	460	3.3	1000



UNIT : mm

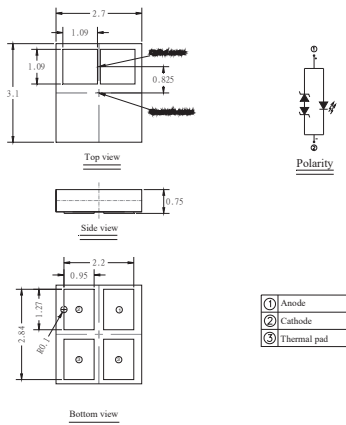


ALFS J series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS2J-C010001H-AM	2	3.1x2.7x0.7	○ White	0.3,0.3	-	920	6.7	1000

Automotive LED ■ Exterior Lighting




UNIT : mm

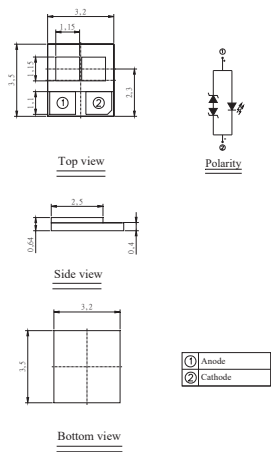


ALFS HT series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS2HT-C010001H-AM	2	3.5x3.2x0.75	○ White	0.3,0.3	-	1380	6.5	1000

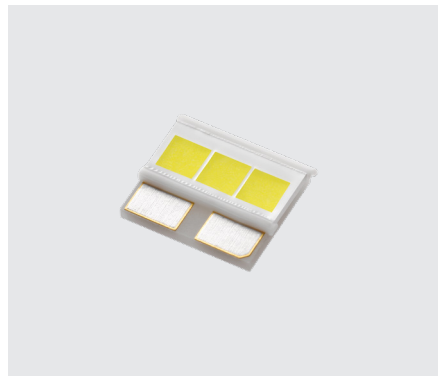


UNIT : mm

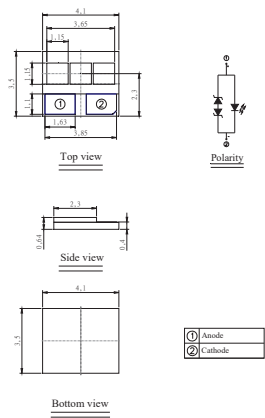


ALFS HT series

Product	Chip quantity	Dimension (mm)	Color	Chromaticity Coordinate Typ(x,y)	Wavelength (nm)	Brightness (lm)	Forward Voltage (V)	Driving current (mA)
ALFS3HT-C010001H-AM	3	3.5x4x0.75	○ White	0.3,0.3	-	1380	9.75	1000

Backlighting LED | Direct type Product

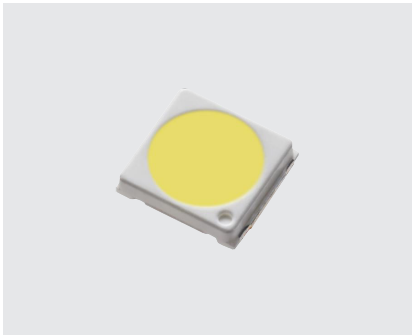

UNIT : mm

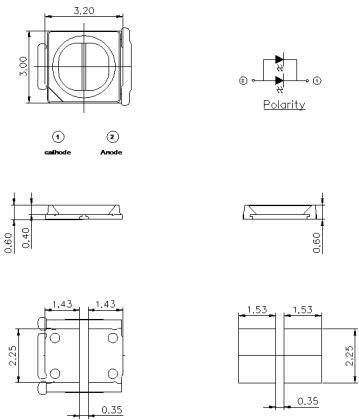


Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-3030GN2E	3.0x3.0x0.6	○ White	1.8	X=0.2735, Y=0.2293	175-195	3.0-3.6	120

Backlighting LED | Edge Type Product




UNIT : mm

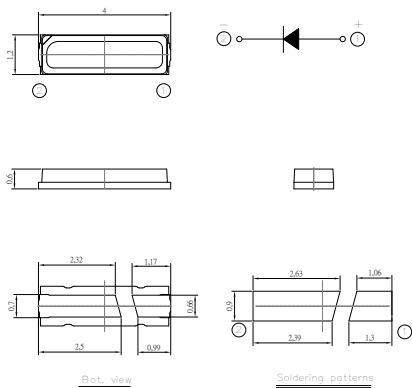


4012

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-4012NN1T	4.0x1.2x0.6	○ White	0.4	X=0.28, Y=0.26	36-46	2.7-3.4	120

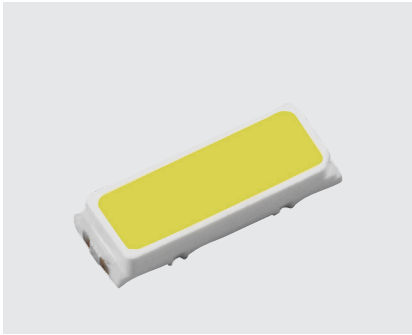

UNIT : mm

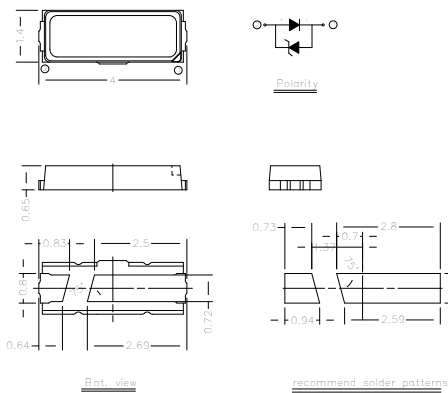


4014

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-4014CZ1T	4.0x1.4x0.65	○ White	0.4	X=0.28, Y=0.26	38-48	2.7-3.4	120

Backlighting LED ■ Edge Type Product



UNIT : mm

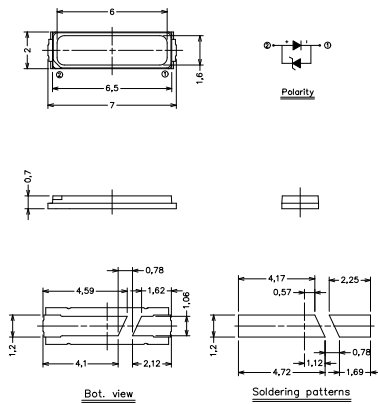


7020

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-7020NZ1T	7.0x2.0x0.7	○ White	0.4	X=0.29, Y=0.29	47-51	2.7-3.4	120



UNIT : mm

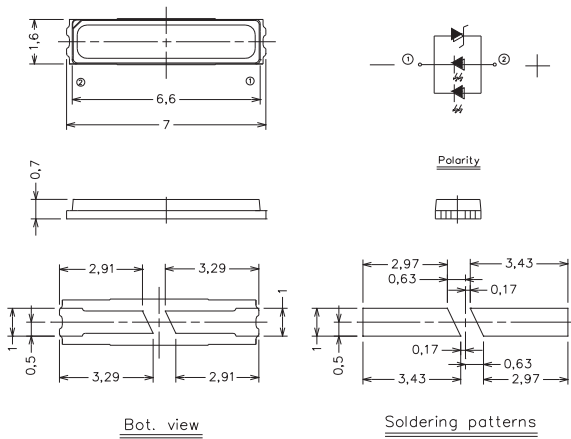


7016

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-7016NZ2T	7.0x1.6x0.7	○ White	0.4	X=0.28, Y=0.26	86-96	2.7-3.4	120

Backlighting LED ■ Side View Product




UNIT : mm

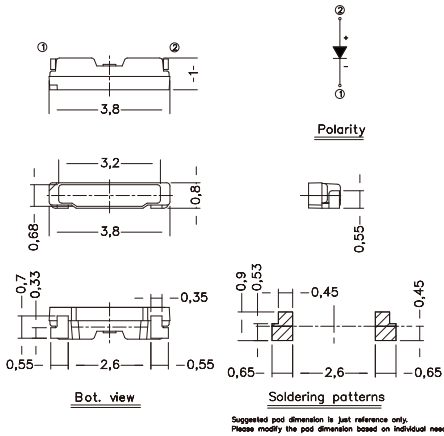

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-3808Z1P	3.8x1.0x0.8	○White	0.06	X=0.295, Y=0.28	6.00-8.00	2.7-3.4	120




UNIT : mm

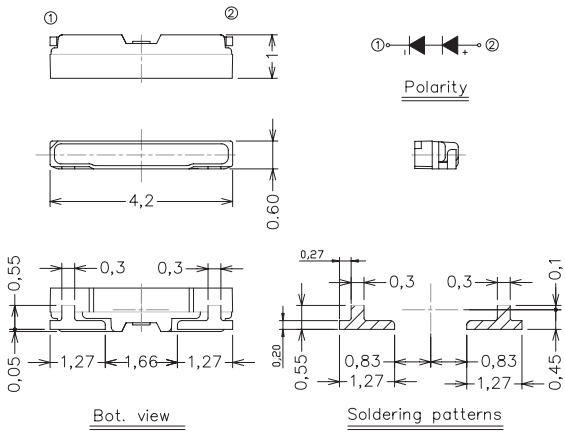

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-4206SN2P	4.2x1.0x0.6	○White	0.12	X=0.295, Y=0.28	14-17	5.4-6.8	120



UNIT : mm

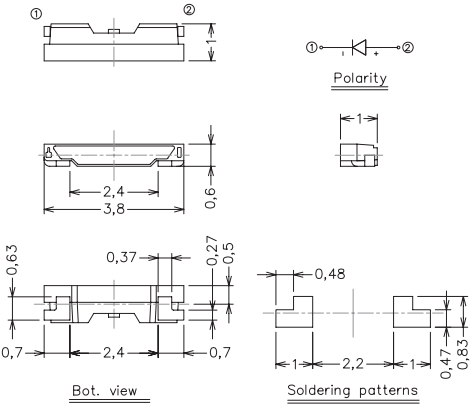


Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-3806NN1P	3.8x1.0x0.6	○White	0.06	X=0.295, Y=0.28	6.0 0-9.5	2.7-3.4	120

Backlighting LED ■ Side View Product




UNIT : mm

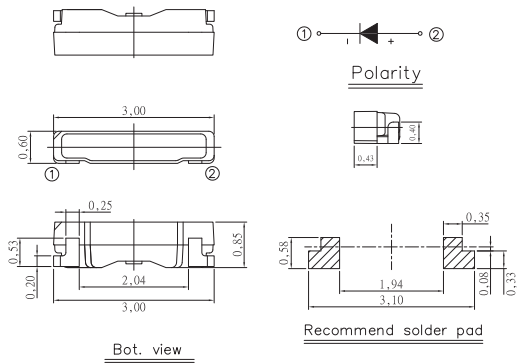

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	lv(lm,mW)	VF(V)	Viewing Angle(°)
BL-3006NN1P	3.0x0.85x0.6	○ White	0.06	X=0.295, Y=0.28	6.75-9.00	2.7-3.4	120




UNIT : mm

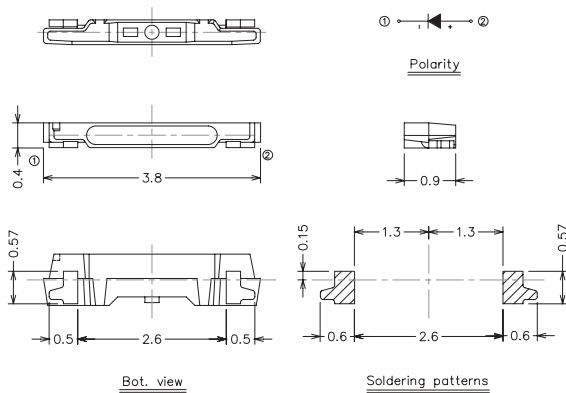

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	lv(lm,mW)	VF(V)	Viewing Angle(°)
BL-3804GN1P	3.8x0.9x0.4	○ White	0.06	X=0.295, Y=0.28	6.25-9.00	2.7-3.4	120



UNIT : mm

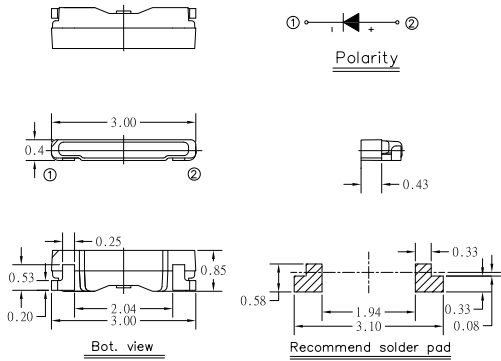


Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	lv(lm,mW)	VF(V)	Viewing Angle(°)
BL-3004TN1P	3.0x0.85x0.4	○ White	0.06	X=0.295, Y=0.28	6.25-8.50	2.7-3.4	115

Backlighting LED ■ Side View Product




UNIT : mm

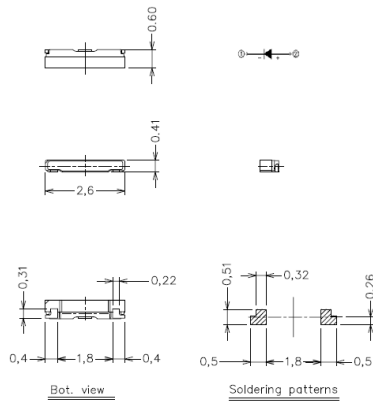

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-2604DN1P	2.6x0.7x0.4	○ White	0.06	X=0.295, Y=0.28	5.50-8.25	2.7-3.4	115




UNIT : mm

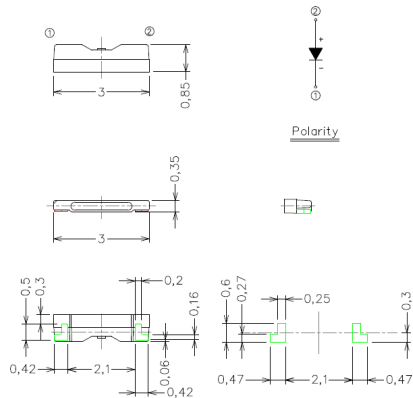

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-3003LM2C	3.0x0.85x0.3	○ White	0.06	X=0.295, Y=0.28	5.25-7.75	2.7-3.4	115


Backlighting LED ■ Automotive Product

UNIT : mm

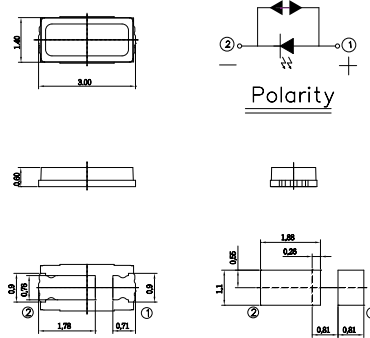


Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BLA-3014PZ1U	3.0x1.4x0.6	○ White	0.25	X=0.277, Y=0.247	22-40	2.7-3.4	120

UNIT : mm

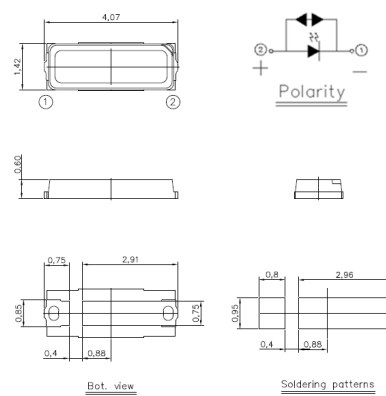

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BLA-4014PZ1E	4.0x1.4x0.6	○ White	0.4	X=0.277, Y=0.247	22-56	2.7-3.4	120

UNIT : mm

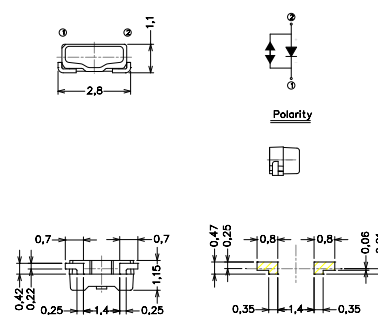


Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BLA-2810NZ1T	2.8x1.15x1.1	○White	0.25	X=0.277, Y=0.247	20-38	2.7-3.4	120


Backlighting LED ■ Automotive Product




UNIT : mm

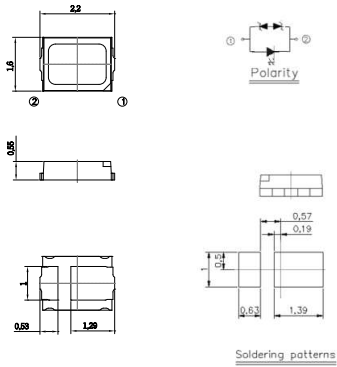

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BLA-2016NZ1THBC	2.0x1.6x0.55	○White	0.03	X=0.2735, Y=0.2293	2.3-4.3	2.6-2.85	120

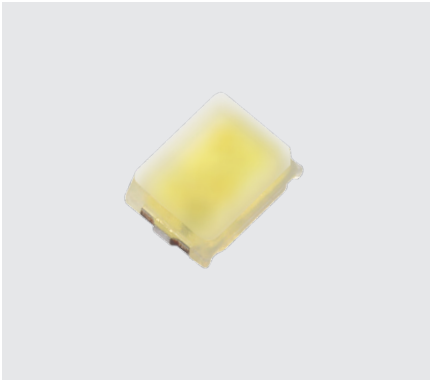

UNIT : mm

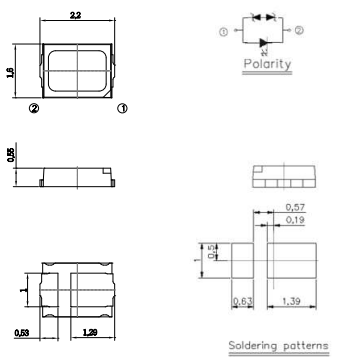


Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BLA-2016NZ1CTHBC	2.0x1.6x0.55	○White	0.03	X=0.2735, Y=0.2293	2.0-4.0	2.6-2.85	130

Backlighting LED ■ Automotive Product




UNIT : mm

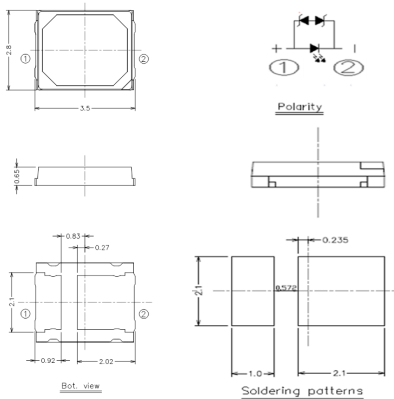

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BLA-2835NZ1THBC	3.5x2.8x0.7	○White	0.03	X=0.2735, Y=0.2293	3.25-4.5	2.6-2.85	120




UNIT : mm

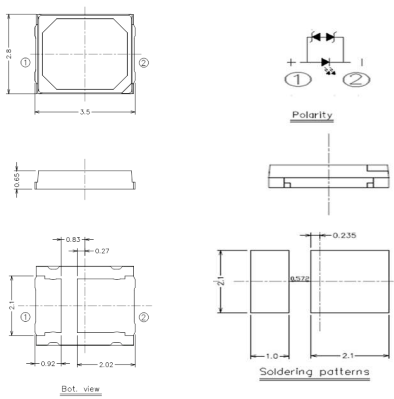

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BLA-2835NZ1CTHBC	3.5x2.8x0.7	○White	0.03	X=0.2735, Y=0.2293	2.75-4	2.6-2.85	130



UNIT : mm

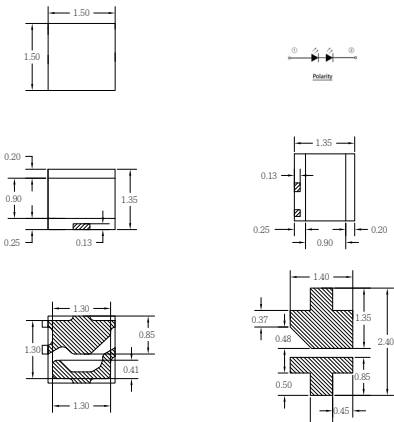


Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BLA-1515WRON2EMHBC	1.5x1.5x1.35	○White	0.08	X=0.2735, Y=0.2293	7-13	5.1~5.6	180

Backlighting LED ■ Local Dimming Product




UNIT : mm



Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-2016NN1T	2.0x1.6x0.55	Blue	0.03	447.5~457.5	8-20mW	2.5-3	120



UNIT : mm

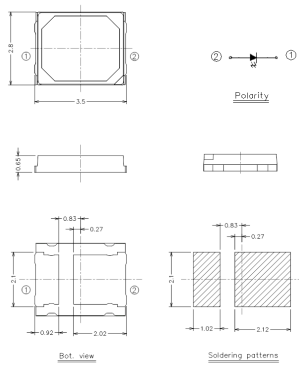


Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-2835SN1T	3.5x2.8x0.7	Blue	0.03	447.5~457.5	20-38(mW)	2.5-3	120

Backlighting LED ■ Local Dimming Product



UNIT : mm

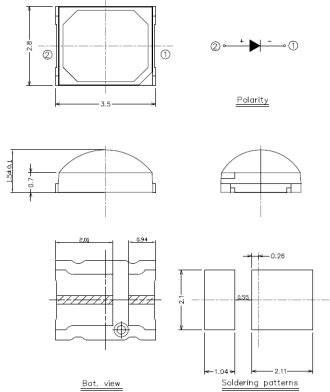

Product	Dimension (mm)	Color	Power(W)	CIE(x,y)	Iv(lm,mW)	VF(V)	Viewing Angle(°)
BL-2835LN1CTBC	3.5x2.8x1.4	● Blue	0.15	447.5~457.5	70-100(mW)	2.8-3.1	140



INFRARED LED, SENSORS, COUPLERS, DIGITAL ISOLATOR

206 Infrared LED and Silicon Detector

241 Infrared Receiver Module

248 Optic-Fiber Device (Photo Link)

249 Optical Switch

256 Optical Sensor


263 Photo Coupler

300 Digital Isolation


Infrared LED and Silicon Detector I Emitter I Lamp




UNIT : mm

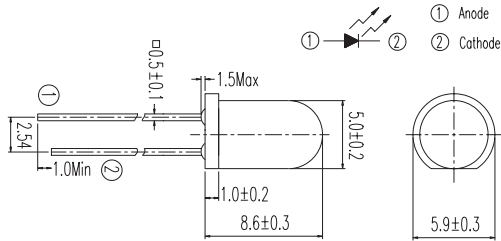

Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR333/H0	5	30	1.45	1.65	850	7.8	15
HIR333C/H0	5	30	1.45	1.65	850	7.8	15
IR333-A	5	20	1.2	1.5	940	7.8	20
IR333/H0	5	40	1.2	1.5	940	5.6	7.8
IR333/H0/L10	5	40	1.2	1.5	940	11	12
IR333C	5	20	1.2	1.5	940	7.8	15
IR333C/H0/L10	5	40	1.2	1.5	940	5.6	7.8
IR333C/H2	5	30	1.2	1.5	940	7.8	15
SIR333-A	5	20	1.3	1.6	875	7.8	20

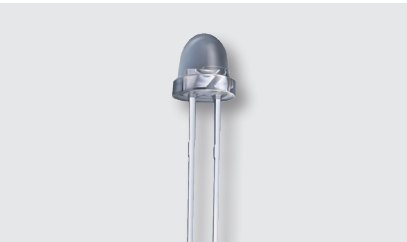


UNIT : mm

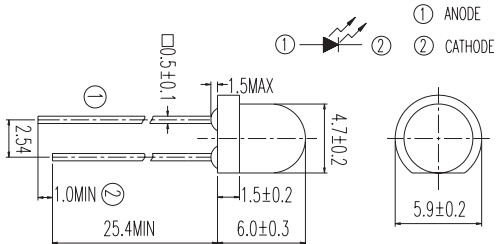

Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR323C	5	25	1.45	1.65	850	15	30
HIR323C/H0	5	30	1.45	1.65	850	7.8	11
IR323	5	30	1.2	1.5	940	4	6.4
IR323/H0-A	5	60	1.2	1.5	940	2	3.5
SIR323-5	5	35	1.3	1.6	875	4	7.8




UNIT : mm

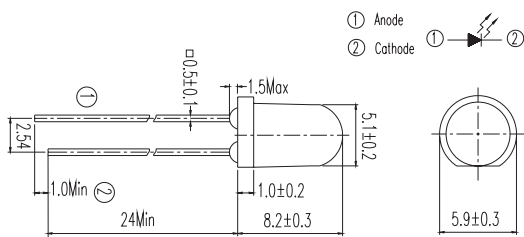


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR7373C	5	40	1.45	1.65	850	7.8	15
IR7373C	5	50	1.2	1.5	940	5.6	8


Infrared LED and Silicon Detector | Emitter | Lamp

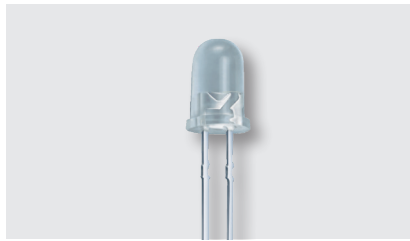


UNIT : mm

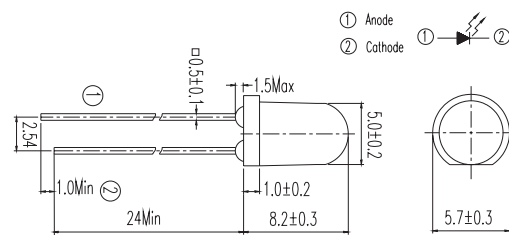

Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ_p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR7393C	5	50	1.45	1.65	850	7.8	15
IR7393C	5	60	1.2	1.5	940	4	6.5

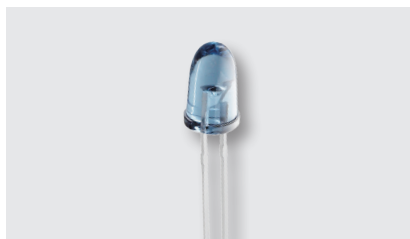


UNIT : mm

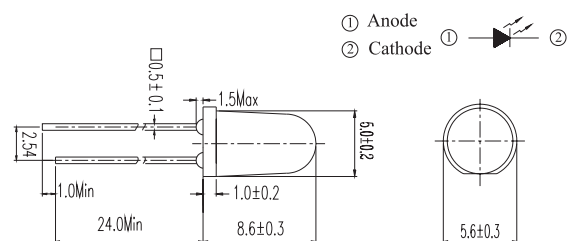

Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ_p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
IR383	5mm	18	1.2	1.6	940	15	34
HIR383C/L212	5mm	6	1.45	1.65	850	-	140
SIR383C	5mm	20	1.3	1.6	875	11	20




UNIT : mm

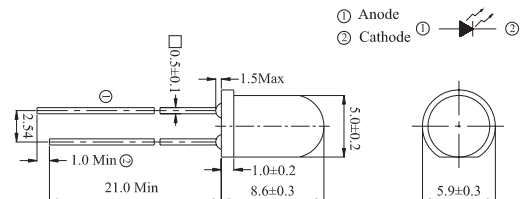

Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ_p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
IR8353-14C	5	35	1.2	1.3	940	7.8	11




UNIT : mm

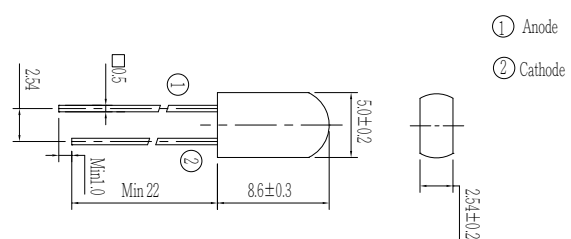


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ_p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
IR533C	5	25	1.2	1.5	940	4	7.8

Infrared LED and Silicon Detector I Emitter I Lamp

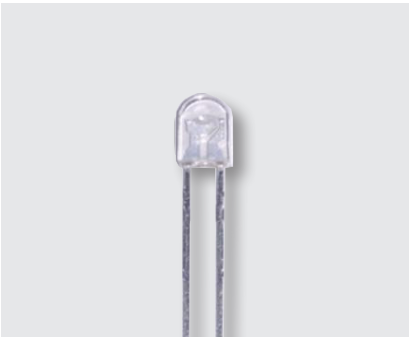


UNIT : mm

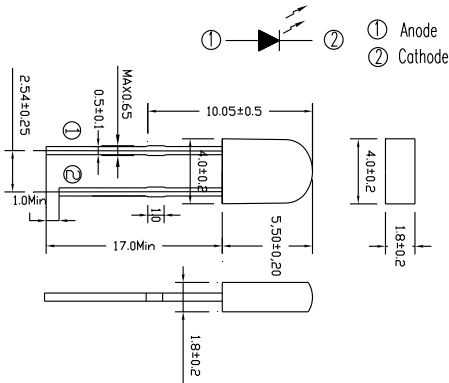


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
IR3494-30C/H80/L419	4	95(X)45(Y)	1.2	1.5	940	2.5	3.5




UNIT : mm

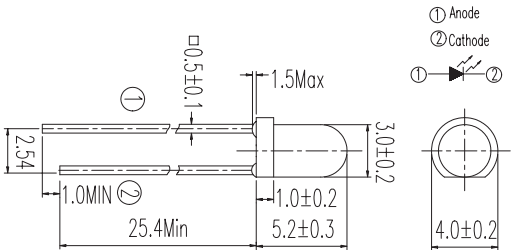

Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR204C	3	25	1.45	1.65	850	7.8	17.6
HIR204C/H0	3	40	1.45	1.65	850	4	8.9
IR204-A	3	35	1.2	1.5	940	4	5.6
IR204/H16/L10	3	50	1.2	1.5	940	2.8	4
IR204/H60	3	50	1.2	1.5	940	4	7
IR204C-A	3	35	1.2	1.5	940	4	5.6
IR204C/H16/L10	3	50	1.2	1.5	940	2.8	4
SIR204-A	3	30	1.3	1.6	875	4	6.4
SIR204C	3	30	1.3	1.6	875	4	6.4

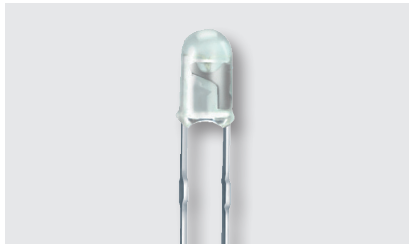

UNIT : mm

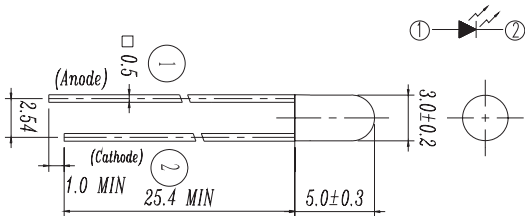


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
SIR234	3	30	1.46	1.65	850	7.8	15
HIR234C	3	30	1.3	1.6	875	5.6	9.3

Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

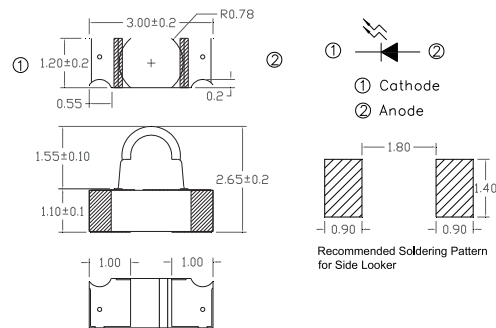


Product	Dimension (mm)	View Angle(°)	V _{F_Type} (V)	V _{F_Max} (V)	λ _p (nm)	I _{e_Min} (mW/sr)	I _{e_Type} (mW/sr)
IR26-61C/L746/R/TR8	3.0x1.2x2.65	20	1.25	1.5	940	4	8




UNIT : mm

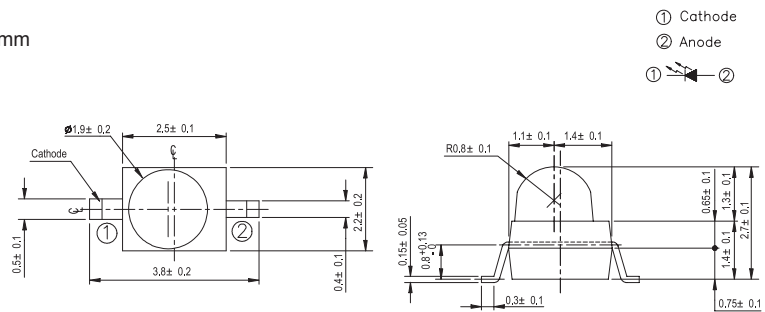

Product	Dimension (mm)	View Angle(°)	V _{F_Type} (V)	V _{F_Max} (V)	λ _p (nm)	I _{e_Min} (mW/sr)	I _{e_Type} (mW/sr)
IR91-21C	2.5x2.2x2.7	25	1.2	1.5	940	3	5
IR91-21C/TR10	2.5x2x2.7	25	1.2	1.5	940	3	5
IR91-21C/TR7	2.5x2x2.7	25	1.2	1.5	940	3	5
SIR91-21C/TR10	2.5x2x2.7	20	1.3	1.6	875	3	5
SIR91-21C/TR7	2.5x2x2.7	20	1.3	1.6	875	3	5

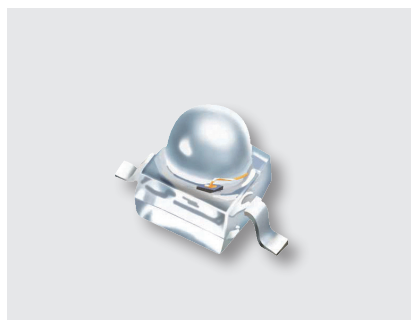

UNIT : mm

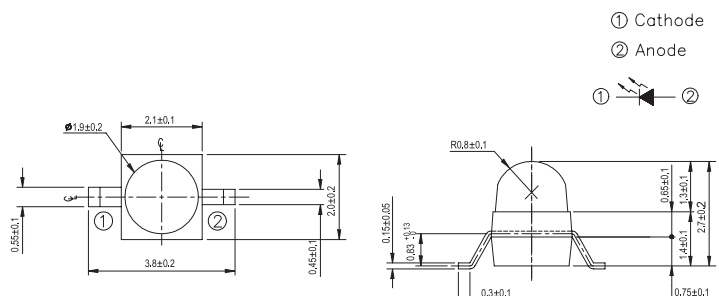


Product	Dimension (mm)	View Angle(°)	V _{F_Type} (V)	V _{F_Max} (V)	λ _p (nm)	I _{e_Min} (mW/sr)	I _{e_Type} (mW/sr)
IR95-21C/TR7	2.1x2.0x2.7	25	1.2	1.5	940	3	5
IR95-21C/L491/TR10	2.1x2.0x2.7	20	1.2	1.5	940	20	30
IR95-21C/TR9	2.1x2.0x2.7	25	1.2	1.5	940	3	5
SIR95-21C/TR10	2.1x2.0x2.7	25	1.3	1.6	875	2	4


Infrared LED and Silicon Detector I Emitter I SMD




UNIT : mm

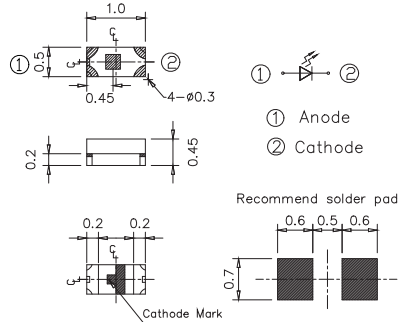

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{F_Min} (mW/sr)	I _{F_Typ} (mW/sr)
HIR16-213C/L423/TR8	1.0x0.5x0.45	145	1.45	1.65	850	0.5	1.5
IR16-213C/L510/TR8	1.0x0.5x0.45	120	1.5	1.9	940	0.5	2.35

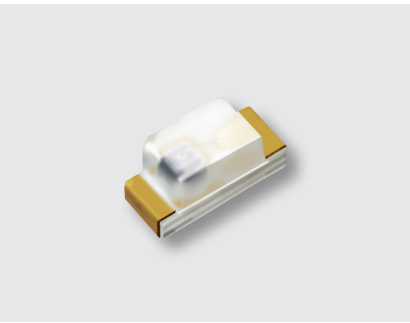


UNIT : mm

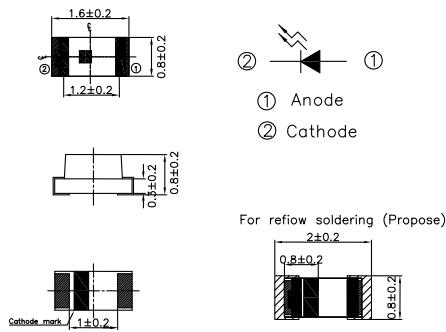

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{F_Min} (mW/sr)	I _{F_Typ} (mW/sr)
HIR19-21C/L11/TR8	1.6x0.8x0.8	145	1.45	1.65	850	0.2	0.8
HIR19-21C/L289/TR8	1.6x0.8x0.8	145	1.45	1.67	850	1	1.85
IR19-21C/TR8	1.6x0.8x0.8	150	1.2	1.5	940	0.2	0.7
SIR19-21C/TR8	1.6x0.8x0.8	145	1.3	1.6	875	0.2	0.5



UNIT : mm

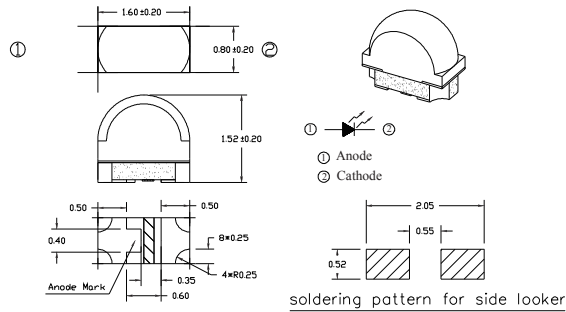


Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{F_Min} (mW/sr)	I _{F_Typ} (mW/sr)
HIR83-01B/TR8	1.6x0.8x1.52	100(X) 40(Y)	1.4	1.7	850	2	5
IR83-01C/2H	1.6x0.8x1.52	115(X) 55(Y)	1.2	1.5	940	2	2.6


Infrared LED and Silicon Detector ■ Emitter ■ SMD




UNIT : mm

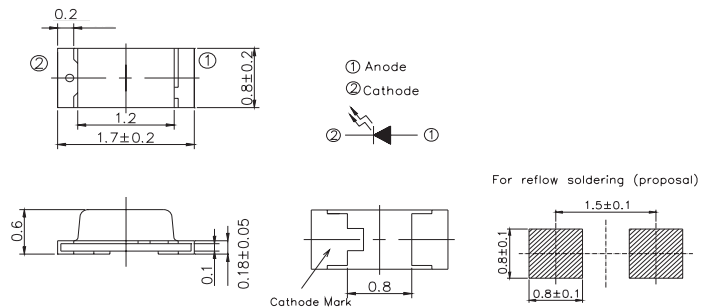


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
IR19-315C/TR8	1.7x0.8x0.6	140	1.2	1.5	940	0.2	0.6
HIR19-315C/L825/TR8	1.7x0.8x0.6	140	1.4	1.8	850	2.3	2.6
SIR19-315/TR8	1.7x0.8x0.6	140	1.35	1.7	870	1	1.3

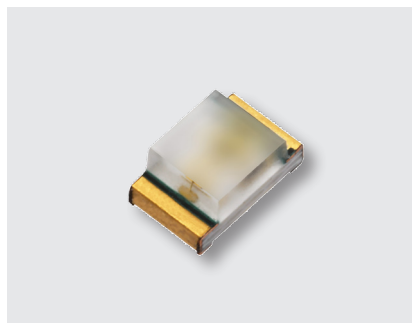


UNIT : mm

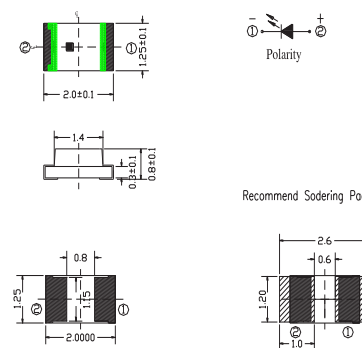

Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR17-215C/L289/TR8	2.0x1.25x0.8	140	1.55@100mA	1.8@100mA	850	10@100mA	12@100mA

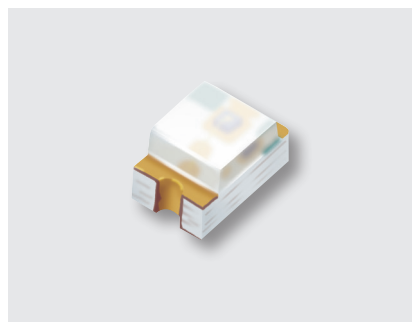


UNIT : mm

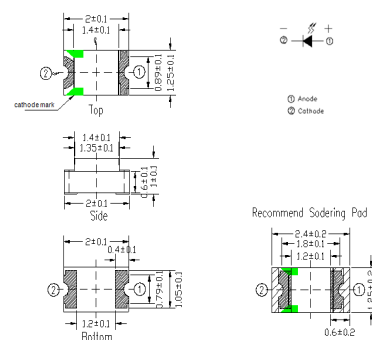


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
IR17-21C/TR8	2.0x1.25x1	120	1.2	1.5	940	0.2	0.8
HIR17-21C/L289/TR8	2.0x1.25x1	140	1.4	1.7	850	1.6	2

Infrared LED and Silicon Detector I Emitter I SMD

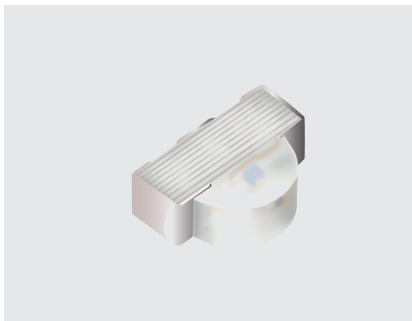


UNIT : mm

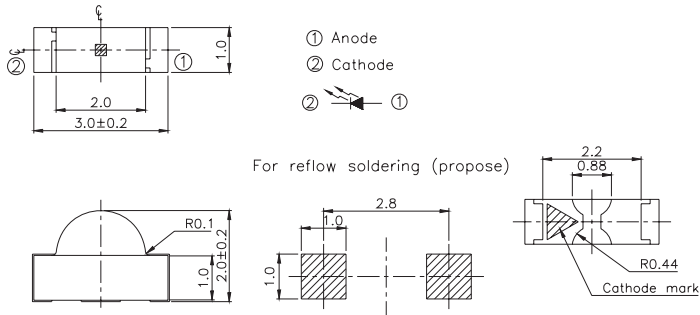

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{F_Min} (mW/sr)	I _{e_Typ} (mW/sr)
HIR12-21C/TR8	3.0x1.0x2.0	145	1.45	1.65	850	0.7	1.3
IR12-21C/TR8	3.0x1.0x2.0	160	1.2	1.5	940	0.5	0.8
SIR12-21C/TR8	3.0x1.0x2.0	160	1.3	1.6	875	0.5	0.9




UNIT : mm

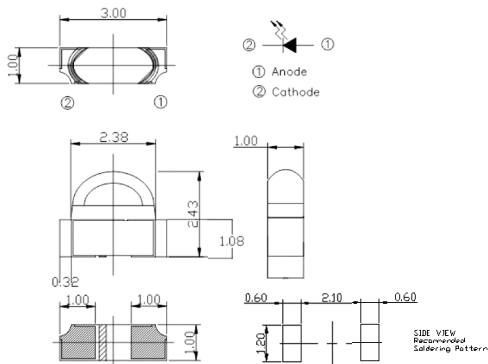

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{F_Min} (mW/sr)	I _{e_Typ} (mW/sr)
IR26-91C/L510/2D	3.0x1.0x2.43	130(X)20(Y)	1.3	1.6	940	-	8
IR26-91C/2D	3.0x1.0x2.43	130(X)20(Y)	1.2	1.6	940	5	8



UNIT : mm

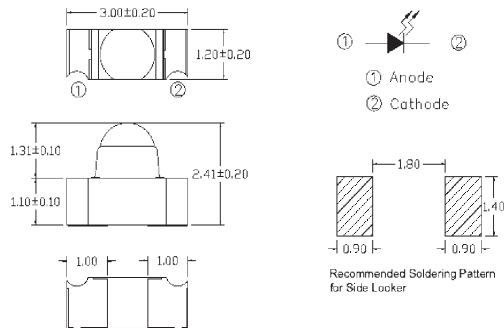


Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{F_Min} (mW/sr)	I _{e_Typ} (mW/sr)
IR26-71C/L447/S63/TR8	3.0x1.2x2.4	50	1.3	1.6	940	5	8.5


Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

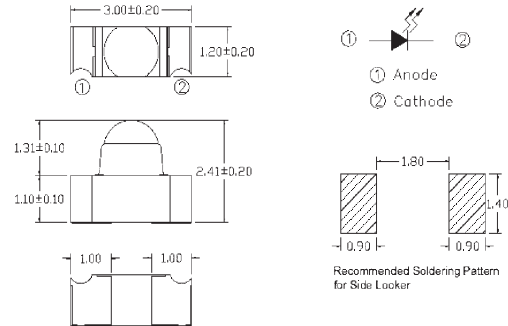

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ_p (nm)	I _{e_Min} (mW/sr)	I _{e_Typ} (mW/sr)
IR26-61C/L510/R/2G	3.0x1.2x2.65	20	1.2	1.5	940	10	24
IR26-61C/L745/TR8	3.0x1.2x2.65	30	1.2	1.5	940	13	20
IR26-61C/L746/R/TR8	3.0x1.2x2.65	20	1.25	1.5	940	4	8

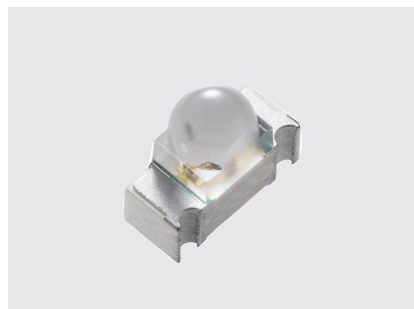


UNIT : mm

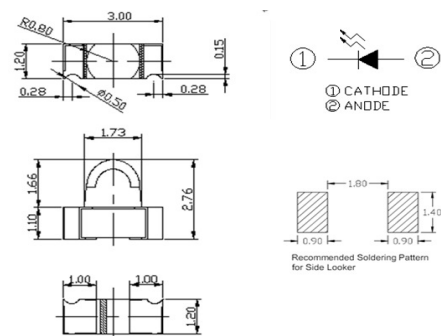

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ_p (nm)	I _{e_Min} (mW/sr)	I _{e_Typ} (mW/sr)
IR29-01C/L510/R/TR8	3.0x1.2x2.76	15	1.3	1.6	940	20	25




UNIT : mm




Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ_p (nm)	I _{e_Min} (mW/sr)	I _{e_Typ} (mW/sr)
HIR11-21C/L11/TR8	3.0x1.5x1.5	75	1.45	1.65	850	1	2
IR11-21C/L491/TR8	3.0x1.5x1.5	80	1.3	1.7	940	1	2.8
IR11-21C/TR8	3.0x1.5x1.5	100	1.2	1.5	940	0.5	1.6



Infrared LED and Silicon Detector I Emitter I SMD

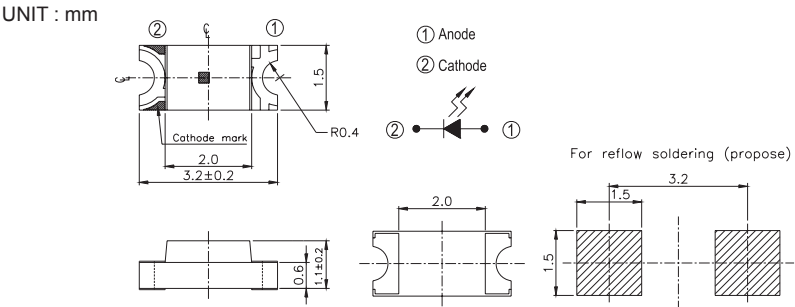

Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
IR15-21C/TR8	3.2x1.5x1.1	160	1.2	1.5	940	0.2	0.8
HIR15-21C/TR8	3.2x1.5x1.1	150	1.45	1.65	850	0.5	1.5

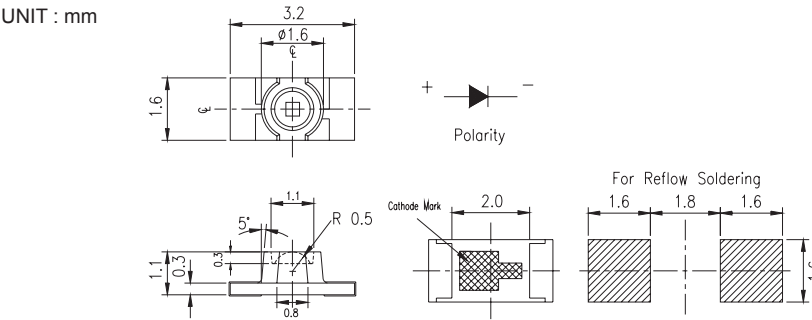


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR25-21C/L289/2T	3.2x1.6x1.0	60	1.4	1.7	850	4	5
HIR25-21C/L423/TR8	3.2x1.6x1.1	70	1.45	1.65	850	3	5.5
IR25-21C/TR8	3.2x1.6x1.1	160	1.2	1.5	940	0.5	1.5

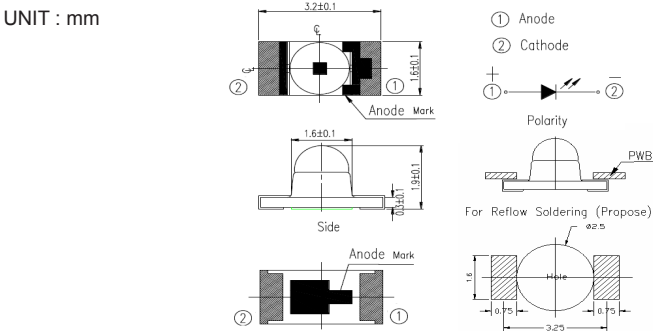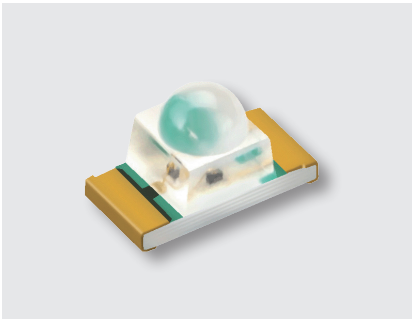


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR26-21C/L289/TR8	3.2x1.6x1.9	25	1.4	1.7	850	10	17
HIR26-21C/L423/TR8	3.2x1.6x1.9	20	1.45	1.7	850	14	16
IR26-21C/L110/TR8	3.2x1.6x1.9	20	1.2	1.5	940	1	3
IR26-21C/L447/CT	3.2x1.6x1.9	25	1.3	1.5	940	11	18


Infrared LED and Silicon Detector | Emitter | SMD

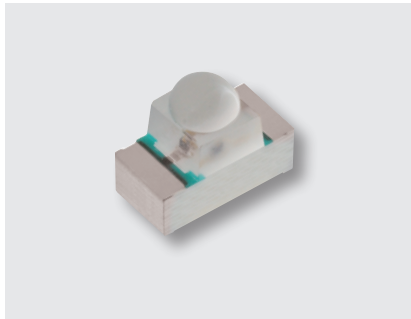


UNIT : mm

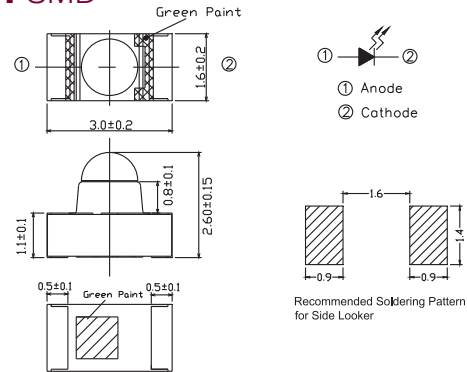

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{e_Typ} (mW/sr) IF=20mA	I _{e_Typ} (mW/sr) IF=100mA
IR26-51C/L110/TR8	3.2x1.6x2.6	20	1.2	1.5	940	1	3.5
IR26-51C/L510/TR8	3.2x1.6x2.6	20	1.3	1.7	940	9	12
HIR26-51C/L423/TR8	3.2x1.6x2.6	25	1.4	1.6	850	9	18

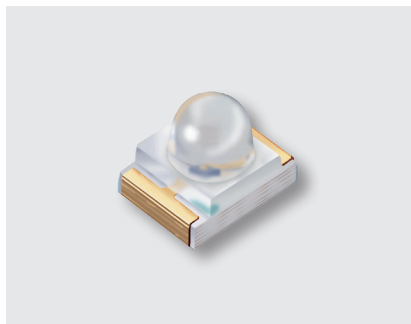


UNIT : mm

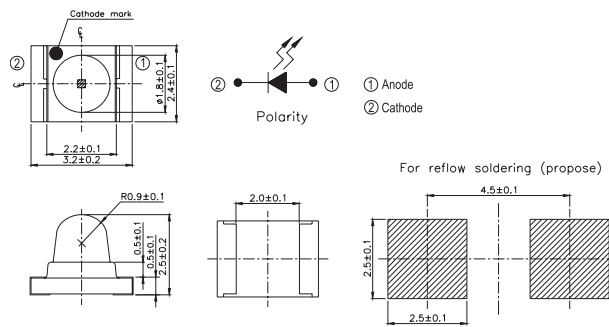

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{e_Min} (mW/sr)	I _{e_Typ} (mW/sr)
IR42-21C/TR8	3.2x2.4x2.5	30	1.2	1.5	940	1	3
HIR42-21C/L289/TR8	3.2x2.4x2.5	20	1.4	1.6	850	11	30




UNIT : mm

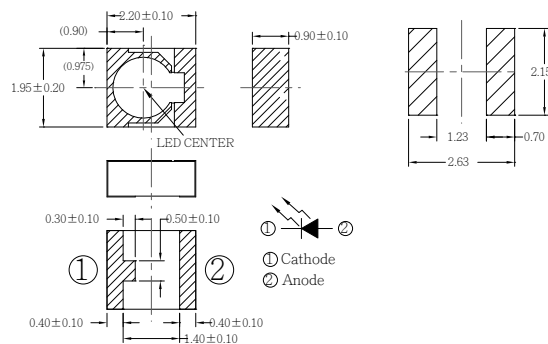

Product	Dimension (mm)	View Angle(°)	V _{F_Typ} (V)	V _{F_Max} (V)	λ _p (nm)	I _{e_Min} (mW/sr)	I _{e_Typ} (mW/sr)
IR91-01C/L491/2R	2.2x1.95x0.90	40	1.4	1.7	940	25@70mA	50@70mA

Figure 1: Dimensions of the LED package. The figure includes four views: a top view, a side view, a front view, and a soldering pattern for the top layer. The top view shows a square package with dimensions 3.10 ± 0.20 mm (width) and 2.25 ± 0.10 mm (height). It features a central LED center with a diameter of 1.20 mm and a square pad with a side length of 1.13 mm. The side view shows a height of 1.60 ± 0.20 mm. The front view shows a width of 1.10 ± 0.15 mm and a height of 0.85 ± 0.15 mm. The soldering pattern for the top layer shows a square pad with a side length of 1.20 mm and a central hole with a diameter of 0.60 mm. The dimensions of the pad and hole are 0.85 ± 0.15 mm and 0.30 ± 0.15 mm, respectively. A legend indicates that the shaded area represents the solder resist.

A 3D rendering of a square metal connector, likely made of stainless steel, featuring a central circular hole and a C-shaped slot on one side. The object is shown from a perspective view against a light gray background.

Legend:
 ① Anode
 ② Cathode

Polarity: Diagram showing current flow from the anode (+) to the cathode (-).

Dimensions (mm):


- Top View:** Overall width 3.34, hole diameter 0.7, pad diameter 1.0, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5.
- Side View:** Pad height 0.5, hole diameter 0.7, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5.
- Front View:** Pad width 1.0, hole diameter 0.7, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5.
- Cross-section:** Pad height 0.5, hole diameter 0.7, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5, distance from hole to pad edge 0.5.

216


Infrared LED and Silicon Detector I Emitter I SMD




UNIT : mm



Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
HIR67-31JC/L638/TR8	3.5x2.7x3.0	35	2.85	3.3	850	13	20
IR67-41C/L491/TR8	3.5x2.7x1.9	120	1.3	1.6	940	1.5	3.5

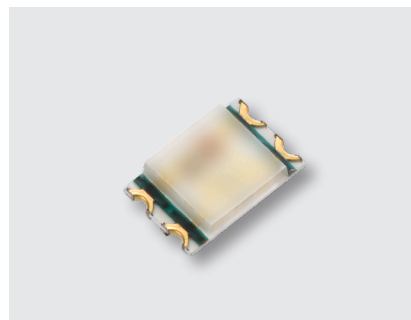


UNIT : mm

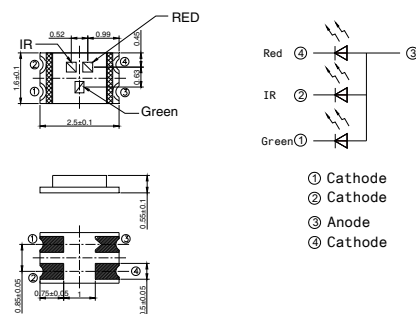


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
B-IRRG1816CW3-L885-TR8	1.8x1.6x0.6	110(IR)110(R) 110(G)	-	1.8(IR)2.5(R) 2.8(G)	940(IR)660(R) 530(G)	7.5(IR)8(R)8(G)	10(IR)13(R)14(G)
B-IRRG2020CW4-L885-3T	2.0x2.0x0.6	110(IR)105(R) 105(G)	1.4(IR)2(R) 2.5(G)	1.7(IR)2.5(R) 3(G)	940(IR)660(R) 530(G)	3(IR)4.5(R) 2000mcd(G)	-
IRRG25-16C/L491/TR8	2.5x1.6x0.55	120	3.0(G)1.9(R) 1.3(IR)	3.5(G)2.5(R) 1.8(IR)	525(G)660(R) 940(IR)	1200mcd(G) 150mcd(R)1.5(IR)	-


Infrared LED and Silicon Detector ■ Emitter ■ SMD

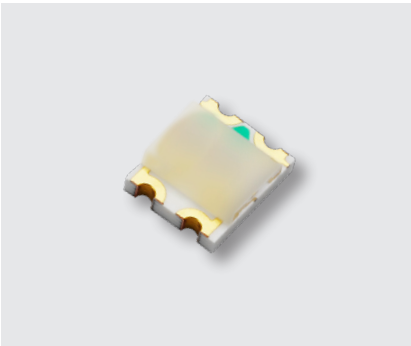


UNIT : mm



Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
BR15-22C/L586/R/TR8	3.2x2.7x1.0	140	1.8(R)1.3(IR)	2.6(R)1.8(IR)	660(R)905(IR)	0.5(R)0.2(IR)	1.5(R)0.5(IR)
IRR15-22C/L491/TR8	3.2x2.7x1.0	120	1.9(R)1.3(IR)	2.5(R)1.7(IR)	660(R)940(IR)	1.0(R)1.0(IR)	2.3(R)2.1(IR)

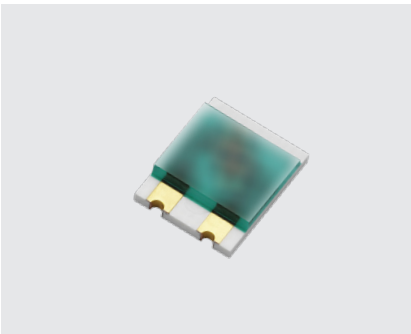

UNIT : mm

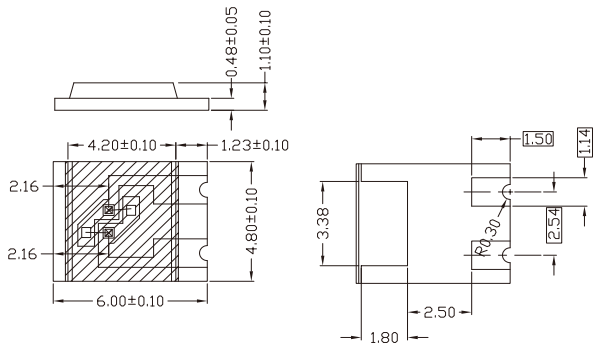


Product	Dimension (mm)	View Angle(°)	V _F _Typ (V)	V _F _Max (V)	λ _p (nm)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)
IRR60-48C/L661/TR8	6.0x4.8x1.1	140(R)130(IR)	2.1(R)1.4(IR)	2.5(R)1.6(IR)	660(R)910(IR)	1.0(R)1.0(IR)	2.3(R)1.5(IR)
IRR60-48C/TR8	6.0x4.8x1.1	140(R)130(IR)	2.1(R)1.4(IR)	2.5(R)1.6(IR)	660(R)905(IR)	1(R)0.5(IR)	2.3(R)1(IR)

Infrared LED and Silicon Detector | Emitter | Side Look




UNIT : mm

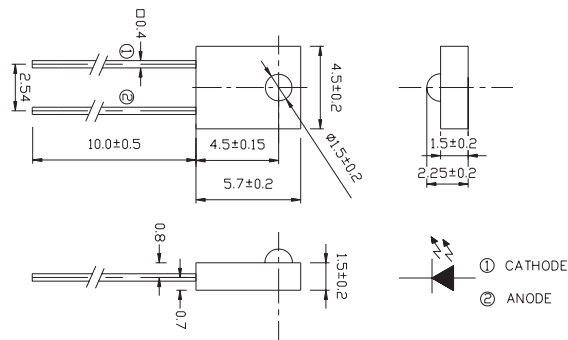

Product	Dimension (mm)	View Angle(°)	V _{F_Type} (V)	V _{F_Max} (V)	λ _p (nm)
IR908-7C-F	4.5x2.25x5.7	40	1.2	1.5	940




UNIT : mm

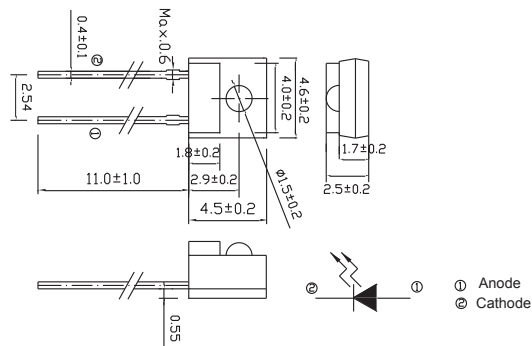

Product	Dimension (mm)	View Angle(°)	V _{F_Type} (V)	V _{F_Max} (V)	λ _p (nm)
IR928-6C-F	4.6x2.5x4.5	20	1.2	1.5	940




UNIT : mm

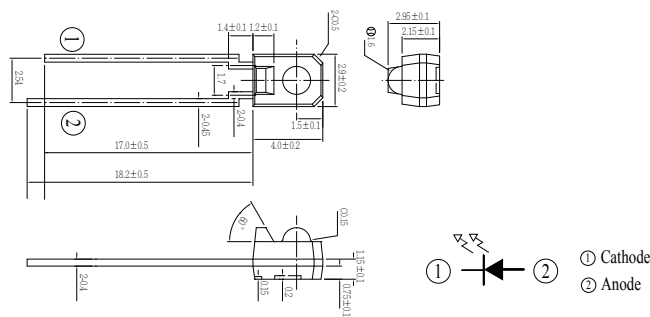


Product	Dimension (mm)	View Angle(°)	V _{F_Type} (V)	V _{F_Max} (V)	λ _p (nm)
IR968-8C	2.9x4.0x2.9	25	1.2	1.5	940

Infrared LED and Silicon Detector ■ Emitter ■ High power


UNIT : mm



Product	Dimension (mm)	Viewing Angle(°)	VF_Type (V) (If=1A)	λp(nm)	IE_Type (mW/sr) (If=1A)	Po_Type (mW) (If=1A)
IR-S06-P120/L741-P03/TR	2.8x2.0x0.6	120	-	940	-	-

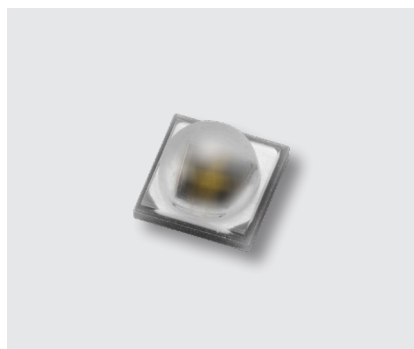


UNIT : mm




Product	Dimension (mm)	Viewing Angle(°)	VF_Typ (V) (If=1A)	λp(nm)	IE_Typ (mW/sr) (If=1A)	Po_Typ (mW) (If=1A)
HIR-C19D-1N150/L649-P03/TR	3.5x3.5x1.605	150	3.1	850	270	1100
HIR-C19D-1N90/L649-P03/TR	3.5x3.5x2.36	90	3.5	850	560	1300
HIR-C19D-1N40-L649-P03-TR-AM	3.5x3.5x3.44	40	3.2	850	1100	1240


Infrared LED and Silicon Detector ■ Emitter ■ High power

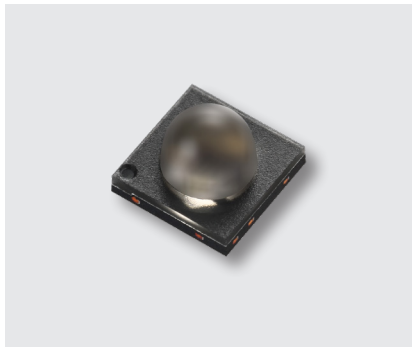


UNIT : mm

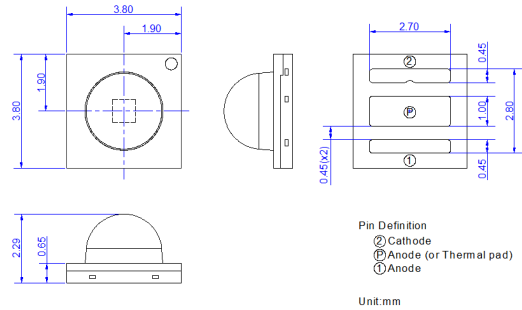

Product	Dimension (mm)	Viewing Angle(°)	VF_Typ (V) (If=1A)	λ_p (nm)	IE_Typ (mW/sr) (If=1A)	Po_Typ (mW) (If=1A)
HC-HIR383823C1/L933-050/06T	3.8x3.8x2.66	50	2	850	950	655
HC-HIR383823C1/L933-080/08T	3.8x3.8x2.29	80	1.8	850	485	750
HC-HIR383823C1/L933-090/08T	3.8x3.8x2.25	90	1.77	850	415	725
HC-HIR383822C1/L933-120/08T	3.8x3.8x2.1	120	1.95	850	240	700
HC-HIR383815C1/L933-150/08T	3.8x3.8x1.49	150	1.95	850	170	700
HC-HIR383815C2/L949-150/08T	3.8x3.8x1.49	150	3.25	850	335	1290
HC-HIR383815C1/L947-150/08T	3.8x3.8x1.49	150	1.7	850	195	785

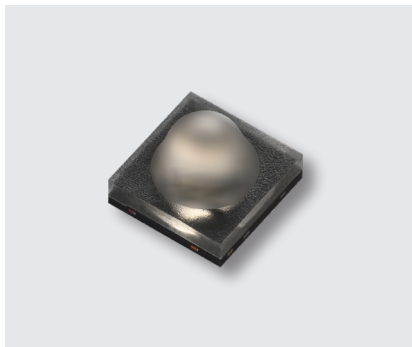


UNIT : mm

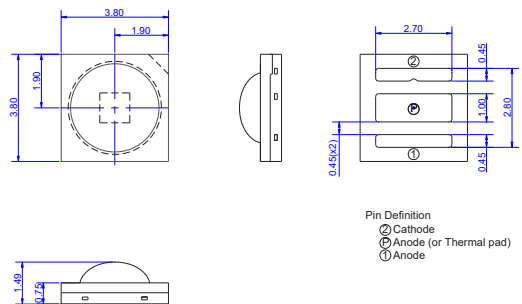


Product	Dimension (mm)	Viewing Angle(°)	VF_Typ (V) (If=1A)	λ_p (nm)	IE_Typ (mW/sr) (If=1A)	Po_Typ (mW) (If=1A)
HC-IR383827C2/L941-050/06T	3.8x3.8x2.66	50	3.35	940	925	1140
HC-IR383827C2/L741-050/06T	3.8x3.8x2.95	50	2.9	940	1220	1265
HC-IR383828C2/L741-060/06T	3.8x3.8x2.79	60	2.9	940	900	1285
HC-IR383823C2/L741-090/08T	3.8x3.8x2.25	90	3.45	940	730	1220
HC-IR383822C2/L741-120/08T	3.8x3.8x2.1	120	2.9	940	420	1330
HC-IR383823C2/L741-150/08T	3.8x3.8x1.49	150	3.06	940	340	1275
HC-IR383822C1/L743-120/08T	3.8x3.8x2.2	120	1.45	940	230	670
HC-IR383815C1/L743-150/08T	3.8x3.8x1.49	150	1.5	940	160	610

Infrared LED and Silicon Detector ■ Emitter ■ High power

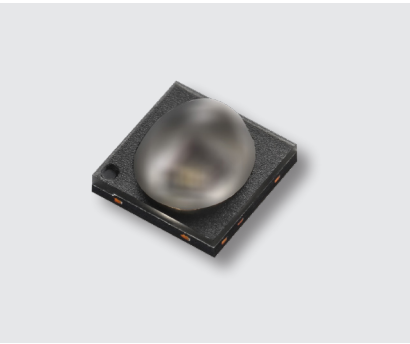


UNIT : mm

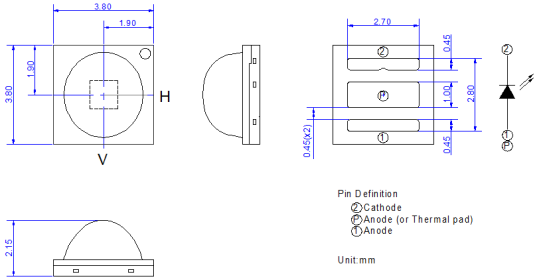

Product	Dimension (mm)	Viewing Angle(°)	VF_Typ (V) (If=1A)	λp(nm)	IE_Typ (mW/sr) (If=1A)	Po_Typ (mW) (If=1A)
HC-HIR383822C1/L933-8012/08T	3.8x3.8x2.15	120/80	1.8	850	310	745




UNIT : mm



Product	Dimension (mm)	Viewing Angle(°)	VF_Typ (V) (If=1A)	λp(nm)	IE_Typ (mW/sr) (If=1A)	Po_Typ (mW) (If=1A)
HC-IR282017C2/L873-060/08T	2.8x2.0x1.65	60	3.8	940	730	1100



UNIT : mm




Product	Dimension (mm)	Viewing Angle(°)	VF_Typ (V) (If=800mA)	λp(nm)	Ie_Typ (mW/sr) (If=800mA)	Po_Typ (mW) (If=800mA)
HC-HIR282017C2/L913-060/08T	2.8x2.0x1.65	60	3.3	850	565	650

Infrared LED and Silicon Detector ■ Photo Diode ■ Side Look




UNIT : mm

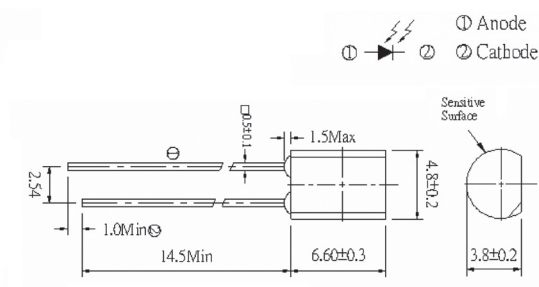

Product	Dimension (mm)	λ_p (nm)	I_L _Typ (μ A)	BVR_Min.(V)	ID_Max (nA)
PD438B	4.8x3.8x6.6	940	18	32	30
PD438B/S46	4.8x3.8x6.6	940	18	32	30




UNIT : mm

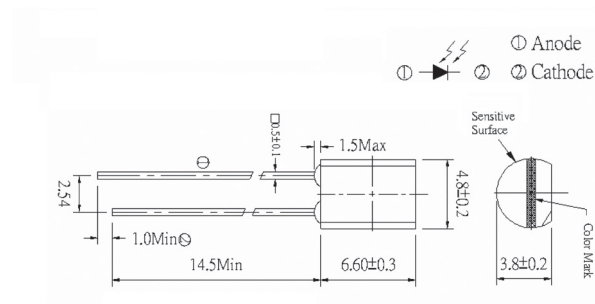

Product	Dimension (mm)	λ_p (nm)	I_L _Typ (μ A)	BVR_Min.(V)	ID_Max (nA)
PD438C	4.8x3.8x6.6	940	18	32	30
PD438C/S46	4.8x3.8x6.6	940	18	32	30



UNIT : mm

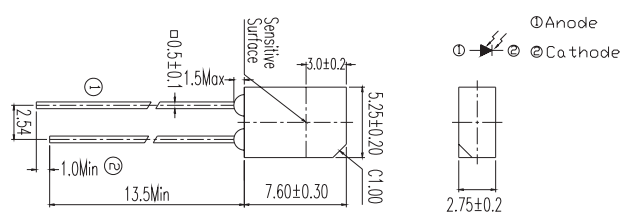


Product	Dimension (mm)	λ_p (nm)	I_L _Typ (μ A)	BVR_Min.(V)	ID_Max (nA)
PD638B	5.2x2.7x7.6	940	18	32	30

① Anode
② Cathode

Dimensions (mm):

- Lead height: 2.54
- Lead length: 1.0 Min
- Body length: 25.4 Min
- Lead width: 0.5 ± 0.1
- Body width: 1.0 ± 0.2
- Body thickness: 1.5 Max
- Body length: 5.2 ± 0.3
- Body height: 3.0 ± 0.2
- Package diameter: 4.0 ± 0.2

Product	Dimension (mm)	λ_p (nm)	I _{L_Type} (μA)	BVR_Min.(V)	ID_Max (nA)
PD204-6C	3	940	3.5	32	10
PD204-6C/L3	3	940	10	32	10

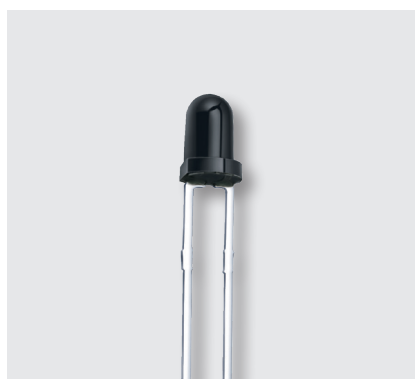

① Anode
② Cathode

0.5 ± 0.1

1.0 ± 0.2

3.0 ± 0.2

25.4 Min

1.0 Min


1.5 Max

5.2 ± 0.3


4.0 ± 0.2

Product	Dimension (mm)	λ_p (nm)	I _{L_Typ} (μA)	BVR_Min.(V)	ID_Max (nA)
PD204-6B	3	940	3	32	10
PD204-6B/L3	3	940	6	32	10


Infrared LED and Silicon Detector | Photo Diode | Lamp

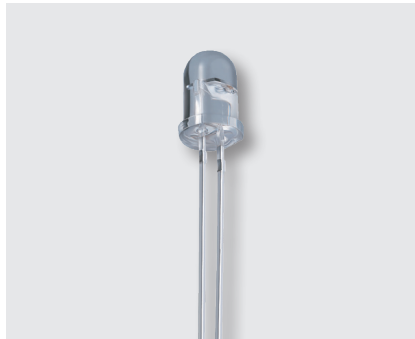


UNIT : mm

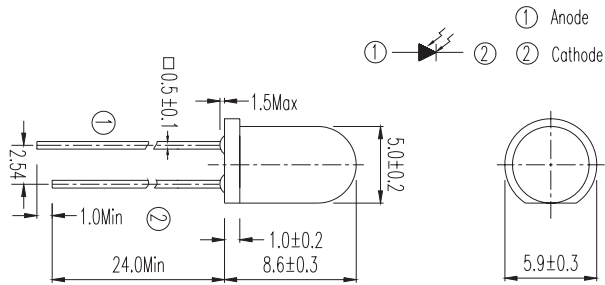

Product	Dimension (mm)	λ_p (nm)	I_L _Typ (μ A)	BVR_Min.(V)	ID_Max (nA)
PD333-3C/L793	5	940	33	30	10
PD333-3C/H0/L2	5	940	40	32	30
PD333-3C/H0/L811	5	940	60	35	10

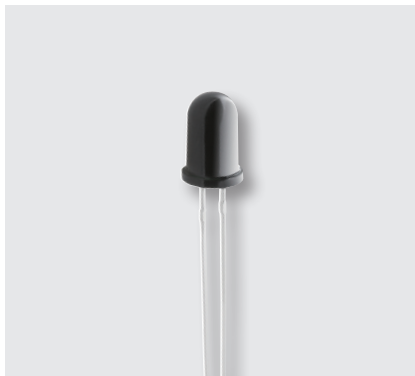


UNIT : mm

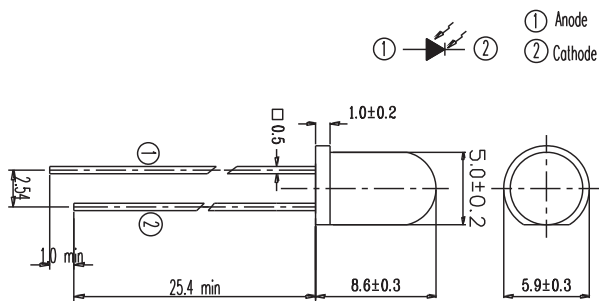


Product	Dimension (mm)	λ_p (nm)	I_L _Typ (μ A)	BVR_Min.(V)	ID_Max (nA)
PD333-3B/L1	5	940	min. 15	32	30
PD333-3B/L2	5	940	35	32	30
PD333-3B/L3	5	940	min. 10	32	10
PD333-3B/L4	5	940	12	32	10
PD333-3B/H0/L2	5	940	35	32	30


Infrared LED and Silicon Detector | Photo Diode | SMD

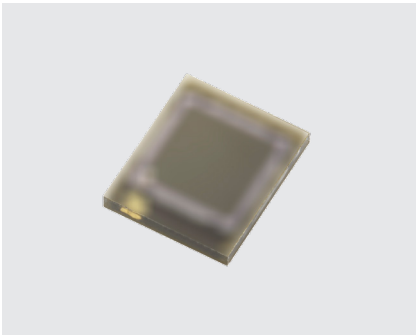


UNIT : mm



Product	Dimension (mm)	λ_p (nm)	I _{L_min} (μ A)	I _{L_typ} (μ A)	B _{VR} (V)
PD44-37C-L753-TR8	4.4x3.7x0.55	880(400~1100)	(IR):29, (R):34, (G):38	(IR):42 (R):39 (G):33	32

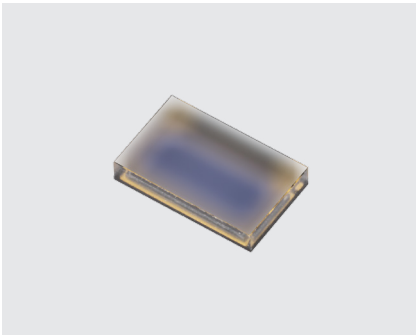


UNIT : mm



Product	Dimension (mm)	λ_p (nm)	I _{L_min} (μ A)	I _{L_typ} (μ A)	B _{VR} (V)
B-PD322006C1/L917/135/3T	3.2x2.0x0.6	820(400~1100)	(IR):8, (R):10, (G):11	(IR):14 (R):16 (G):13	65



UNIT : mm




Product	Dimension (mm)	λ_p (nm)	I _{L_min} (μ A)	I _{L_typ} (μ A)	B _{VR} (V)
PD95-21B/TR10	2.1x2x2.7	940	1	4	32


Infrared LED and Silicon Detector | Photo Diode | SMD




UNIT : mm



Product	Dimension (mm)	λ_p (nm)	I _{L_min} (uA)	I _{L_typ} (uA)	B _{VR} (V)
PD91-21B/TR9	2.5x2.2x2.7	940	-	5	32

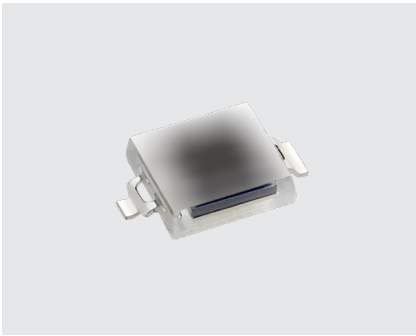


UNIT : mm

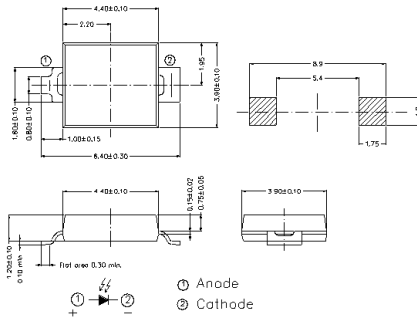

Product	Dimension (mm)	λ_p (nm)	I _{L_min} (uA)	I _{L_typ} (uA)	B _{VR} (V)
PD70-01B/TR7	4.4x3.9x1.2	940	17	25	32



UNIT : mm

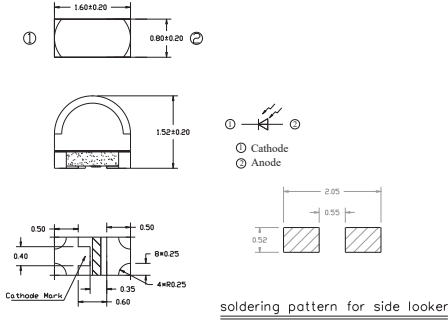


Product	Dimension (mm)	λ_p (nm)	I _{L_min} (uA)	I _{L_typ} (uA)	B _{VR} (V)
PD83-01B/L458/2H	1.6x0.8x1.52	940	1.14	2.4	32

Infrared LED and Silicon Detector

Infrared LED and Silicon Detector | Photo Diode | SMD




UNIT : mm

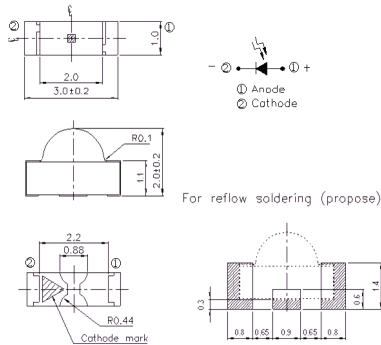


Product	Dimension (mm)	λ_p (nm)	I_{L_min} (μ A)	I_{L_typ} (μ A)	B_{VR} (V)
PD12-21B/TR8	3.0x1.0x2.0	940	0.7	1.5	32




UNIT : mm

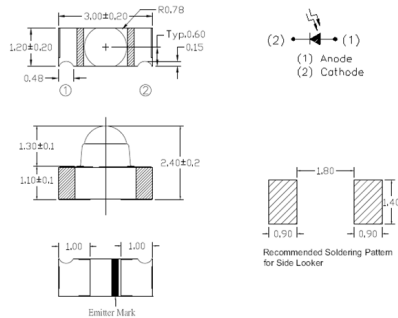

Product	Dimension (mm)	λ_p (nm)	I_{L_min} (μ A)	I_{L_typ} (μ A)	B_{VR} (V)
PD26-71B/S63/TR8	3.0x1.2x2.4	940	0.7	2	32

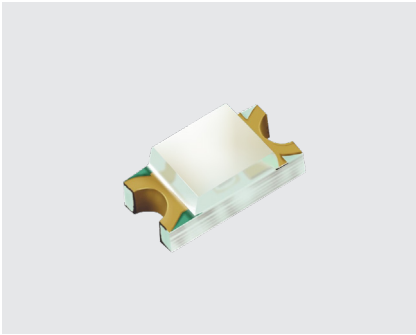


UNIT : mm

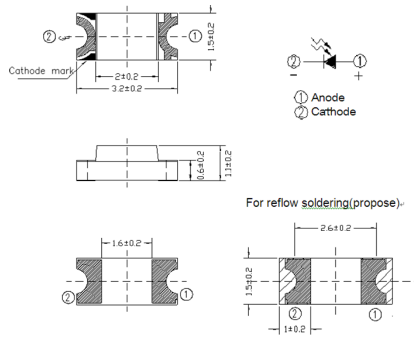


Product	Dimension (mm)	λ_p (nm)	I_{L_min} (μ A)	I_{L_typ} (μ A)	B_{VR} (V)
PD15-21C/TR8	3.2x1.5x1.1	940	0.2	0.9	32


Infrared LED and Silicon Detector | Photo Diode | SMD

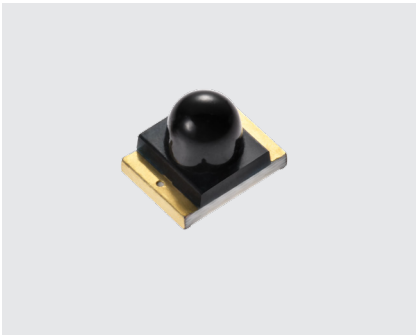


UNIT : mm



Product	Dimension (mm)	λ_p (nm)	I _{L_min} (uA)	I _{L_typ} (uA)	B _{VR} (V)
PD42-21C/TR8	3.2x2.4x2.5	940	2	5	32

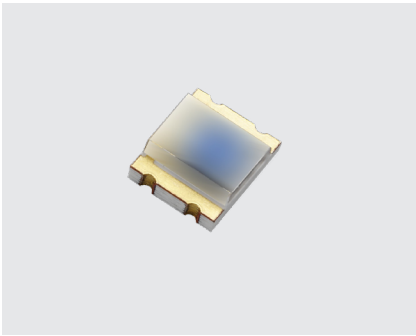

UNIT : mm




Product	Dimension (mm)	λ_p (nm)	I _{L_min} (uA)	I _{L_typ} (uA)	B _{VR} (V)
PD15-22C/TR8	3.2x2.7x1.1	940	4.2	10	32

Infrared LED and Silicon Detector

Infrared LED and Silicon Detector | Photo Diode | SMD




UNIT : mm



Product	Dimension (mm)	λ_p (nm)	$I_{L_min_}$ (uA)	$I_{L_typ_}$ (uA)	B_{VR} (V)
PD28-01B/L609/2C	4.2x2.8x3.9	940	20	25	32



UNIT : mm




Product	Dimension (mm)	λ_p (nm)	$I_{L_min_}$ (uA)	$I_{L_typ_}$ (uA)	B_{VR} (V)
PD67-21B/TR8	3.5x2.7x1.9	940	1	1.65	32


Infrared LED and Silicon Detector ■ Photo Transistor ■ Side Look




UNIT : mm

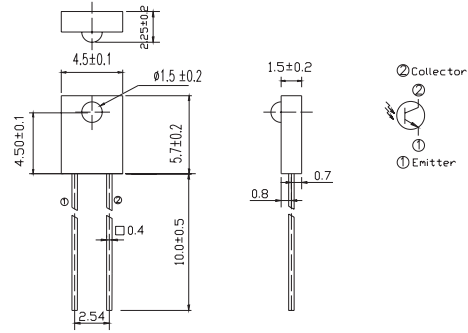

Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT908-7C-F	4.5x2.25x5.7	940	15/15	0.4	min. 0.8
PT908-7B-F	4.5x2.25x5.7	940	15/15	0.4	min. 0.8

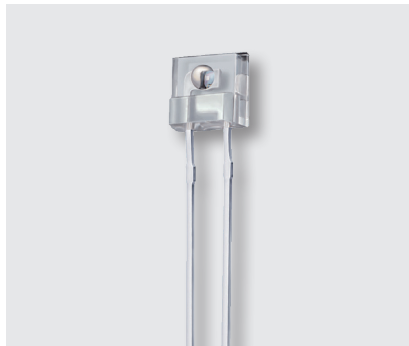


UNIT : mm

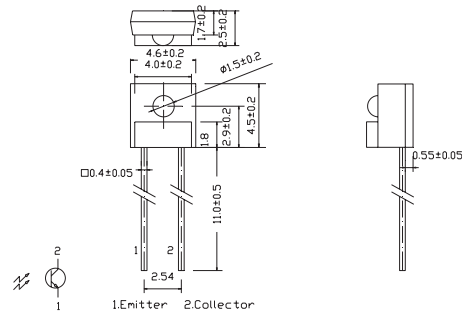

Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT928-6B-F	4.6x2.5x4.5	940	15/15	0.4	2
PT928-6C-F	4.6x2.5x4.5	940	15/15	0.4	min. 0.7




UNIT : mm

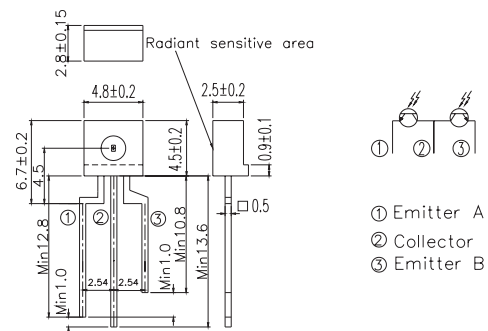


Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT2559B/L2-F	4.8x2.8x4.5	940	15/15	0.4	min. 0.129
PT2559B/L2/H2-F	4.8x2.8x4.5	940	15/15	0.4	min. 0.129


Infrared LED and Silicon Detector | Photo Transistor | Lamp

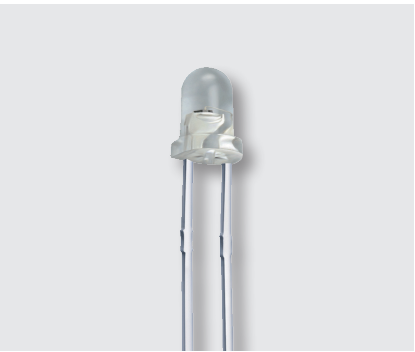


UNIT : mm

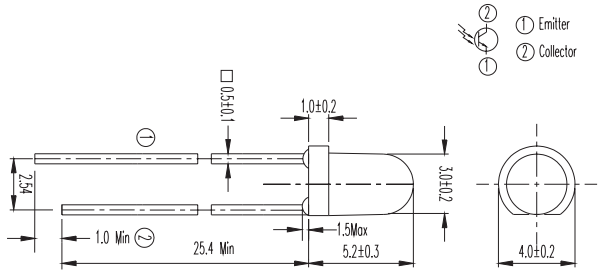


Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT204-6C	3	940	15/15	0.4	2

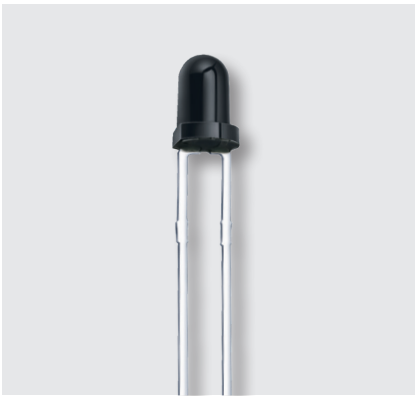


UNIT : mm

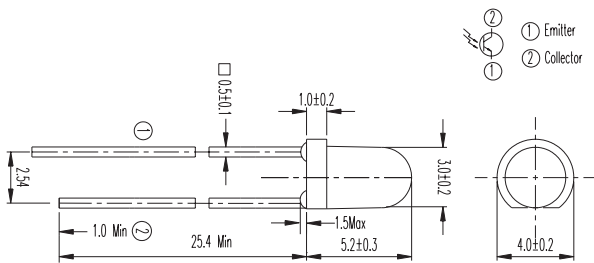

Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT204-6B	3	940	15/15	0.4	min. 0.7

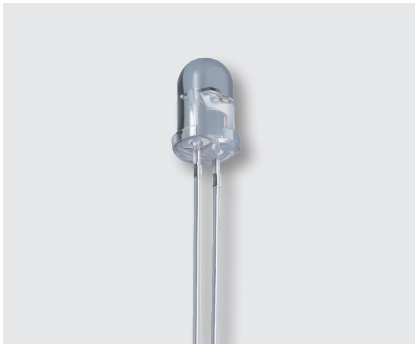


UNIT : mm

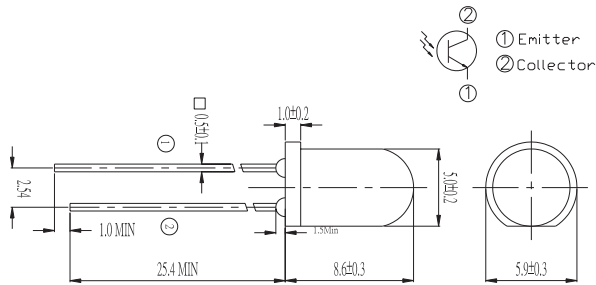


Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT333-3C	5	940	15/15	0.4	4


Infrared LED and Silicon Detector | Photo Transistor | Lamp

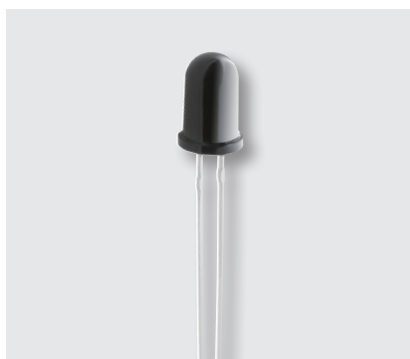


UNIT : mm

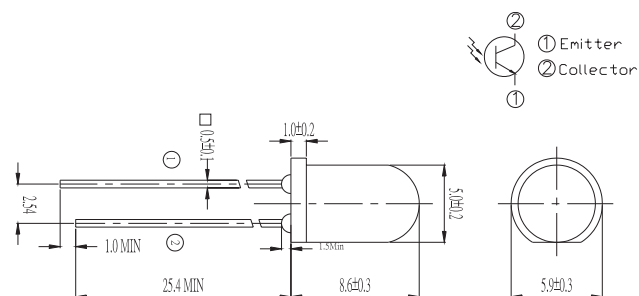

Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT333-3B	5	940	15/15	0.4	3

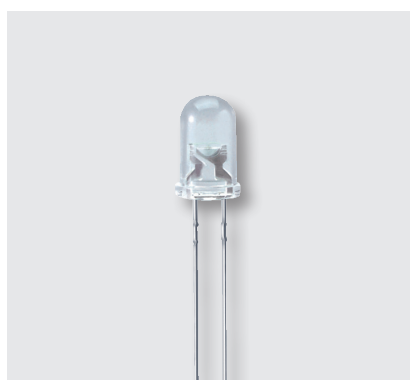


UNIT : mm

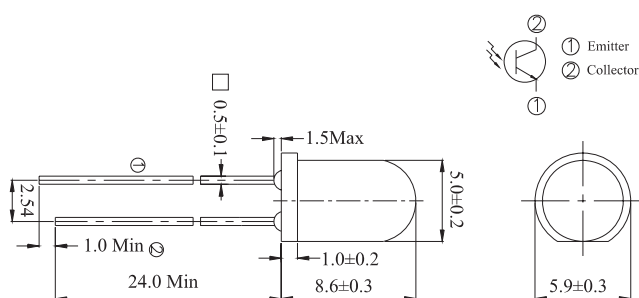

Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT334-6C	5	940	15/15	0.4	3.5




UNIT : mm

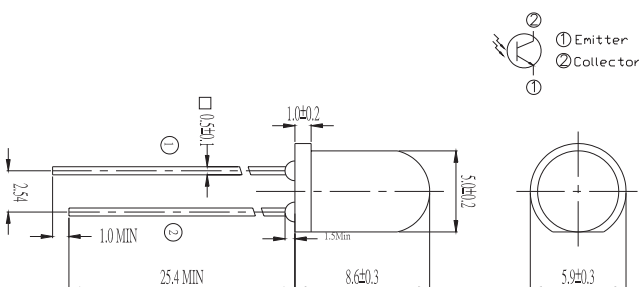


Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT334-6B	5	940	15/15	0.4	2

Infrared LED and Silicon Detector | Photo Transistor | Lamp

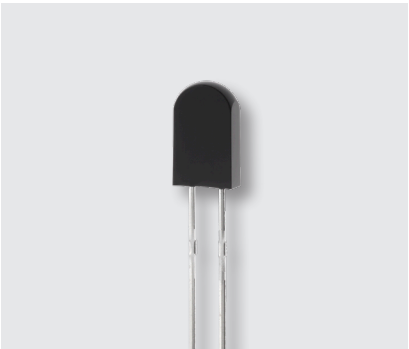


UNIT : mm

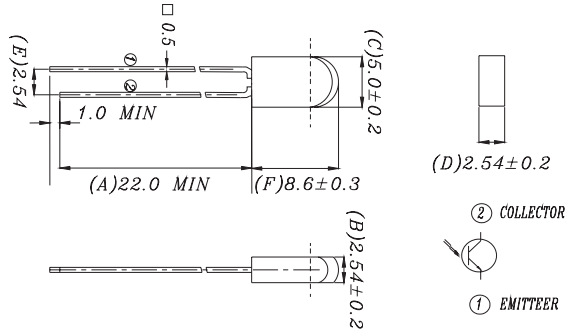

Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT534-6B	5	980	15/15	0.4	1.2



UNIT : mm

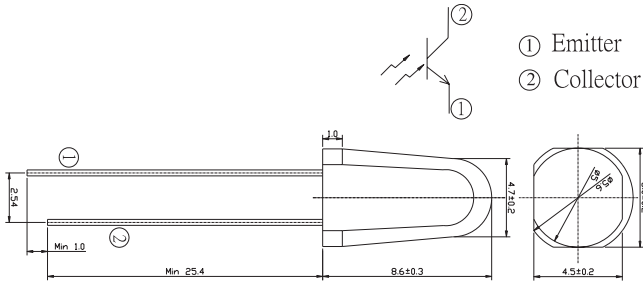


Product	Dimension (mm)	λ_p (nm)	Rise / Fall Time (μ S)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Typ)}$ (mA)
PT1504-6B	5	940	15/15	0.4	4

Infrared LED and Silicon Detector | Photo Transistor | SMD




UNIT : mm

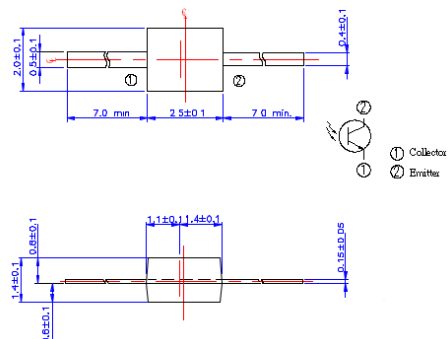


Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT28-21B	2.5x2.0x1.4	940	0.1	0.3	0.4




UNIT : mm



Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT91-21B/L369/TR10	2.5x2.0x2.7	940	2.5	4.5	0.4

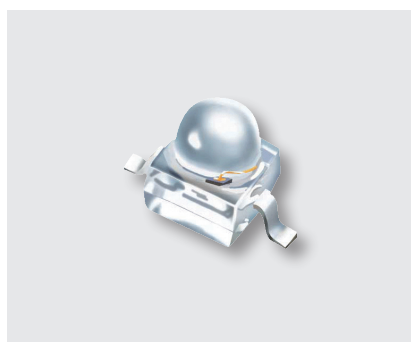


UNIT : mm




Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT95-21C/TR7	2.1x2.0x2.7	940	1	1.5	0.4


Infrared LED and Silicon Detector | Photo Transistor | SMD

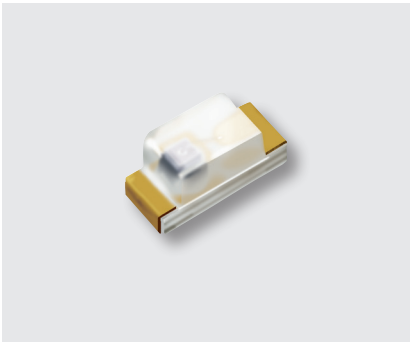


UNIT : mm

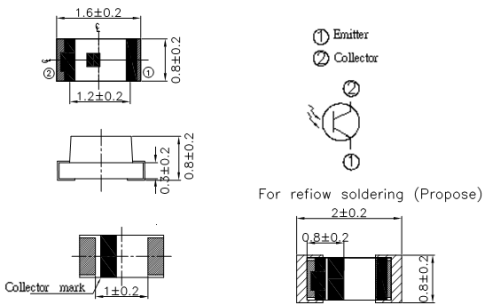


Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT19-21C/L41/TR8	1.6x0.8x0.8	940	0.3	0.6	0.4

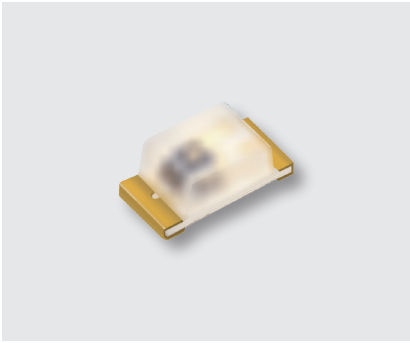


UNIT : mm



Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT19-315C/TR8	1.7x0.8x0.6	940	0.1	1.5	0.4

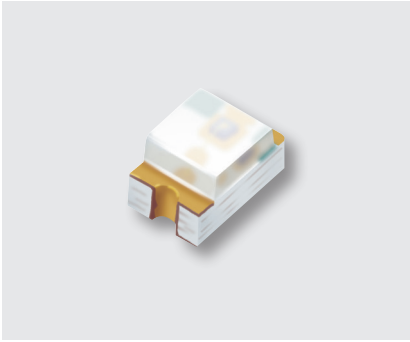

UNIT : mm

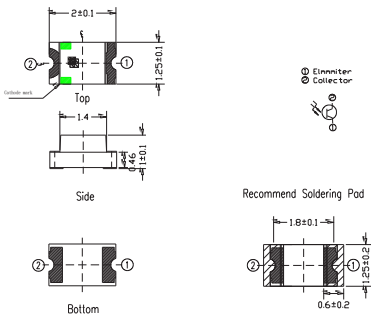


Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT17-21C/L41/TR8	2.0x1.25x1.0	940	0.3	1	0.4


Figure 1 shows the dimensional drawings of the collector and base plate. The top view shows a circular collector with a central hole (Ø1), a surrounding ring (2xØ1.5), and a base plate with a central hole (Ø1.64±0.1) and a surrounding ring (2xØ1). The side view shows the collector with a height of 2xØ1.5 and a base plate with a height of 1.64±0.1. The bottom view shows the collector with a central hole (Ø1) and a base plate with a central hole (Ø1.64±0.1) and a surrounding ring (2xØ1). The side view shows the collector with a height of 2xØ1.5 and a base plate with a height of 1.64±0.1. The bottom view shows the collector with a central hole (Ø1) and a base plate with a central hole (Ø1.64±0.1) and a surrounding ring (2xØ1).

237


Infrared LED and Silicon Detector | Photo Transistor | SMD

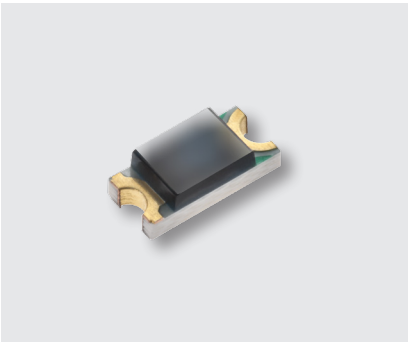


UNIT : mm

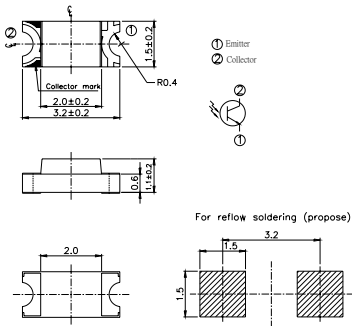


Product	Dimension (mm)	λ_p (nm)	$I_{C(on)_{Min}}$ (mA)	$I_{C(on)_{Typ}}$ (mA)	$V_{ce(sat)_{Max}}$ (V)
PT15-21B/TR8	3.2x1.5x1.1	940	0.1	0.3	0.4

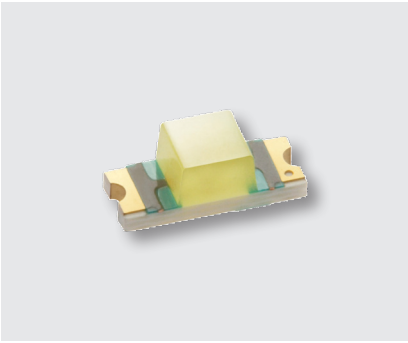


UNIT : mm

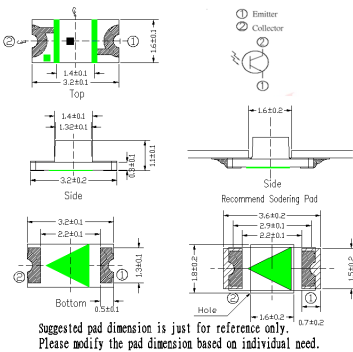

Product	Dimension (mm)	λ_p (nm)	$I_{C(on)_{Min}}$ (mA)	$I_{C(on)_{Typ}}$ (mA)	$V_{ce(sat)_{Max}}$ (V)
PT23-21B/TR8	3.2x1.6x1.1	940	0.1	0.35	0.4

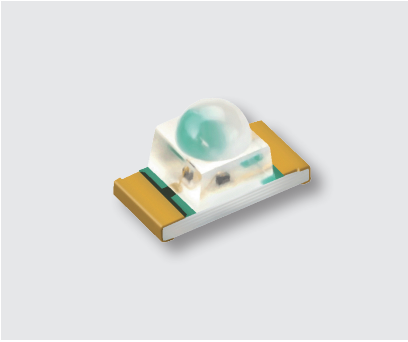


UNIT : mm

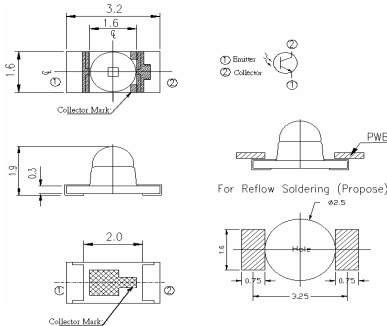


Product	Dimension (mm)	λ_p (nm)	$I_{C(on)_{Min}}$ (mA)	$I_{C(on)_{Typ}}$ (mA)	$V_{ce(sat)_{Max}}$ (V)
PT26-21C/TR8	3.2x1.6x1.9	940	0.3	2.6	0.4

Infrared LED and Silicon Detector | Photo Transistor | SMD

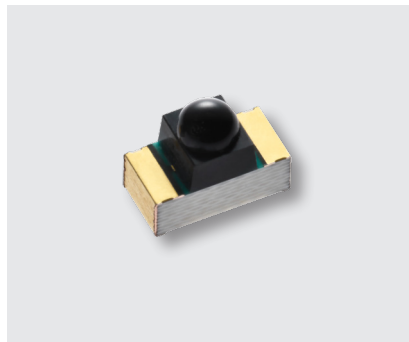


UNIT : mm

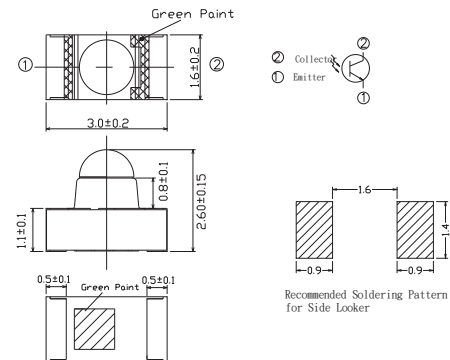


Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT26-51B/T/TR8	3.2x1.6x2.6	940	0.1	1	0.4




UNIT : mm

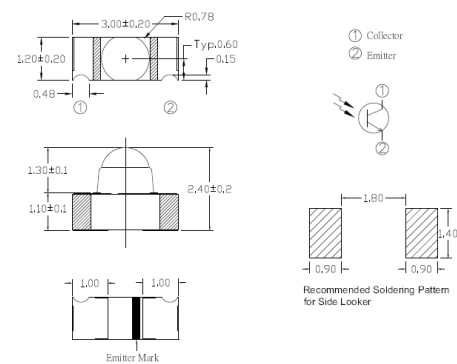

Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT26-71B/TR8	3.2x1.6x2.4	940	1.14	3	0.4

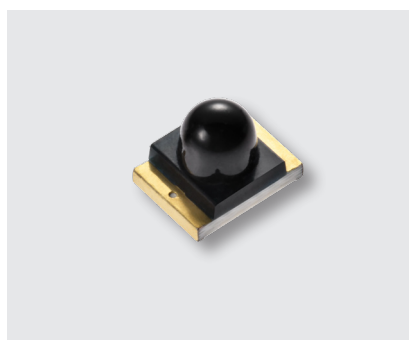

UNIT : mm

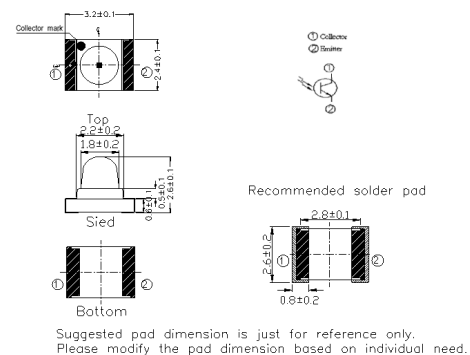


Product	Dimension (mm)	λ_p (nm)	$I_{C(on)}_{Min}$ (mA)	$I_{C(on)}_{Typ}$ (mA)	$V_{ce(sat)}_{Max}(V)$
PT42-21B/TR8	3.2x2.4x2.5	940	1.77	3	0.4

Infrared LED and Silicon Detector | Photo Transistor | SMD




UNIT : mm

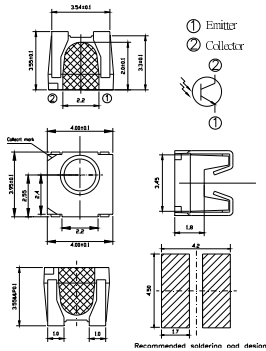

Product	Dimension (mm)	λ_p (nm)	$I_{C(on)_{Min}}$ (mA)	$I_{C(on)_{Typ}}$ (mA)	$V_{ce(sat)_{Max}}$ (V)
PT57-21B/TR8	4.0x3.95x3.3	940	0.4	0.8	0.4



UNIT : mm

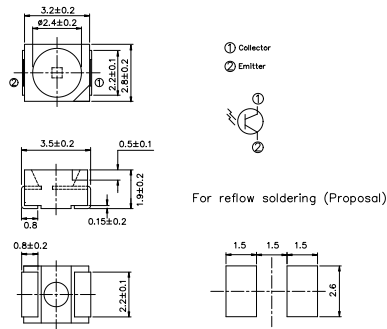


Product	Dimension (mm)	λ_p (nm)	$I_{C(on)_{Min}}$ (mA)	$I_{C(on)_{Typ}}$ (mA)	$V_{ce(sat)_{Max}}$ (V)
PT67-21C/L41/TR8	3.5x2.7x1.8	940	0.3	1	0.4

Infrared Receiver Module ■ IRM-Dip series



UNIT : mm

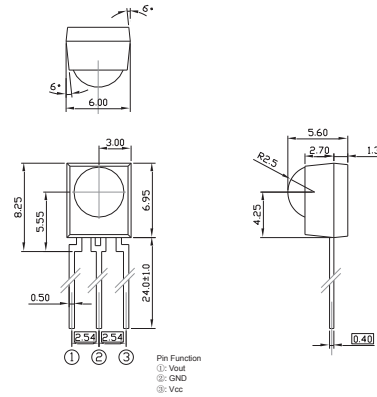


IRM-36xx (Vout-GND-Vcc)

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-36xxJ14	8.25x6.0x5.6	2.7~5.5	36/38/40/56	0.27	20	10	Short Burst
IRM-36xxJ15	8.25x6.0x5.6	2.7~5.5	36/38/40	0.23	20	10	Normal
IRM-36xxJ16	8.25x6.0x5.6	2.7~5.5	36/38/40	0.27	20	10	Continuous
IRM-36xxJ18	8.25x6.0x5.6	2.7~5.5	36/38/40	0.27	20	10	Continuous
IRM-36xxJ19	8.25x6.0x5.6	2.7~5.5	36/38/40	0.20	20	10	Normal
IRM-36xxJ22	8.25x6.0x5.6	2.7~5.5	36/38/40	0.20	20	10	Normal
IRM-36xxM13	8.25x6.0x5.6	2.7~5.5	36/38/40	0.29	20	10	Normal
IRM-36xxJF	8.25x6.0x5.6	2.7~5.5	36/38/40	0.27	15	7	Fixed gain
IRM-3600JW2	8.25x6.0x5.6	2.7~5.5	20~60	0.27	5	2	Wide band



UNIT : mm

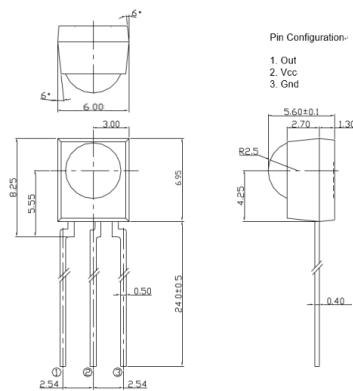


IRM-35xx (Vout-Vcc-GND)

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-35xxJ14	8.25x6.0x5.6	2.7~5.5	36/38/40/56	0.27	20	10	Short Burst
IRM-35xxJ15	8.25x6.0x5.6	2.7~5.5	36/38/40	0.23	20	10	Normal
IRM-35xxJ16	8.25x6.0x5.6	2.7~5.5	36/38/40	0.27	20	10	Continuous
IRM-35xxJ18	8.25x6.0x5.6	2.7~5.5	36/38/40	0.27	20	10	Continuous

Infrared Receiver Module ■ IRM-Dip series




UNIT : mm

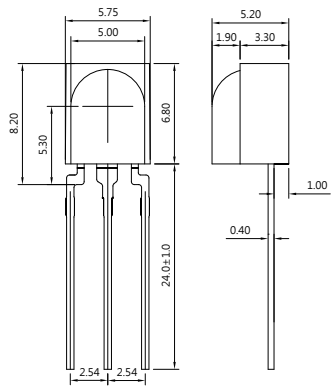


IRM-77xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-77xxJ15	8.10x5.85x5.15	2.7~5.5	36/38/40	0.23	20	10	Normal
IRM-77xxJ16	8.10x5.85x5.15	2.7~5.5	36/38/40	0.27	20	10	Continuous
IRM-77xxJ18	8.10x5.85x5.15	2.7~5.5	36/38/40	0.27	20	10	Continuous

Infrared Receiver Module ■ IRM-SMD series

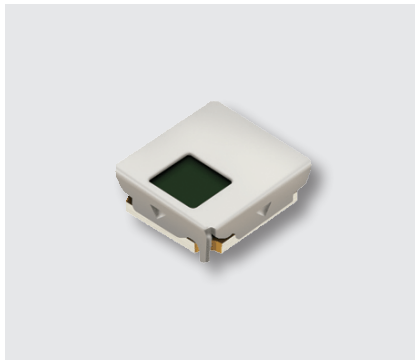


UNIT : mm

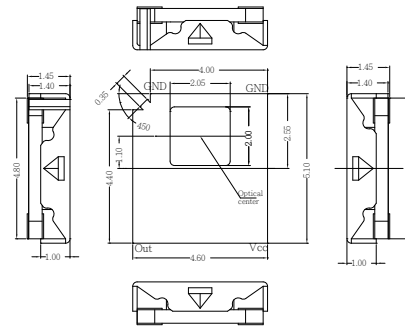


IRM-H2xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-H2xxJ14	5.10x1.45x4.60	2.7~5.5	36/38/40/56	0.27	14	7	Short Burst
IRM-H2xxJ15	5.10x1.45x4.60	2.7~5.5	36/38/40	0.23	14	7	Normal
IRM-H2xxJ16	5.10x1.45x4.60	2.7~5.5	36/38/40	0.27	14	7	Continuous
IRM-H200JW2	5.10x1.45x4.60	2.7~5.5	20~60	0.27	5	2	Wide band

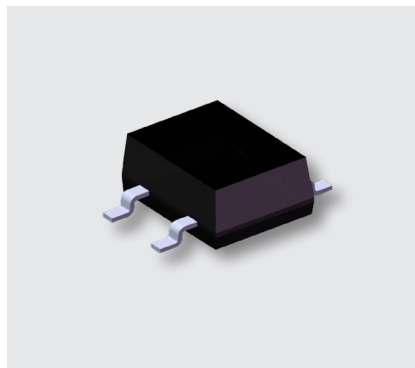


UNIT : mm

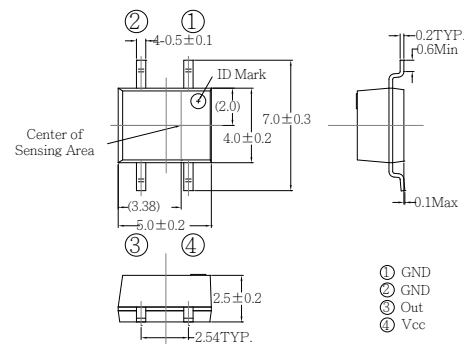


IRM-H9xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-H9xxJ14	5.00x2.50x4.00	2.7~5.5	36/38/40/56	0.27	14	7	Short Burst
IRM-H9xxJ15	5.00x2.50x4.00	2.7~5.5	36/38/40	0.23	14	7	Normal
IRM-H9xxJ16	5.00x2.50x4.00	2.7~5.5	36/38/40	0.27	14	7	Continuous

Infrared Receiver Module I IRM-SMD series

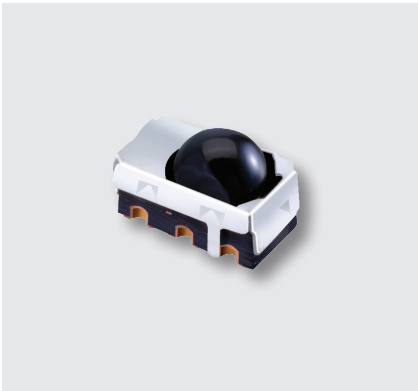

UNIT : mm

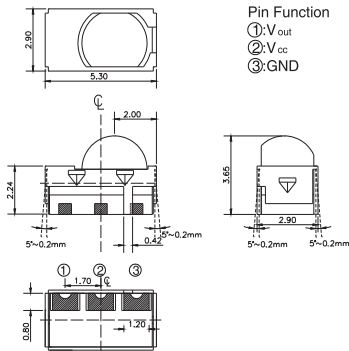


IRM-H5xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-H5xxJ14	5.30x3.65x2.90	2.7~5.5	36/38/40/56	0.27	14	7	Short Burst
IRM-H5xxJ15	5.30x3.65x2.90	2.7~5.5	36/38/40	0.23	14	7	Normal
IRM-H5xxJ16	5.30x3.65x2.90	2.7~5.5	36/38/40	0.27	14	7	Continuous



UNIT : mm

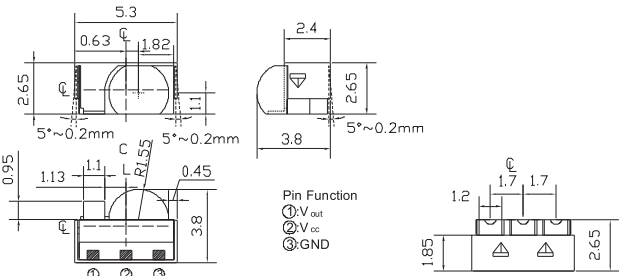


IRM-V5xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-V5xxJ14	5.30x2.65x3.80	2.7~5.5	36/38/40/56	0.27	14	7	Short Burst
IRM-V5xxJ15	5.30x2.65x3.80	2.7~5.5	36/38/40	0.23	14	7	Normal
IRM-V5xxJ16	5.30x2.65x3.80	2.7~5.5	36/38/40	0.27	14	7	Continuous

Infrared Receiver Module I IRM-SMD series



UNIT : mm




IRM-H6xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-H6xxJ14	5.00x4.00x4.00	2.7~5.5	36/38/40/56	0.27	20	10	Short Burst
IRM-H6xxJ15	5.00x4.00x4.00	2.7~5.5	36/38/40	0.23	20	10	Normal
IRM-H6xxJ16	5.00x4.00x4.00	2.7~5.5	36/38/40	0.27	20	10	Continuous
IRM-H6xxJ22	5.00x4.00x4.00	2.7~5.5	36/38/40	0.20	20	10	Normal
IRM-H6xxJF	5.00x4.00x4.00	2.7~5.5	36/38/40	0.27	15	7	Fixed gain



UNIT : mm

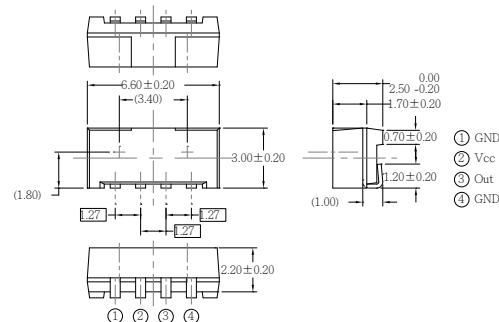

IRM-H3xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-H3xxJ14	6.60x3.00x2.50	2.7~5.5	36/38/40/56	0.27	14	7	Short Burst
IRM-H3xxJ15	6.60x3.00x2.50	2.7~5.5	36/38/40	0.23	14	7	Normal
IRM-H3xxJ16	6.60x3.00x2.50	2.7~5.5	36/38/40	0.27	14	7	Continuous

Pin Configuration

1	GND
2	VCC
3	OUT
4	GND

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-V8xxJ14	6.60x3.00x3.20	2.7~5.5	36/38/40/56	0.27	20	10	Short Burst
IRM-V8xxJ15	6.60x3.00x3.20	2.7~5.5	36/38/40	0.23	20	10	Normal
IRM-V8xxJ16	6.60x3.00x3.20	2.7~5.5	36/38/40	0.27	20	10	Continuous
IRM-V8xxM13	6.60x3.00x3.20	2.7~5.5	36/38/40	0.29	20	10	Normal
IRM-V800JW2	6.60x3.00x3.20	2.7~5.5	20~60	0.27	5	2	Wide band




Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-H8xxJ14	6.60x3.20x3.00	2.7~5.5	36/38/40/56	0.27	20	10	Short Burst
IRM-H8xxJ15	6.60x3.20x3.00	2.7~5.5	36/38/40	0.23	20	10	Normal
IRM-H8xxJ16	6.60x3.20x3.00	2.7~5.5	36/38/40	0.27	20	10	Continuous
IRM-H8xxM13	6.60x3.20x3.00	2.7~5.5	36/38/40	0.29	20	10	Normal
IRM-H8xxJ18	6.60x3.20x3.00	2.7~5.5	36/38/40	0.27	20	10	Continuous

Infrared Receiver Module ■ IRM-SMD series



UNIT : mm

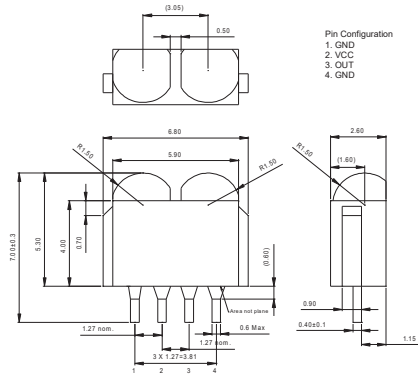


IRM-V11xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-V11xxJ16	6.80x2.60x5.30	2.7~5.5	36/38/40	0.27	20	10	Continuous
IRM-V11xxJ18	6.80x2.60x5.30	2.7~5.5	36/38/40	0.27	20	10	Continuous




UNIT : mm

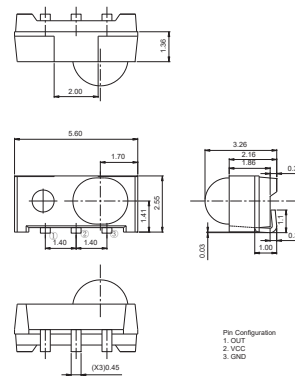


IRM-V16xx

Product	Dimension HxLxD(mm)	Supply Voltage(V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Reception Range L45 typ.(m)	Features
IRM-V16xxJ15	2.55x5.60x3.26	2.7~5.5	36/38/40	0.23	14	7	Normal
IRM-V16xxJ16	2.55x5.60x3.26	2.7~5.5	36/38/40	0.27	14	7	Continuous
IRM-V16xxJ18	2.55x5.60x3.26	2.7~5.5	36/38/40	0.27	14	7	Continuous

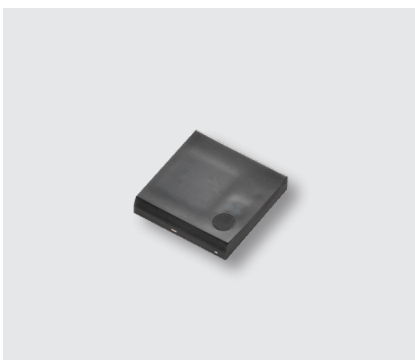


UNIT : mm

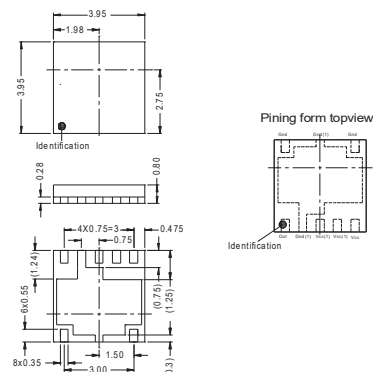


IRM-HQxx (QFN Package)

Product	Dimension WxHxD (mm)	Supply Voltage (V)	Carrier Freq. (KHz)	Supply Current Typ. (mA)	Reception Range L0 Typ.(m)	Half viewing angle Typ. (degree)	Reception Range L45 typ.(m)
IRM-HQxxJ16	3.95x0.80x3.95	2.7~5.5	36/38/40	0.27	40	34	Continuous
IRM-HQxxJ18	3.95x0.80x3.95	2.7~5.5	36/38/40	0.27	40	34	Continuous


Optic-Fiber Device (Photo Link) ■ Transmitter (PLT) Component

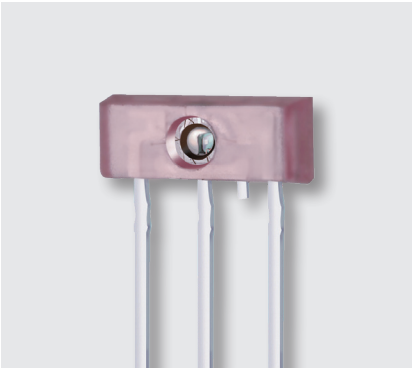


UNIT : mm

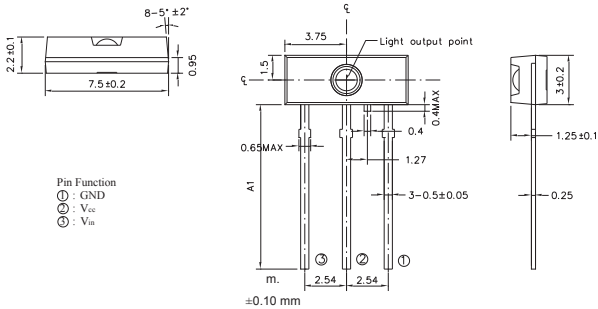

Product	Dimension (mm)	Fiber Coupling Receiver Power_Max (dBm)	Fiber Coupling Receiver Power_Min (dBm)	Operation Voltage(V)	Trans - mission Speed (Mb/s)	L/F Thicknes(mm)
PLT137	7.5x3.0x2.2	-15	-21	2.7~5.5	16	0.25
PLT237	7.5x3.0x2.2	-14	-21	3.0~5.0	25	0.25

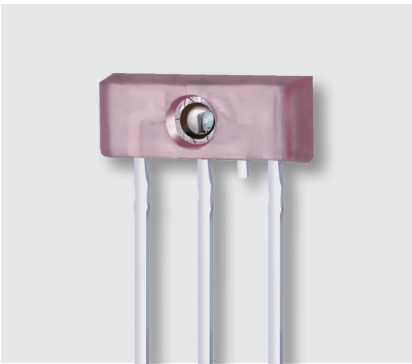

UNIT : mm

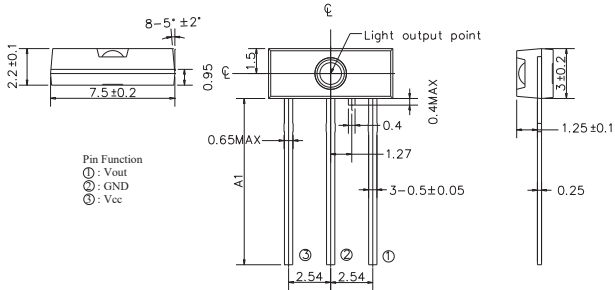


Product	Dimension (mm)	Fiber Coupling Receiver Power_Max (dBm)	Fiber Coupling Receiver Power_Min (dBm)	Operation Voltage(V)	Trans - mission Speed (Mb/s)	L/F Thicknes(mm)
PLR137	7.5x3.0x2.2	-14	-27	2.4~5.5	16	0.25
PLR237	7.5x3.0x2.2	-14	-27	2.4~5.5	25	0.25

Optic-Fiber Device (Photo Link)

Optical Switch I Encoder



UNIT : mm

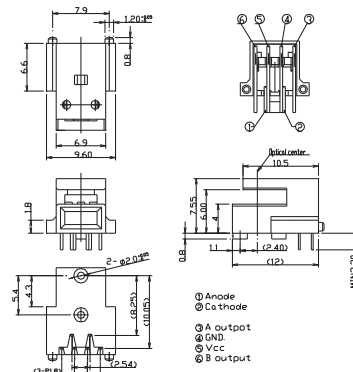


Product	Dimension LxWxH (mm)	Gap Distance (mm)	Supply voltage (V)	Resolution (LPI)	VF_Typ (V)
ECD04Txx20F/TB	9.6x12.0x7.55	2	2.7~5.5	150/300	1.6

Optical Switch I Transmissive Type




UNIT : mm

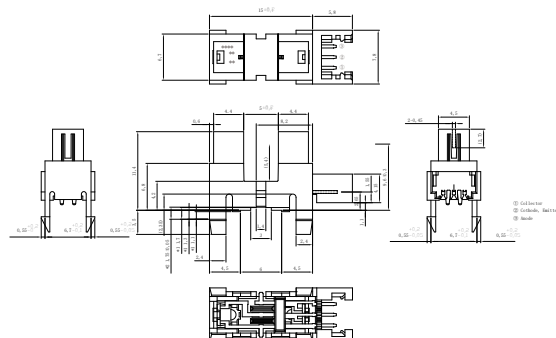

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	VF_Typ (V)	VF_Max (V)	VCE(SAT)_Max (V)	IC(ON)_Min (mA)	ICEO_Max. (nA)
ITR1601CT50A/TB	20.8x14.9x7.8	5	1.18	1.4	0.4	0.25	100




UNIT : mm

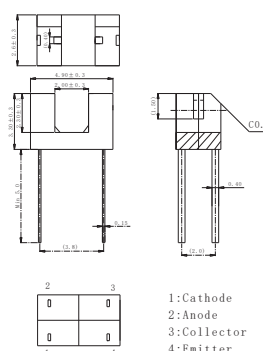


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	VF_Typ (V)	VF_Max (V)	VCE(SAT)_Max (V)	IC(ON)_Min (mA)	ICEO_Max. (nA)
ITR2153DT20A/TB	4.9x2.6x3.3	2	-	1.6	0.4	0.18	100

Optical Switch ■ Transmissive Type

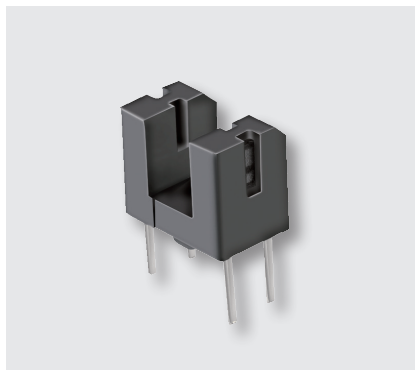


UNIT : mm

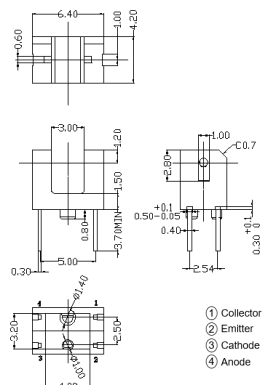


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	V _F _Typ (V)	V _F _Max (V)	V _{CE(SAT)} _Max (V)	I _{C(ON)} _Min (mA)	I _{CEO} _Max. (nA)
ITR20403	6.4x4.2x5.4	3	1.23	1.6	0.4	0.2	100




UNIT : mm

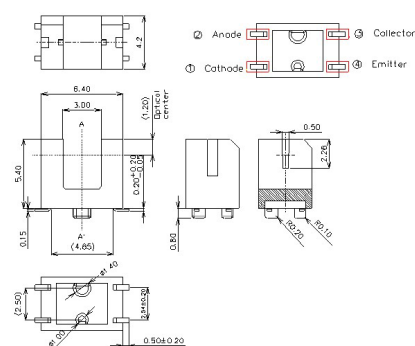

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	V _F _Typ (V)	V _F _Max (V)	V _{CE(SAT)} _Max (V)	I _{C(ON)} _Min (mA)	I _{CEO} _Max. (nA)
ITR2006ST30A/TR	6.4x4.2x5.4	3	1.23	1.6	0.4	0.2	100

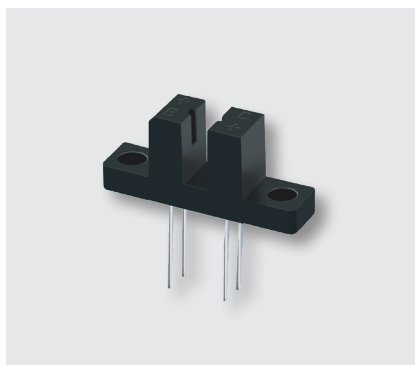


UNIT : mm

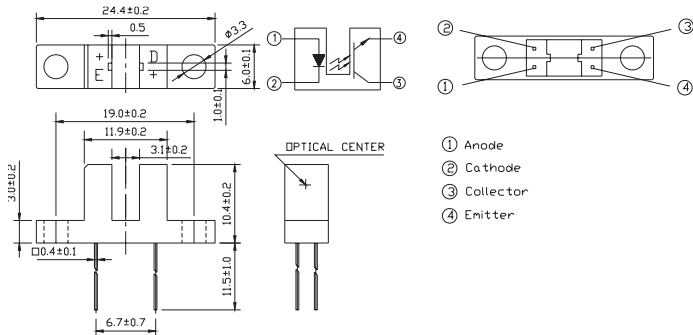


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	V _F _Typ (V)	V _F _Max (V)	V _{CE(SAT)} _Max (V)	I _{C(ON)} _Min (mA)	I _{CEO} _Max. (nA)
ITR8102	24.4x6.0x10.4	3.1	1.25	1.6	0.4	0.9	100

Optical Switch I Transmissive Type

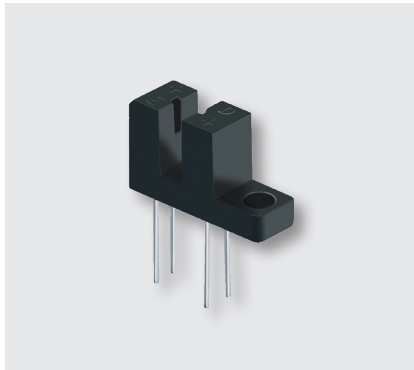


UNIT : mm

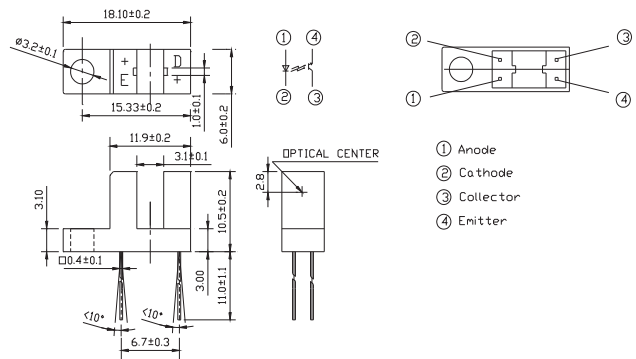


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8104	18.1x6.0x10.5	3.1	1.2	1.6	0.4	0.5	100




UNIT : mm

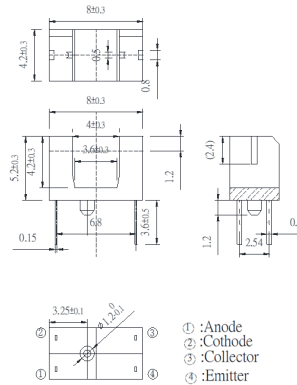

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR2253DT40A/TB	8.0x4.2x5.2	4	1.2	1.6	0.4	0.2	100

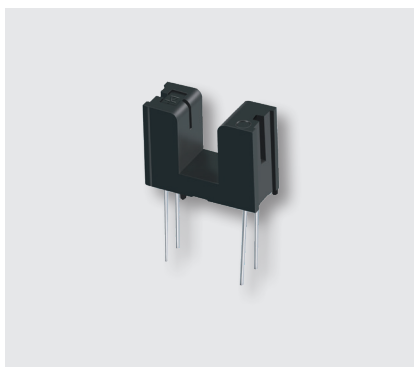


UNIT : mm

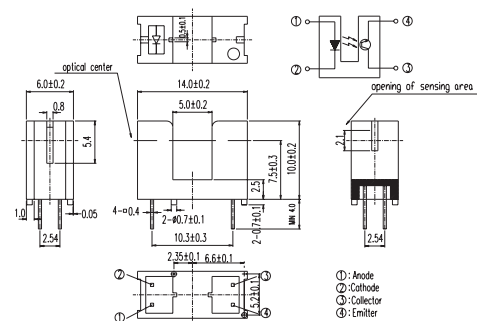


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR9606-F	14.0x6.0x10.0	5.0	1.2	1.5	0.4	3.0	100


Optical Switch I Transmissive Type

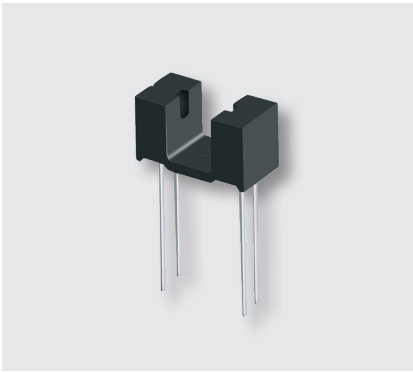


UNIT : mm

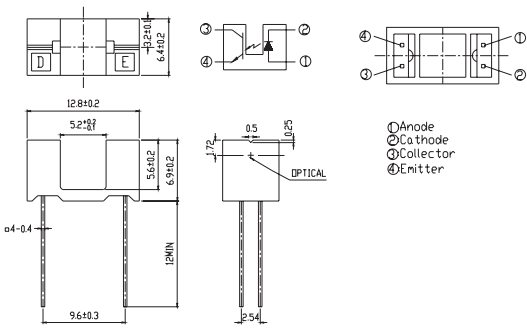

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR9707	12.8x6.4x6.9	5.2	1.2	1.5	0.4	0.5	100

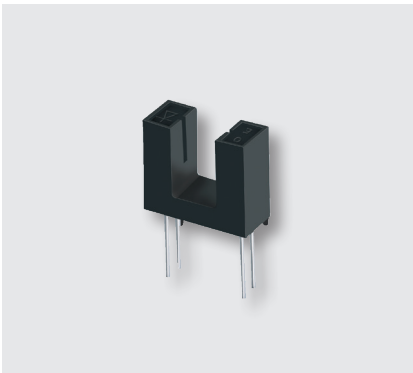

UNIT : mm

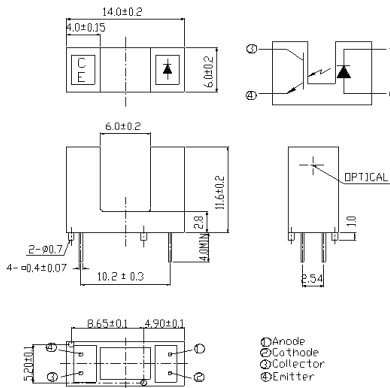


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Gap Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8402-F-A	14.0x6.0x11.6	6	1.2	1.5	0.4	0.5	100

Optical Switch I Reflective Type



UNIT : mm

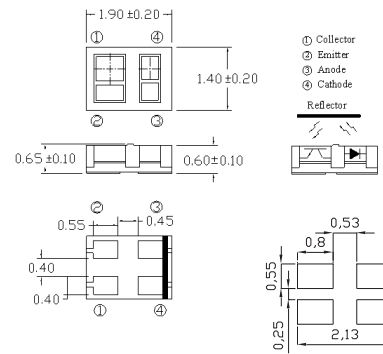


Recommended Soldering Pattern

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR1204SR10A/TR	1.9x1.4x0.65	0.7	1.25	1.5	N/A	0.06	100



UNIT : mm

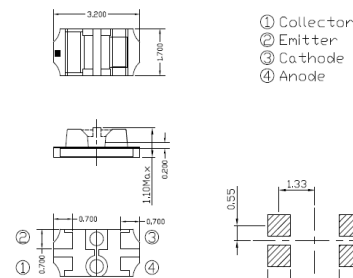


Recommended soldering pad design

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR2001SR10A/TR	2.3x1.7x1.1	1	1.25	1.5	N/A	0.13	100



UNIT : mm

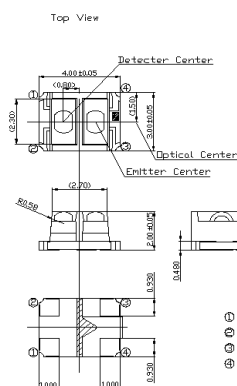


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR1502SR40A/TR8	4.0x3.0x2.0	4.0	1.2	1.4	N/A	0.06	100

Optical Switch | Reflective Type




UNIT : mm

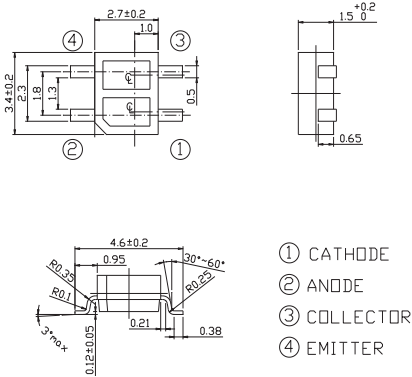

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8307/S17/TR8	4.6x3.4x1.5	1.2	1.2	1.6	0.4	0.18	100
ITR8307/S18/TR8	4.6x3.4x1.5	0.6	1.2	1.6	0.4	0.3	100




UNIT : mm

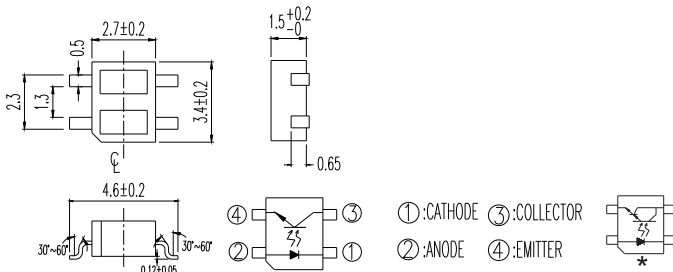

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8307/L24/TR8	4.6x3.4x1.5	0.6	1.2	1.6	1	0.5	100



UNIT : mm

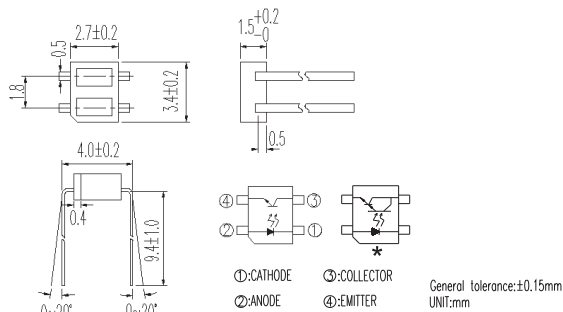


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8307/F43	3.4x2.7x1.5	0.6	1.2	1.6	N/A	0.1	100
ITR8307/L24/F43	3.4x2.7x1.5	0.6	1.2	1.6	1.0	0.5	100

Optical Switch I Reflective Type




UNIT : mm

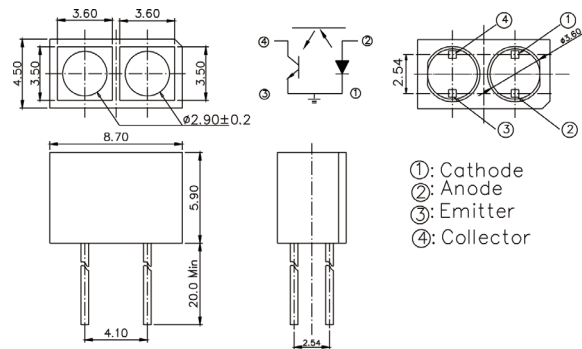


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V_{F_Typ} (V)	V_{F_Max} (V)	$V_{CE(SAT)_Max}$ (V)	$I_{C(ON)_Min}$ (mA)	$I_{CEO_Max.}$ (nA)
ITR9909	8.7x4.5x5.9	>5	1.2	1.5	0.4	9.0	100




UNIT : mm

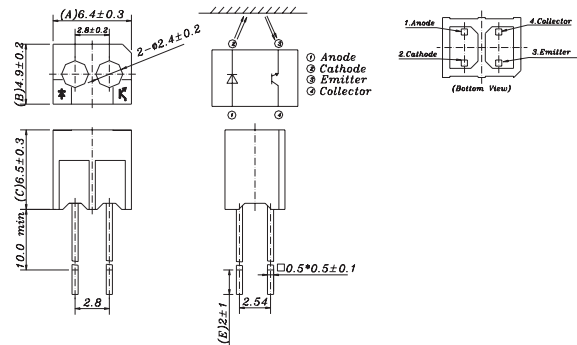

Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V_{F_Typ} (V)	V_{F_Max} (V)	$V_{CE(SAT)_Max}$ (V)	$I_{C(ON)_Min}$ (mA)	$I_{CEO_Max.}$ (nA)
ITR20001/T	6.4x4.9x6.5	>5	1.2	1.5	0.4	0.2	100

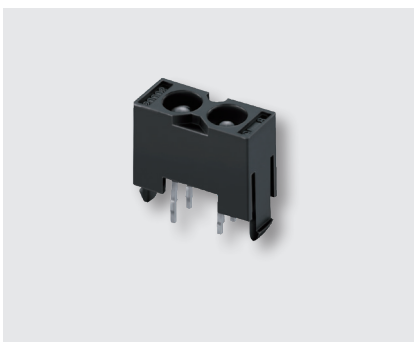


UNIT : mm

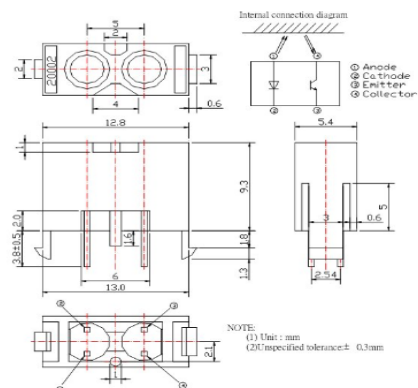


Product	Dimension DIP: LxHxW SMD: LxWxH (mm)	Reflective Distance (mm)	V_{F_Typ} (V)	V_{F_Max} (V)	$V_{CE(SAT)_Max}$ (V)	$I_{C(ON)_Min}$ (mA)	$I_{CEO_Max.}$ (nA)
ITR20002	12.8x5.5x9.3	>5	1.2	1.5	0.4	0.04	100

Optical Sensors | Ambient Light Sensor | Analog

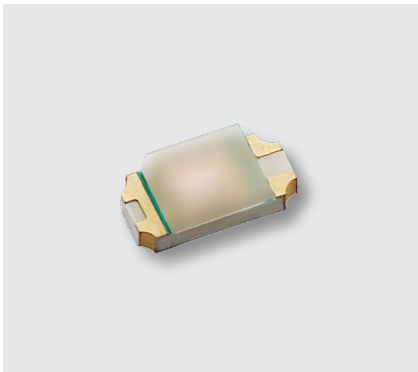


UNIT : mm

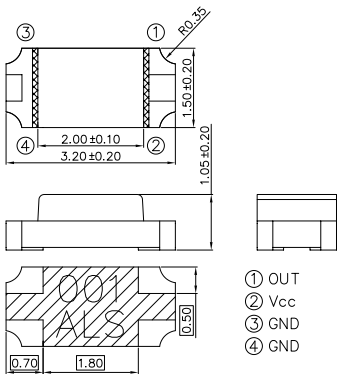


Product	Dimension (mm)	Supply Voltage, Vdd(V)	Peak Sensitivity Wavelength, λp(nm)	Photo current Ev=100lux, Iph(μA)	Max. Dark Current, ID_Max (μA)
ALS-PDIC15-21C/L230/TR8	3.2x1.5x1.1	2.5~5.5	590	36~95	0.1




UNIT : mm

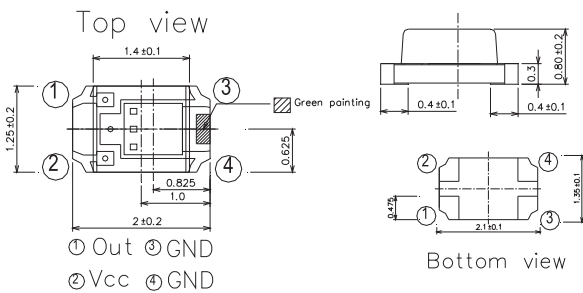

Product	Dimension (mm)	Supply Voltage, Vdd(V)	Peak Sensitivity Wavelength, λp(nm)	Photo current Ev=100lux, Iph(μA)	Max. Dark Current, ID_Max (μA)
ALS-PDIC17-55C/TR8	2x1.25x0.8	1.8~5.5	590	27~54	0.1

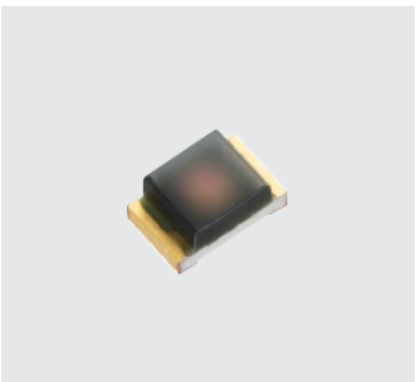

UNIT : mm

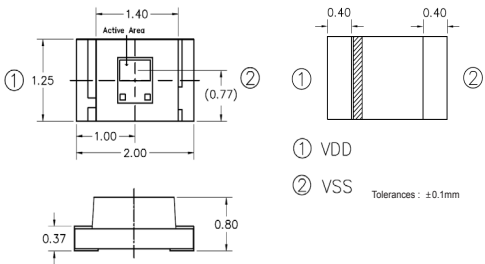


Product	Dimension (mm)	Supply Voltage, Vdd(V)	Peak Sensitivity Wavelength, λp(nm)	Photo current Ev=100lux, Iph(μA)	Max. Dark Current, ID_Max (μA)
ALS-PDIC17-51B/L758/TR8	2x1.25x0.8	2~5.5	570	29~55	0.03


Optical Sensors | Ambient Light Sensor | Analog




UNIT : mm

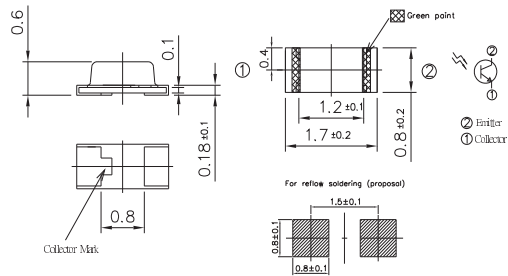


Product	Dimension (mm)	Supply Voltage, V _{dd} (V)	Peak Sensitivity Wavelength, λ _p (nm)	Photo current E _v =100lux, I _{ph} (μA)	Max. Dark Current, I _{D_Max} (μA)
ALS-PT19-315C/L177/TR8	1.7x0.8x0.6	2.5~5.5	630	15	0.1

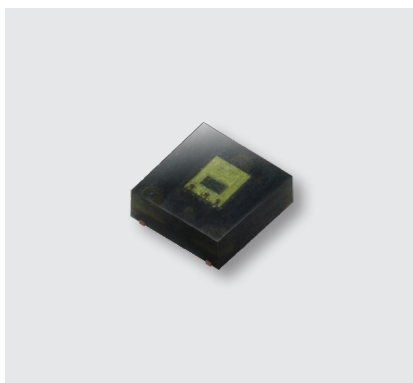


UNIT : mm

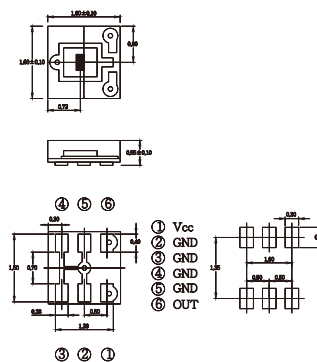

Product	Dimension (mm)	Supply Voltage, V _{dd} (V)	Peak Sensitivity Wavelength, λ _p (nm)	Photo current E _v =100lux, I _{ph} (μA)	Max. Dark Current, I _{D_Max} (μA)
ALS-PDIC17-77B/TR8	1.6x1.6x0.55	1.8~5.5	580	40~80	0.1

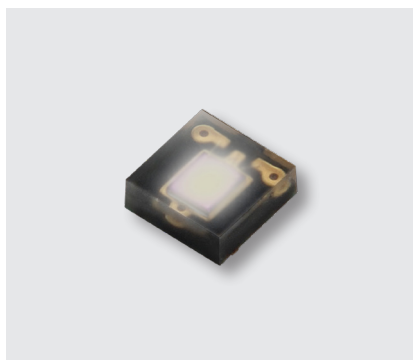


UNIT : mm

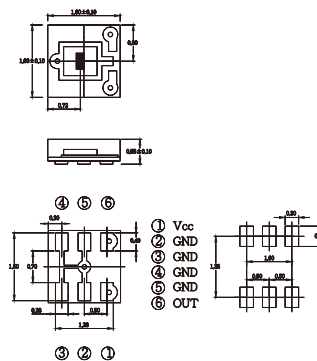



Product	Dimension (mm)	Supply Voltage, V _{dd} (V)	Peak Sensitivity Wavelength, λ _p (nm)	Photo current E _v =100lux, I _{ph} (μA)	Max. Dark Current, I _{D_Max} (μA)
ALS-PDIC17-77C/TR8	1.6x1.6x0.55	1.8~5.5	550	27~54	0.1

Optical Sensors | Ambient Light Sensor | Analog

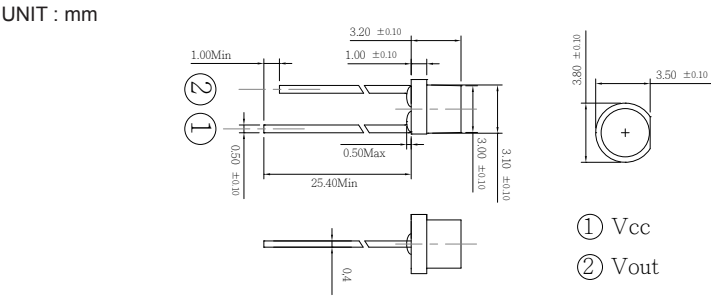


Product	Dimension (mm)	Supply Voltage, Vdd(V)	Peak Sensitivity Wavelength, λp(nm)	Photo current Ev=100lux, Iph(μA)	Max. Dark Current, ID_Max (μA)
ALS-PDIC144-6C/L378	3.8x3.5x3.2	1.8~5.5	550	22~44	0.1
ALS-PDT144-6C/L451	3.8x3.5x3.2	3~24	790	280~700	0.1

Optical Sensors

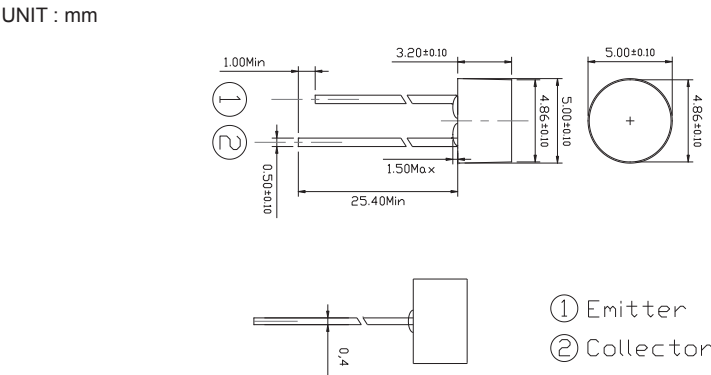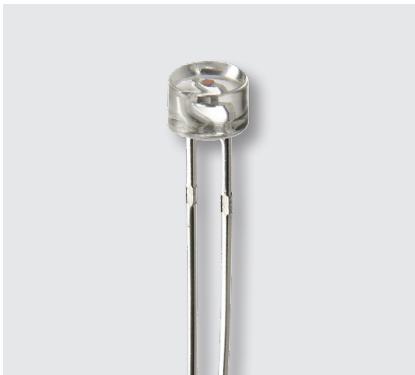


Product	Dimension (mm)	Supply Voltage, Vdd(V)	Peak Sensitivity Wavelength, λp(nm)	Photo current Ev=100lux, Iph(μA)	Max. Dark Current, ID_Max (μA)
ALS-PDT243-3C/L451	5.0x5.0x3.2	3~24	790	285~720	0.1

Optical Sensors | Ambient Light Sensor | Analog

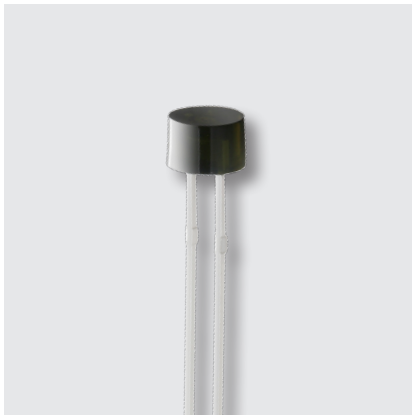


UNIT : mm

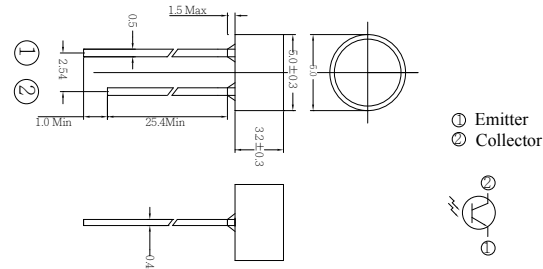


Product	Dimension (mm)	Supply Voltage, Vdd(V)	Peak Sensitivity Wavelength, λ_p (nm)	Photo current $E_v=100\text{lux}$, $I_{ph}(\mu\text{A})$	Max. Dark Current, $I_{D_Max}(\mu\text{A})$
ALS-PDIC243-3B	5.0x5.0x3.2	1.8~5.5	560	10~35	0.1
ALS-PDIC243-3B/L716	5.0x5.0x3.2	2~5.5	560	7~24	0.05

Optical Sensors | Ambient Light Sensor | Digital

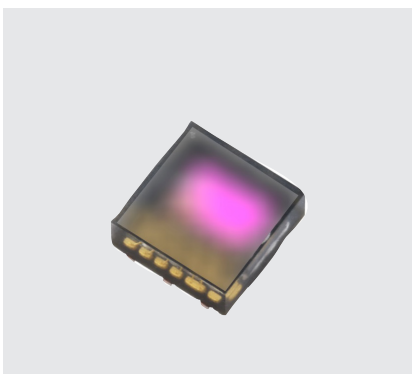


UNIT : mm

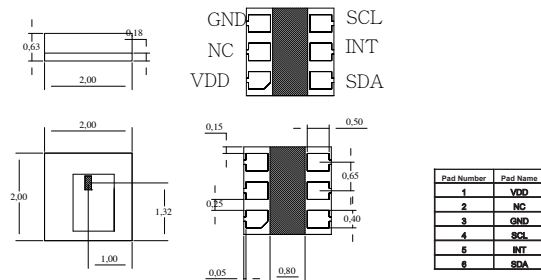


Product	Dimension (mm)	Supply Voltage, Vdd(V)	Supply Current, $I_{dd}(\mu\text{A})$	Peak Sensitivity Wavelength, λ_p (nm)	ALS Photo output $E_v=100\text{lux}$ (count)	ALS Dark output (count)	ADC Resolution (bit)	Maximum Detection (lux)	Lux Resolution (lux)
ALS-DPIC17-78C/L749/TR8	2.00 x 2.00 x 0.63	2.4 ~ 3.6	160	550	CH0 2300 CH1 3100	1	10~16 bit	83000	0.0033


Optical Sensors | Color Sensor | Analog

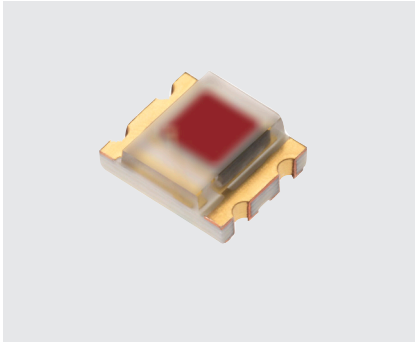


UNIT : mm

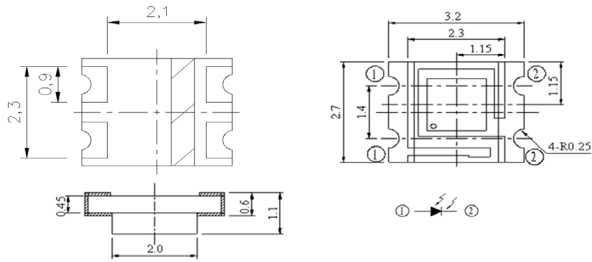


Product	Dimension (mm)	Forward Voltage(V)	Peak Sensitivity Wavelength, λ_p (nm)	Reverse light current (Ee=100lux), IL(uA)
CLS15-22C/L213R/TR8	3.2x2.7x1.1	0.5~1.3	620	0.091

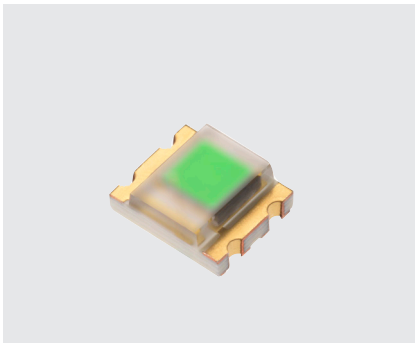


UNIT : mm

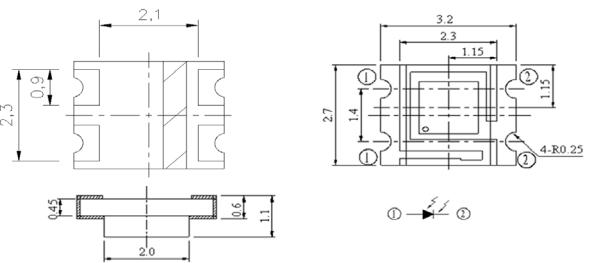

Product	Dimension (mm)	Forward Voltage(V)	Peak Sensitivity Wavelength, λ_p (nm)	Reverse light current (Ee=100lux), IL(uA)
CLS15-22C/L213G/TR8	3.2x2.7x1.1	0.5~1.3	550	0.082

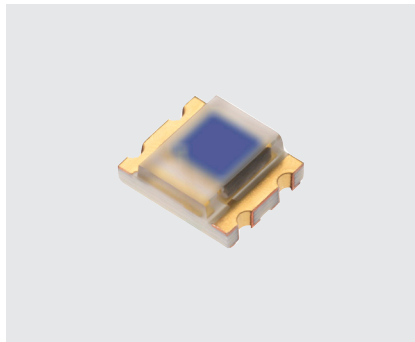


UNIT : mm

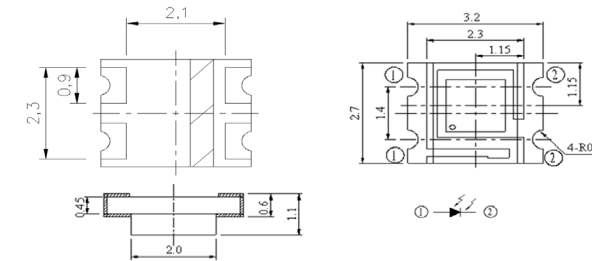


Product	Dimension (mm)	Forward Voltage(V)	Peak Sensitivity Wavelength, λ_p (nm)	Reverse light current (Ee=100lux), IL(uA)
CLS15-22C/L213B/TR8	3.2x2.7x1.1	0.5~1.3	470	0.046

Optical Sensors | Color Sensor | Digital

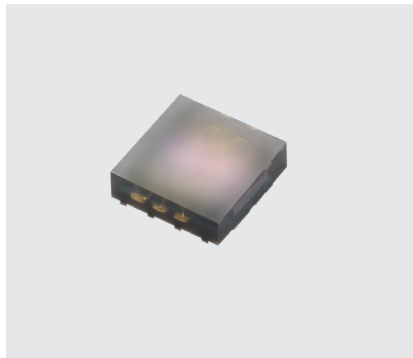

UNIT : mm

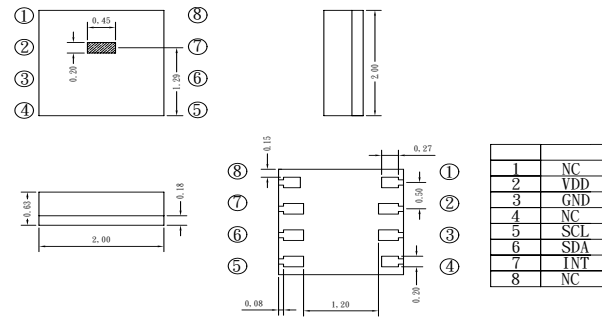


Product	Dimension (mm)	Supply Voltage, VDD(V)	Peak Sensitivity Wavelength λp1(nm)	Supply Current(μA)	ClS Photo Output Ie=20μW/cm2 (count)	ClS Dark Output (count)	Maximum Detection Lux(Lux)
CLS-16D24-44-DF8/TR8	2.00 x 2.00 x 0.63	2.4 ~ 3.6	R 610nm,G 550nm, B 470nm, IR, W	IDD_ON = 210 IDD_OFF = 2.5	CH_Red 1500 CH_Green 3300 CH_Blue 2100 DIOD_SELT =2, PGA_CLS =x 96 , INT_TIME=16 T, CLSCONV=6 INT_TIME	1	204K
B-CPS2020C1-L992-D-2R	2.00 x 2.00 x 0.63	2.4 ~ 3.6	R 630nm,G 530nm, B 480nm, IR, W	IDD_ON = 230(CPS) IDD_ON = 230 (CLS) IDD_OFF = 0.1	CH_Red 6200 CH_Green 8600 CH_Blue 7200 EN_CLS=1, PON=1, 50HZ=1, TIME_BASE=0, TIME_DELAY=0, TIME_WAIT=0, TIME_CLS=0F, Gain_CLS=MAX	2	284K

Optical Sensors

Optical Sensors | Skin sensor




UNIT : mm

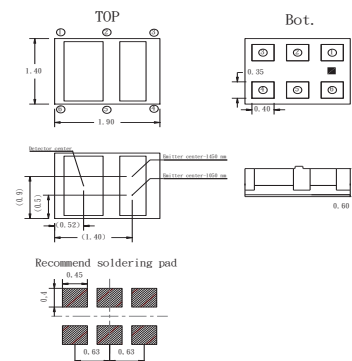


Product	Dimension (mm)	VF1_Typ(V)	λp1_Typ(nm)	VF2_Typ(V)	λp2_Typ(nm)
B-PM1914B3/L973-A-3R	1.9x1.4x0.6	1.13	1050	0.83	1450

Optical Sensors | Proximity Sensor | Digital




UNIT : mm

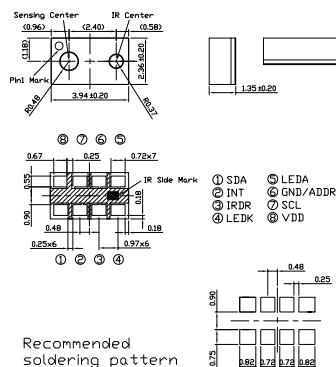

Product	Dimension (mm)	Supply Voltage, Vdd(V)	Supply Current, Idd(uA)	Peak Sensitivity Wavelength, λp(nm)	ALS Photo output Ev=100lux (count)	ALS Dark output (count)	ADC Resolution (bit)	Maximum Detection (lux)	Lux Resolution (lux)	Detection Range	PS ADC Resolution	Emitting Wavelength (nm)
APM-16D24 -U6E-DF8/TR8	3.94x2.36x1.35 Pitch: 2.4mm	2.4 ~ 3.6	IDD_ON = 160 / IDD_OFF = 2.5	550	CH0 1250 CH1 1440 Ev=100Ix, ALS gain 4×, Tint 170ms	1	10-16 bit	20700	0.0033	up to 10cm	8-12 bit	940nm



UNIT : mm

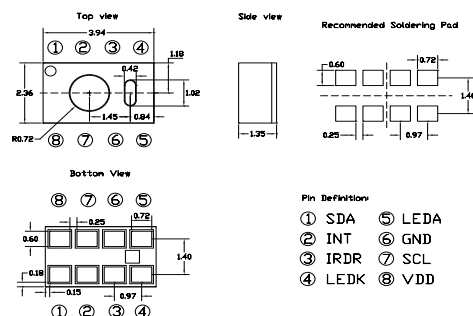


Product	Dimension (mm)	Supply Voltage, Vdd(V)	Supply Current, Idd(uA)	Peak Sensitivity Wavelength, λp(nm)	ALS Photo output Ev=100lux (count)	ALS Dark output (count)	ADC Resolution (bit)	Maximum Detection (lux)	Lux Resolution (lux)	Detection Range	PS ADC Resolution	Emitting Wavelength (nm)
APM-16D24 -310-DF8/TR8	3.94x2.36x1.35 Pitch: 1.45mm	2.4 ~ 3.6	IDD_ON = 260 IDD_OFF = 2.5	550	CH0 3340 CH1 4360 Ev=100Ix, ALS gain32×, Tint 170ms	1	10-16 bit	57000	0.0023	up to 10cm	8-12 bit	940nm

Photo Coupler ■ Photo Transistor ■ 4pin SSOP-AC



UNIT : mm

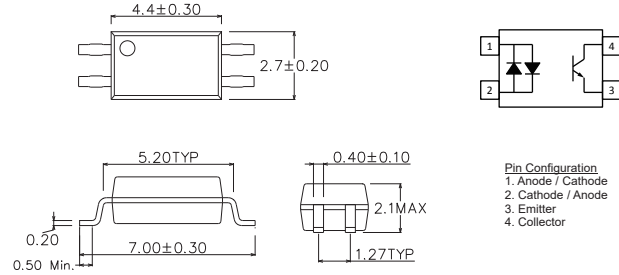


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	T_{OPR} (°C)	Viso (Vrms)
EL3H4-G	4.4x2.7x2.1	High Vceo	1.2	80	0.2	1	20~300	-	-	-55~110	3750
EL3H4U-G	4.4x2.7x2.1	Low Input Current :0.5mA, TOPR=125°C	1.3	60	0.4	0.5	50~600	-	-	-55~125	3750
EV3H4U-G	4.4x2.7x2.1	Low Input Current :0.5mA, TOPR=125°C AECQ101 Certified	1.3	60	0.4	0.5	50~600	-	-	-55~125	3750

Photo Coupler ■ Photo Transistor ■ 4Pin SSOP-DC



UNIT : mm

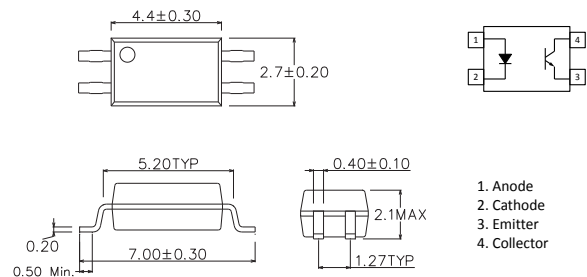


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	T_{OPR} (°C)	Viso (Vrms)
EL3H7-G	4.4x2.7x2.1	High Vceo	1.2	80	0.2	5	50~600	5	3	-55~110	3750
EL3H7L-G	4.4x2.7x2.1	Ultra Low Input Current :0.1mA	1.4	80	0.3	0.1	50~600	5	5	-55~110	3750
EL3H7H-G	4.4x2.7x2.1	TOPR=125°C	1.2	80	0.3	5	80~260	6	8	-55~125	3750
EL3H7U-G	4.4x2.7x2.1	Low Input Current :0.5mA, TOPR=125°C	1.3	60	0.4	0.5	50~600	8	10	-40~125	3750
EV3H7U-G	4.4x2.7x2.1	Low Input Current :0.5mA, TOPR=125°C, AECQ101 Certified	1.3	60	0.4	0.5	50~600	8	10	-40~125	3750
ELC3H7-G	4.4x2.7x2.1	Low Input Current :0.5mA, TOPR=125°C, Flat I_F to CTR	1.3	80	0.3	0.5	50~600	6	8	-40~125	3750

Photo Coupler | Photo Transistor | 4pin SSOP-DC




UNIT : mm

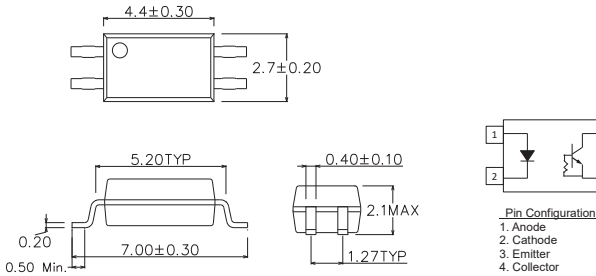


Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	tr (μs)	tf (μs)	ton (μs)	toff (μs)	T _{OPR} (°C)	Viso (Vrms)
EL2HK-G	4.4x2.7x2.1	TOPR=125°C, 20 Kbps Ton&Toff <30us@RL=10 KΩ	1.3	70	0.3	1	100~600	-	-	30 (max)	30 (max)	-40~125	3750

Photo Coupler | Photo Transistor | 16pin SSOP-AC

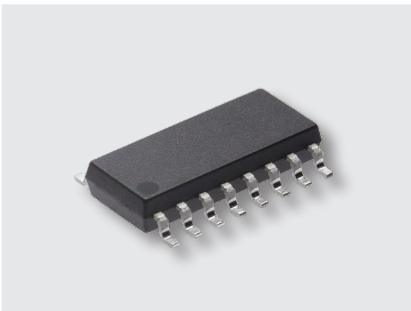


UNIT : mm

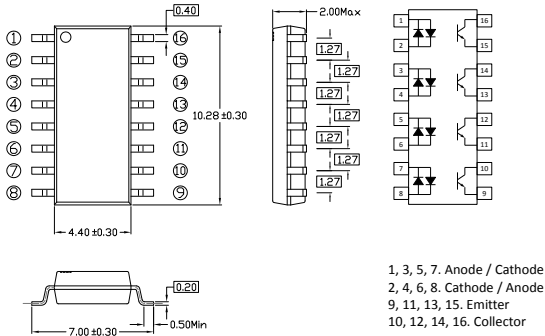


Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	tr (μs)	tf (μs)	T _{OPR} (°C)	Viso (Vrms)
ELQ3H4-G	10.28x4.4x2	4CH, High Vceo	1.2	80	0.2	1	20~300	5	3	-55~110	3750

Photo Coupler | Photo Transistor | 16Pin SSOP-DC

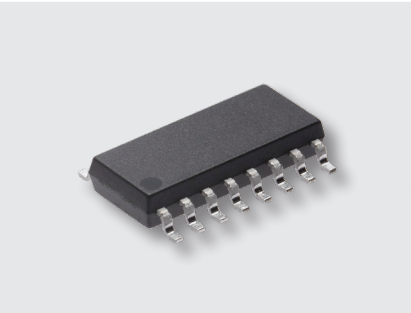


UNIT : mm

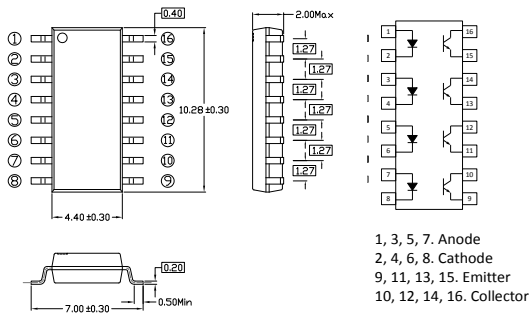


Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	tr (μs)	tf (μs)	T _{OPR} (°C)	Viso (Vrms)
ELQ3H7-G	10.28x4.4x2	4CH, High Vceo	1.2	80	0.2	5	50~600	5	3	-55~110	3750

Photo Coupler ■ Photo Transistor ■ 4pin SOP-AC

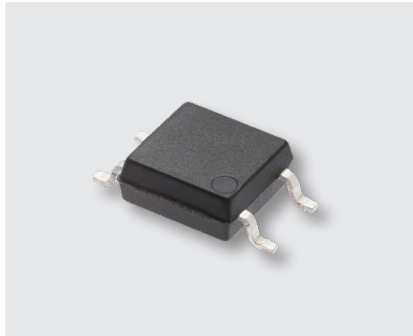

UNIT : mm

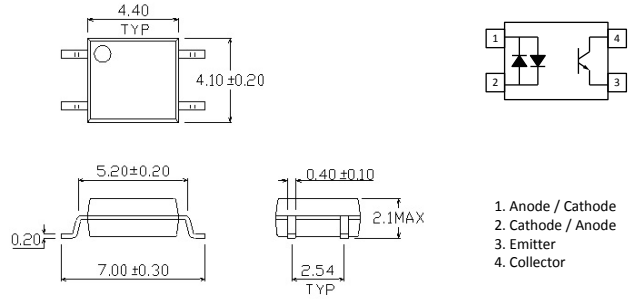


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	T_{OPR} (°C)	Viso (Vrms)
EL354N-G	4.4x4.1x2.1	High Vceo	1.2	80	0.2	1	20~300	-	-	-55~100	3750

Photo Coupler ■ Photo Transistor ■ 4pin SOP-DC




UNIT : mm

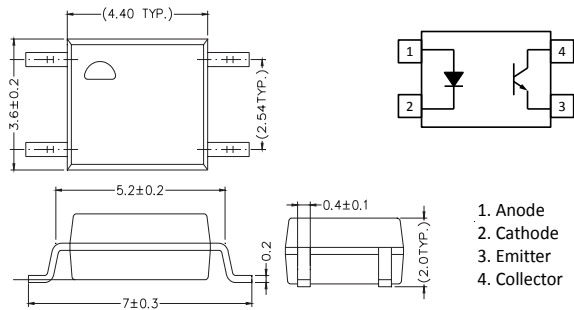

Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	T_{OPR} (°C)	Viso (Vrms)
EL121N-G	4.4x3.6x2	High Vceo	1.2	80	0.2	5	50~400	6	8	-55~110	3750



UNIT : mm

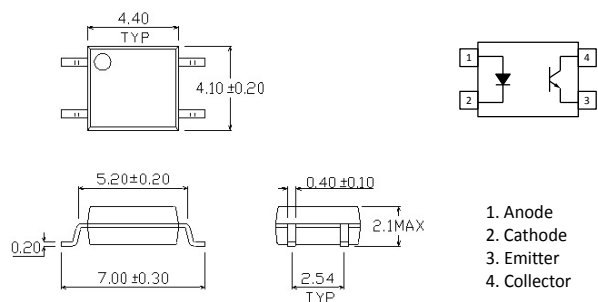


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	T_{OPR} (°C)	Viso (Vrms)
EL357N-G	4.4x4.1x2.1	High Vceo	1.2	80	0.2	5	50~600	3	4	-55~110	3750
EL357NL-G	4.4x4.1x2.1	Ultra Low Input Current :0.1mA	1.3	75	0.4	0.1	50~200	8	12	-55~110	3750
EL357NH-G	4.4x4.1x2.1	TOPR=125°C	1.2	80	0.3	5	50~600	6	8	-55~125	3750
EL357NU-G	4.4x4.1x2.1	Low Input Current :0.5mA, TOPR=125°C	1.3	60	0.4	0.5	50~600	-	-	-40~125	3750
EV357NU-G	4.4x4.1x2.1	Low Input Current :0.5mA, TOPR=125°C, CAECQ101 Certified	1.3	60	0.4	0.5	50~600	-	-	-40~125	3750
ELC357N-G	4.4x4.1x2.1	Low Input Current :0.5mA, TOPR=125, Flat IF to CTR	1.3	80	0.3	0.5	50~600	6	8	-40~125	3750

Photo Coupler | Photo Transistor | 4pin SSOP-DC



UNIT : mm

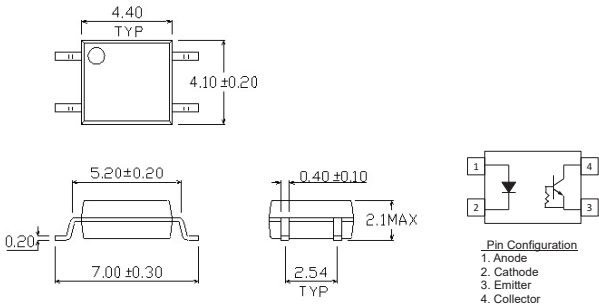


Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	t _r (μs)	t _f (μs)	t _{on} (μs)	t _{off} (μs)	T _{OPR} (°C)	Viso (Vrms)
ELM2K-G	4.4x4.1x2.1	TOPR=125°C, 20 Kbps Ton&Toff <30us@RL=10 KΩ	1.3	70	0.3	1	100~600	-	-	30 (min)	30 (min)	-40~125	3750

Photo Coupler | Photo Transistor | 8pin SOP-DC





UNIT : mm

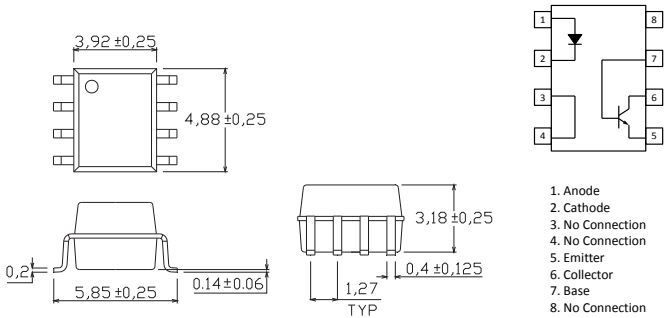

Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	t _r (μs)	t _f (μs)	t _{on} (μs)	t _{off} (μs)	T _{OPR} (°C)	Viso (Vrms)
EL205	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	10	40~80	1.6	2.2	3	3	-55~110	3750
EL206	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	10	63~125	1.6	2.2	3	3	-55~110	3750
EL207	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	10	100~200	1.6	2.2	3	3	-55~110	3750
EL208	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	10	160~320	1.6	2.2	3	3	-55~110	3750
EL211	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	10	>20	1.6	2.2	3	3	-55~110	3750
EL212	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	10	>50	1.6	2.2	3	3	-55~110	3750
EL213	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	10	>100	1.6	2.2	3	3	-55~110	3750
EL215	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	1	>10	1.6	2.2	3	3	-55~110	3750
EL216	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	1	>50	1.6	2.2	3	3	-55~110	3750
EL217	4.88x3.92x3.18	High V _{ceo} , with Base Pin Function	1.3	80	0.4	1	>100	1.6	2.2	3	3	-55~110	3750

Photo Coupler | Photo Transistor | 8pin SOP-DC

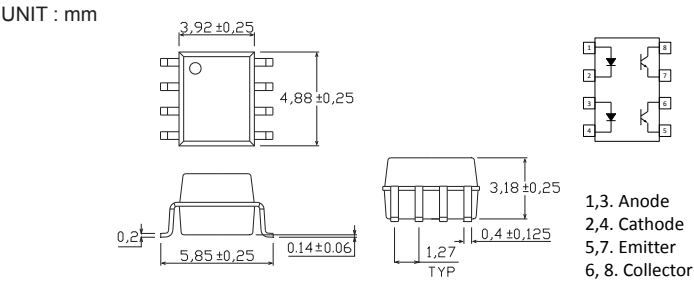
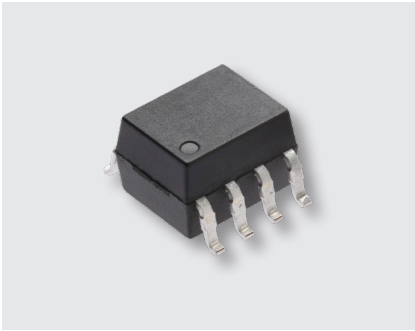


Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	t _r (μs)	t _f (μs)	t _{on} (μs)	t _{off} (μs)	T _{OPR} (°C)	Viso (Vrms)
ELD205	4.88x3.92x3.18	High Vceo, Dual channel	1.2	80	0.4	10	40~80	1.6	2.2	5	4	-55~110	3750
ELD206	4.88x3.92x3.18	High Vceo, Dual channel	1.2	80	0.4	10	63~125	1.6	2.2	5	4	-55~110	3750
ELD207	4.88x3.92x3.18	High Vceo, Dual channel	1.2	80	0.4	10	100~200	1.6	2.2	5	4	-55~110	3750
ELD211	4.88x3.92x3.18	High Vceo, Dual channel	1.2	80	0.4	10	>20	1.6	2.2	5	4	-55~110	3750
ELD213	4.88x3.92x3.18	High Vceo, Dual channel	1.2	80	0.4	10	>100	1.6	2.2	5	4	-55~110	3750
ELD217	4.88x3.92x3.18	High Vceo, Dual channel	1.2	80	0.4	1	>100	1.6	2.2	5	4	-55~110	3750

Photo Coupler | Photo Transistor | 4pin Long Creepage



UNIT : mm

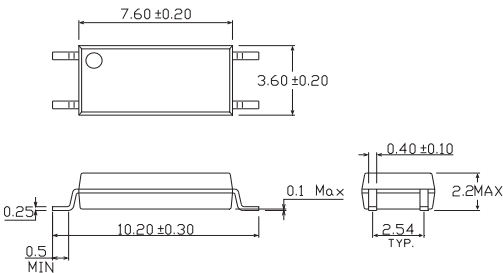


- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	tr (μs)	tf (μs)	ton (μs)	toff (μs)	T _{OPR} (°C)	Viso (Vrms)
EL1010-G	7.6x3.6x2.2	250<CTI<400	1.45	80	0.3	5	50~600	-	-	4	3	-55~110	5000
EL1012-G	7.6x3.6x2.2	250<CTI<400	1.45	80	0.3	10	63~125	-	-	4	3	-55~110	5000
EL1013-G	7.6x3.6x2.2	250<CTI<400	1.45	80	0.3	10	100~200	-	-	4	3	-55~110	5000
EL1014-G	7.6x3.6x2.2	250<CTI<400	1.45	80	0.3	10	160~320	-	-	4	3	-55~110	5000
EL1017-G	7.6x3.6x2.2	250<CTI<400	1.45	80	0.3	5	80~160	-	-	4	3	-55~110	5000
EL1018-G	7.6x3.6x2.2	250<CTI<400	1.45	80	0.3	5	130~260	-	-	4	3	-55~110	5000
EL1019-G	7.6x3.6x2.2	250<CTI<400	1.45	80	0.3	5	200~400	-	-	4	3	-55~110	5000
EL1010-TG	7.6x3.6x2.2	CTI>600	1.45	80	0.3	5	50~600	-	-	4	3	-55~110	5000
EL1012-TG	7.6x3.6x2.2	CTI>600	1.45	80	0.3	10	63~125	-	-	4	3	-55~110	5000
EL1013-TG	7.6x3.6x2.2	CTI>600	1.45	80	0.3	10	100~200	-	-	4	3	-55~110	5000
EL1014-TG	7.6x3.6x2.2	CTI>600	1.45	80	0.3	10	160~320	-	-	4	3	-55~110	5000
EL1017-TG	7.6x3.6x2.2	CTI>600	1.45	80	0.3	5	80~160	-	-	4	3	-55~110	5000
EL1018-TG	7.6x3.6x2.2	CTI>600	1.45	80	0.3	5	130~260	-	-	4	3	-55~110	5000
EL1019-TG	7.6x3.6x2.2	CTI>600	1.45	80	0.3	5	200~400	-	-	4	3	-55~110	5000
EL101L-G	7.6x3.6x2.2	Ultra Low Input Current :0.1mA	1.3	75	0.4	0.1	50~200	-	-	-	-	-55~110	5000
EL1010H-G	7.6x3.6x2.2	TOPR=125°C	1.2	80	0.3	5	50~600	-	-	12	10	-55~125	5000
EL101U-G	7.6x3.6x2.2	Low Input Current :0.5mA, TOPR=125°C	1.3	60	0.4	0.5	50~600	-	-	1	50	-40~125	5000
EV101U-G	7.6x3.6x2.2	Low Input Current :0.5mA, TOPR=125°C, AECQ101 Certified	1.3	60	0.4	0.5	50~600	-	-	1	50	-40~125	5000
ELC101-G	7.6x3.6x2.2	Low Input Current :0.5mA, TOPR=125°C, Flat I _F to CTR	1.3	80	0.3	0.5	50~600	6	8	-	-	-40~125	5000

Photo Coupler ■ Photo Transistor ■ 4pin Long Creepage



UNIT : mm

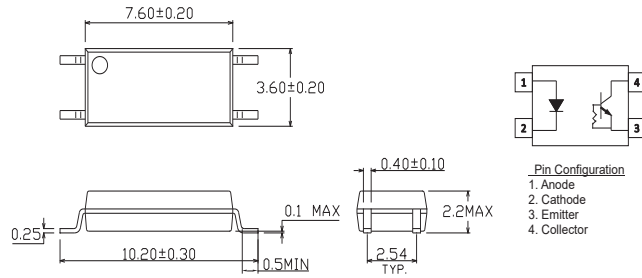


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
ELM2KL-G	7.6x3.6x2.2	TOPR=125°C, 20 Kbps Ton&Toff <30us@RL=10 KΩ	1.3	70	0.3	1	100~600	-	-	30 (max)	30 (max)	-40-125	3750

Photo Coupler ■ Photo Transistor ■ 5pin Long Creepage



UNIT : mm


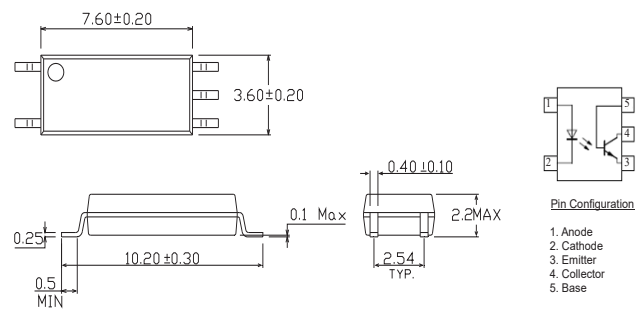


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
EL1110-G	7.6x3.6x2.2	250<CTI<400, with Base Pin Function	1.45	80	0.4	5	50~600	2	3	4	3	-55-110	5000
EL1112-G	7.6x3.6x2.2	250<CTI<400, with Base Pin Function	1.45	80	0.4	10	63~125	2	3	4	3	-55-110	5000
EL1113-G	7.6x3.6x2.2	250<CTI<400, with Base Pin Function	1.45	80	0.4	10	100~200	2	3	4	3	-55-110	5000
EL1114-G	7.6x3.6x2.2	250<CTI<400, with Base Pin Function	1.45	80	0.4	10	160~320	2	3	4	3	-55-110	5000
EL1116-G	7.6x3.6x2.2	250<CTI<400, with Base Pin Function	1.45	80	0.4	5	100~300	2	3	4	3	-55-110	5000
EL1117-G	7.6x3.6x2.2	250<CTI<400, with Base Pin Function	1.45	80	0.4	5	80~160	2	3	4	3	-55-110	5000
EL1118-G	7.6x3.6x2.2	250<CTI<400, with Base Pin Function	1.45	80	0.4	5	130~260	2	3	4	3	-55-110	5000
EL1119-G	7.6x3.6x2.2	250<CTI<400, with Base Pin Function	1.45	80	0.4	5	200~400	2	3	4	3	-55-110	5000

Photo Coupler | Photo Transistor | 4pin DIP-AC



UNIT : mm

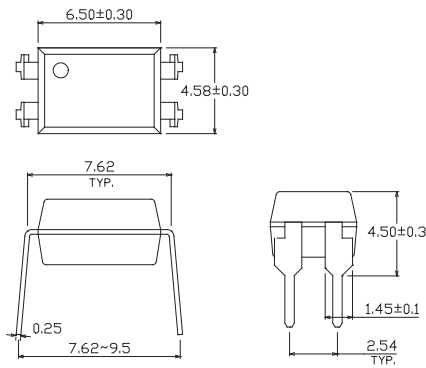



- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	tr (μs)	tf (μs)	ton (μs)	toff (μs)	T _{OPR} (°C)	Viso (Vrms)
EL814-G	6.5x4.58x3.5	High Vceo	1.2	80	0.2	1	20~300	-	-	-	-	-55~110	5000

Photo Coupler | Photo Transistor | 4pin DIP-DC



UNIT : mm

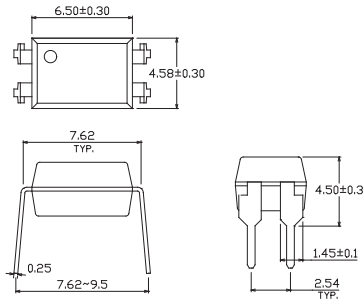


- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	tr (μs)	tf (μs)	ton (μs)	toff (μs)	T _{OPR} (°C)	Viso (Vrms)
EL816-G	6.5x4.58x3.5	High Vceo	1.2	80	0.2	5	50~600	6	8	-	-	-55~110	5000
EL817-G	6.5x4.58x3.5	High Vceo	1.2	80	0.2	5	50~600	6	8	-	-	-55~110	5000
EL851-G	6.5x4.58x3.5	High VCEO : 350V	1.2	350	0.4	5	50~600	4	5	-	-	-55~100	5000
EL817L-G	6.5x4.58x3.5	Ultra Low Input Current :0.1mA	1.3	75	0.4	0.1	50~200	-	-	-	-	-55~100	5000
EL817H-G	6.5x4.58x3.5	TOPR=125°C	1.2	80	0.35	5	50~600	6	8	-	-	-55~100	5000
ELC816-G	6.5x4.58x3.5	Low Input Current :0.5mA, TOPR=125°C, Flat IF to CTR	1.3	80	0.4	0.5	50~600	6	8	-	-	-55~125	5000

Photo Coupler ■ Photo Transistor ■ 4pin DIP-DC



UNIT : mm

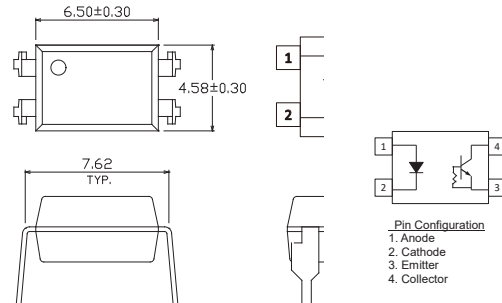


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
EL2K-G	6.5x4.58x3.5	$TOPR=125^{\circ}C$, 20 Kbps $Ton\&Toff < 30\mu s @ RL=10\ K\Omega$	1.3	70	0.3	1	100~600	-	-	-	-	-40~125	3750

Photo Coupler ■ Photo Transistor ■ 6pin DIP-AC



UNIT : mm


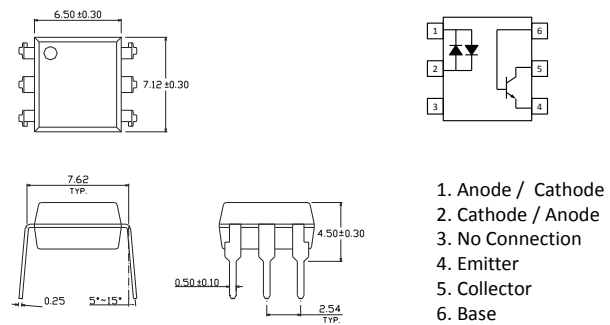


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
H11AA1	7.12x6.5x3.5	High V_{ceo} , with Base Pin Function	1.2	80	0.4	10	>20	10	10	10	10	-55~100	5000
H11AA2	7.12x6.5x3.5	High V_{ceo} , with Base Pin Function	1.2	80	0.4	10	>10	10	10	10	10	-55~100	5000
H11AA3	7.12x6.5x3.5	High V_{ceo} , with Base Pin Function	1.2	80	0.4	10	>50	10	10	10	10	-55~100	5000
H11AA4	7.12x6.5x3.5	High V_{ceo} , with Base Pin Function	1.2	80	0.4	10	>100	10	10	10	10	-55~100	5000

Photo Coupler | Photo Transistor | 6pin DIP-DC



UNIT : mm




- 1. Anode
- 2. Cathode
- 3. No Connection
- 4. Emitter
- 5. Collector
- 6. Base

Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	tr (μs)	tf (μs)	ton (μs)	toff (μs)	T _{OPR} (°C)	Viso (Vrms)
4N25	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.5	10	>20	-	-	3	3	-55~110	5000
4N26	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.5	10	>20	-	-	3	3	-55~110	5000
4N27	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.5	10	>10	-	-	3	3	-55~110	5000
4N28	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.5	10	>10	-	-	3	3	-55~110	5000
4N35	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.3	10	>100	-	-	10	9	-55~110	5000
4N36	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.3	10	>100	-	-	10	9	-55~110	5000
4N37	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.3	10	>100	-	-	10	9	-55~110	5000
4N38	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	1	10	>20	-	-	10	9	-55~110	5000
H11A1	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.4	10	>50	-	-	3	3	-55~110	5000
H11A2	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.4	10	>20	-	-	3	3	-55~110	5000
H11A3	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.4	10	>20	-	-	3	3	-55~110	5000
H11A4	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.4	10	>10	-	-	3	3	-55~110	5000
H11A5	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.2	80	0.4	10	>30	-	-	3	3	-55~110	5000
CNY17-1	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.65	80	0.3	10	40~80	6	8	10	9	-55~110	5000
CNY17-2	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.65	80	0.3	10	63~125	6	8	10	9	-55~110	5000
CNY17-3	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.65	80	0.3	10	100~200	6	8	10	9	-55~110	5000
CNY17-4	7.12x6.5x3.5	High Vceo, with Base Pin Function	1.65	80	0.3	10	160~320	6	8	10	9	-55~110	5000
CNY17F-1	7.12x6.5x3.5	High Vceo, without Base Pin Function	1.65	80	0.3	10	40~80	6	8	10	9	-55~110	5000
CNY17F-2	7.12x6.5x3.5	High Vceo, without Base Pin Function	1.65	80	0.3	10	63~125	6	8	10	9	-55~110	5000
CNY17F-3	7.12x6.5x3.5	High Vceo, without Base Pin Function	1.65	80	0.3	10	100~200	6	8	10	9	-55~110	5000
CNY17F-4	7.12x6.5x3.5	High Vceo, without Base Pin Function	1.65	80	0.3	10	160~320	6	8	10	9	-55~110	5000

Photo Coupler ■ Photo Transistor ■ 8pin DIP-DC



UNIT : mm

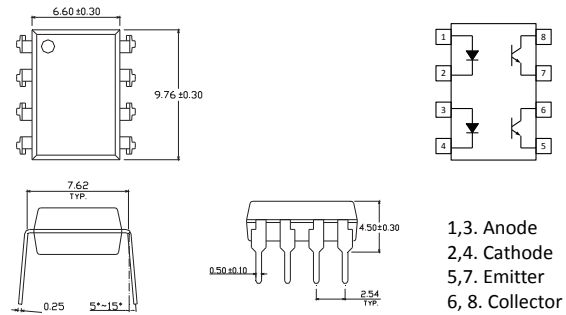


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
EL827	9.76x6.6x3.5	High Vceo, Dual channel	1.2	80	0.2	5	50~600	3	4	-	-	-55~110	5000

Photo Coupler ■ Photo Transistor ■ 16pin DIP-DC



UNIT : mm

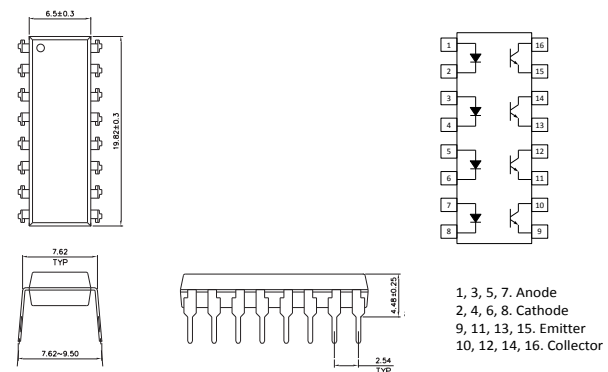


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
EL847	19.82x6.5x3.5	4CH, High Vceo	1.2	80	0.2	5	50~600	6	8	-	-	-55~110	5000


Photo Coupler | Photo Transistor | 4Pin High Isolation




UNIT : mm

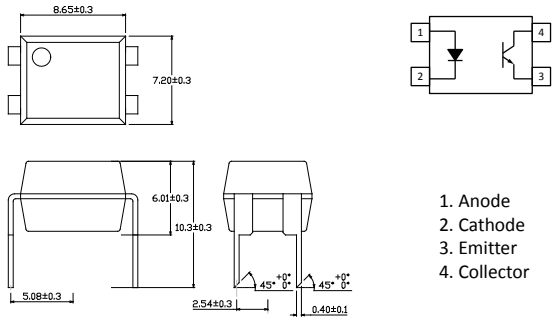

Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
CNY64	8.65x7.2x6.01	Viso=8KV, Creepage Distance > 10mm	1.6	80	0.3	5	50~300	3	5	6	7	-55-85	8200

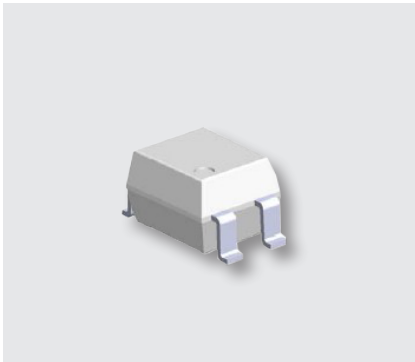


UNIT : mm

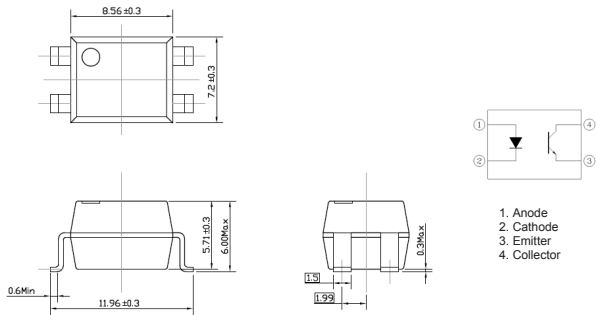

Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
CNY64S	8.56x7.2x6.01	Viso=8KV, Creepage Distance > 10mm	1.6	80	0.3	5	50~300	3	5	6	7	-55-85	8200




UNIT : mm

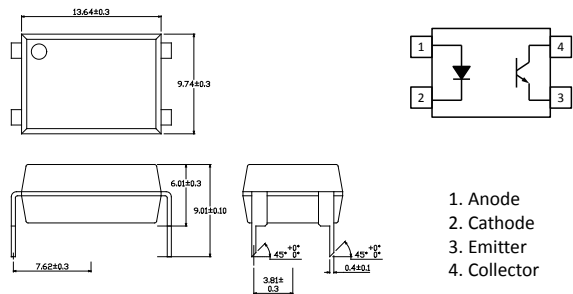


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
CNY65	13.64x9.74x6.01	Viso=8KV, Creepage Distance > 15mm	1.6	80	0.3	5	50~300	3	5	6	7	-55-85	8200

Photo Coupler | Photo Transistor | 16pin SSOP-DC

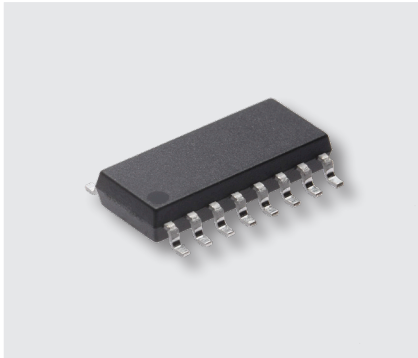

UNIT : mm

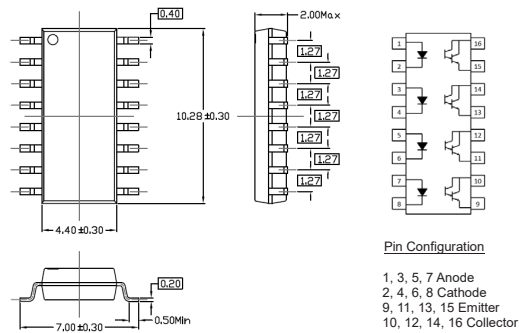


Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
ELQ3H5-G	10.28x4.4x2	4 CH, Darlington High CTR with small package	1.1	40	1	1	200~7500	80	75	-	-	-55-100	3750

Photo Coupler | Photo Darlington | 4pin SSOP-DC



UNIT : mm

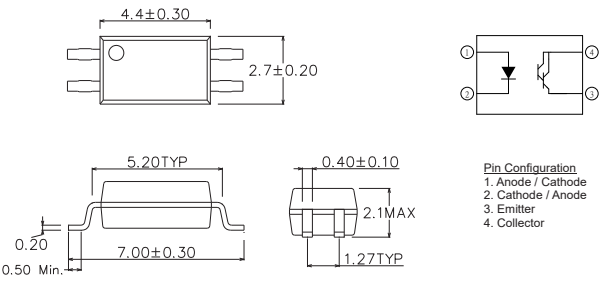



Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
EL3H5-G	4.4x2.7x2.1	Darlington High CTR with small package	1.1	40	1	1	200~7500	80	75	-	-	-55-100	3750

Photo Coupler

Photo Coupler ■ Photo Darlington ■ 4Pin DIP-DC





UNIT : mm

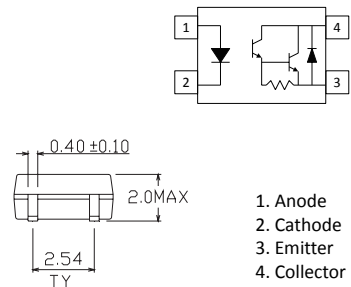

Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
EL452-G	4.4x4.1x2	Darlington High CTR with small package	1.2	350	1.5	1	>1000	80	10	-	-	-55-110	3750



UNIT : mm







Product	Dimension (mm)	Feature	V_F (V)	BV_{CEO} (Min) (V)	$V_{CE(SAT)}$ (Max) (V)	I_F (mA)	CTR (%)	t_r (μs)	t_f (μs)	t_{on} (μs)	t_{off} (μs)	T_{OPR} (°C)	Viso (Vrms)
EL815-G	6.5x4.58x3.5	Darlington High CTR	1.2	35	1	1	600~7500	60	53	-	-	-55-110	5000
EL852-G	6.5x4.58x3.5	Darlington High CTR, High VCEO:350V	1.2	350	1.2	1	1000~15000	300	100	-	-	-55-100	5000

Photo Coupler ■ Photo Darlington ■ 6Pin DIP-DC



UNIT : mm







1. Anode
2. Cathode
3. No Connection
4. Emitter
5. Collector
6. Base

Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	t _r (μs)	t _f (μs)	t _{on} (μs)	t _{off} (μs)	T _{OPR} (°C)	Viso (Vrms)
4N29	7.12x6.5x3.5	Darlington High CTR	1.2	55	1	10	>100	-	-	5	40	-55-100	5000
4N30	7.12x6.5x3.5	Darlington High CTR	1.2	55	1	10	>100	-	-	5	40	-55-100	5000
4N31	7.12x6.5x3.5	Darlington High CTR	1.2	55	1.2	10	>50	-	-	5	40	-55-100	5000
4N32	7.12x6.5x3.5	Darlington High CTR	1.2	55	1	10	>500	-	-	5	100	-55-100	5000
4N33	7.12x6.5x3.5	Darlington High CTR	1.2	55	1	10	>500	-	-	5	100	-55-100	5000
H11B1	7.12x6.5x3.5	Darlington High CTR	1.2	55	1	1	>500	-	-	25	18	-55-100	5000
H11B2	7.12x6.5x3.5	Darlington High CTR	1.2	55	1	1	>200	-	-	25	18	-55-100	5000
H11B3	7.12x6.5x3.5	Darlington High CTR	1.2	55	1	1	>100	-	-	25	18	-55-100	5000
TIL113	7.12x6.5x3.5	Darlington High CTR	1.2	55	1.2	10	>300	-	-	5	100	-55-100	5000

Photo Coupler ■ Photo Darlington ■ 8Pin DIP-DC




UNIT : mm






- 1, 3. Anode
- 2, 4. Cathode
- 5, 7. Emitter
- 6, 8. Collector

Product	Dimension (mm)	Feature	V _F (V)	BV _{CEO} (Min) (V)	V _{CE(SAT)} (Max) (V)	I _F (mA)	CTR (%)	t _r (μs)	t _f (μs)	t _{on} (μs)	t _{off} (μs)	T _{OPR} (°C)	Viso (Vrms)
EL825	9.76x6.6x3.5	Darlington High CTR, Dual CH	1.2	40	1	1	600~7500	60	53	-	-	-55-110	5000

Photo Coupler | Schmitt Trigger | 6Pin DIP-DC

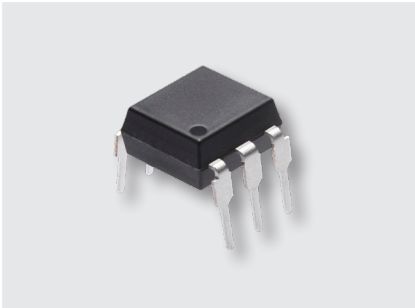

UNIT : mm






- 1. Anode
- 2. Cathode
- 3. No Connection
- 4. V_O
- 5. GND
- 6. V_{CC}

Product	Dimension(mm)	Feature	Supply Voltage (V)	I_{FT} (mA)	t_{ON} (ns)	t_{OFF} (ns)	T_{OPR} (°C)	Viso (Vrms)
H11L1	7.12x6.5x3.5	1M bps H to L, Schmitt trigger	3-15	1.6	4	4	-55-100	5000
H11L2	7.12x6.5x3.5	1M bps H to L, Schmitt trigger	3-15	10	4	4	-55-100	5000
H11L3	7.12x6.5x3.5	1M bps H to L, Schmitt trigger	3-15	5	4	4	-55-100	5000

Photo Coupler | High Speed | 5Pin SOP-DC



UNIT : mm

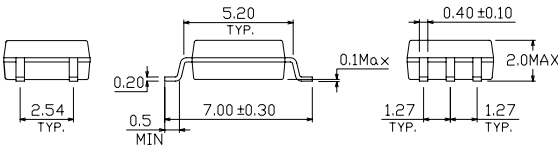


- 1: Anode
- 3: Cathode
- 4: GND
- 5: V_{out}
- 6: V_{CC}

Product	Dimension (mm)	Feature	Supply Voltage (V)	I_{FT} (mA)	CTR (%)	t_{PHL} (ns)	t_{PLH} (ns)	CMR (V/us)	T_{OPR} (°C)	Viso (Vrms)
ELM452	4.4x4.1x2	1M bps H to L, Open-Collector Output, CTR type	30	-	>15	800	800	5000	-40-85	3750
ELM453	4.4x4.1x2	1M bps H to L, Open-Collector Output, CTR type	30	-	>15	800	800	15000	-40-85	3750
ELM453H	4.4x4.1x2	1M bps H to L, Open-Collector Output, CTR type, High TOPR	30	-	>25	1000	1000	1000	-40-125	3750
ELM456	4.4x4.1x2	1M bps H to L, IPM driver, Open-Collector Output, Threshold type	30	5	-	400	600	10000	-40-100	3750
ELM600	4.4x4.1x2	10M bps H to L, Open-Collector Output, Threshold type	7	5	-	100	100	-	-40-85	3750
ELM601	4.4x4.1x2	10M bps H to L, Open-Collector Output, Threshold type	7	5	-	100	100	5000	-40-85	3750
ELM611	4.4x4.1x2	10M bps H to L, Open-Collector Output, Threshold type	7	5	-	100	100	20000	-40-85	3750
ELM611H	4.4x4.1x2	10M bps H to L, Open-Collector Output, Threshold type, High TOPR	7	5	-	100	100	15000	-40-125	3750

Photo Coupler ■ High Speed ■ 5Pin SOP



UNIT : mm

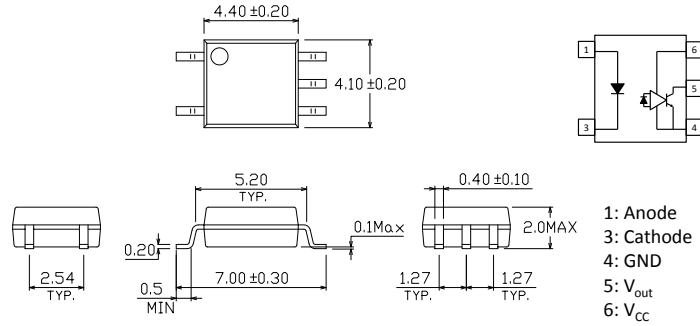


Product	Dimension (mm)	Feature	Supply Voltage (V)	I_{FT} (mA)	tPHL (ns)	tPLH (ns)	CMR (V/us)	T_{OPR} (°C)	Viso (Vrms)
ELM680	4.4x4.1x2	1M bps H to H, IPM driver, Totem Pole Output, Threshold type, DC input	30	5	400	400	10000	-40-85	3750
ELM684	4.4x4.1x2	1M bps H to H, IPM driver, Totem Pole Output, Threshold type, AC input	30	5	400	400	10000	-40-85	3750
ELM61A	4.4x4.1x2	10M bps H to H, Totem Pole Output, Threshold type, Low IFT	7	1.6	80	80	15000	-40-105	3750
ELM81L	4.4x4.1x2	15M bps H to L, Totem Pole Output, Threshold type	7	5	60	60	10000	-40-85	3750

Photo Coupler ■ High Speed ■ 8Pin SOP-DC



UNIT : mm

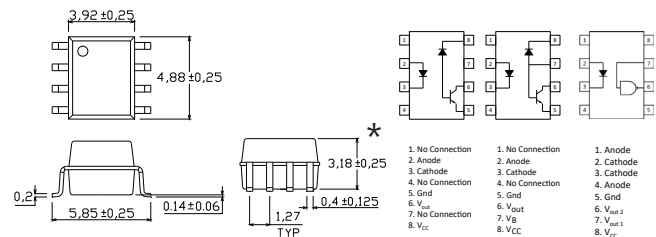


Product	Dimension (mm)	Feature	Supply Voltage (V)	I_{FT} (mA)	CTR (%)	tPHL (ns)	tPLH (ns)	CMR (V/us)	T_{OPR} (°C)	Viso (Vrms)
*EL0452	4.88x3.92x3.18	1M bps H to L, Open-Collector Output, CTR type	30	-	19~50	800	800	-	-55-100	3750
*EL0453	4.88x3.92x3.18	1M bps H to L, Open-Collector Output, CTR type	30	-	19~50	800	800	15000	-55-100	3750
EL0500	4.88x3.92x3.18	1M bps H to L, Open-Collector Output, CTR type	30	-	7~50	1500	1500	-	-55-100	3750
EL0501	4.88x3.92x3.18	1M bps H to L, Open-Collector Output, CTR type	30	-	19~50	800	800	-	-55-100	3750
EL0600	4.88x3.92x3.18	10M bps H to L, Open-Collector Output, Threshold type	7	5	-	75	75	-	-40-100	3750
EL0601	4.88x3.92x3.18	10M bps H to L, Open-Collector Output, Threshold type	7	5	-	75	75	5000	-40-100	3750
EL0611	4.88x3.92x3.18	10M bps H to L, Open-Collector Output, Threshold type	7	5	-	75	75	10000	-40-100	3750

Star mark * : Please refer to the schematic of Pin configuration with " ★ " mark

Photo Coupler | High Speed | 8pin SOP-DC




UNIT : mm

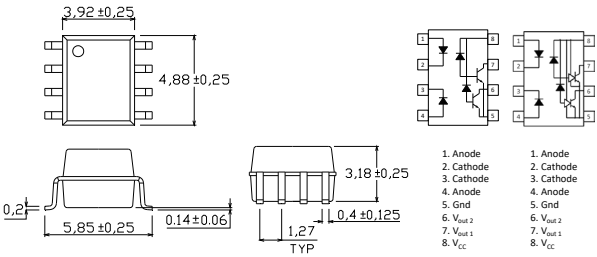


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	CTR (%)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
**EL0530	4.88x3.92x3.18	1M bps H to L, Dual CH, Open-Collector Output, CTR type	30	-	7~50	1500	1500	1000	-55-100	3750
**EL0531	4.88x3.92x3.18	1M bps H to L, Dual CH, Open-Collector Output, CTR type	30	-	19~50	800	800	1000	-55-100	3750
**EL0631	4.88x3.92x3.18	10M bps H to L, Dual CH, Open-Collector Output, Threshold type	7	5	-	100	100	10000	-40-100	3750


Star mark * : Please refer to the schematic of Pin configuration with " * " " * * " mark

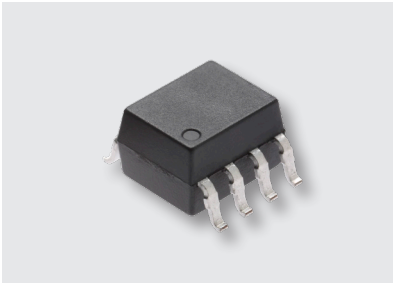


UNIT : mm

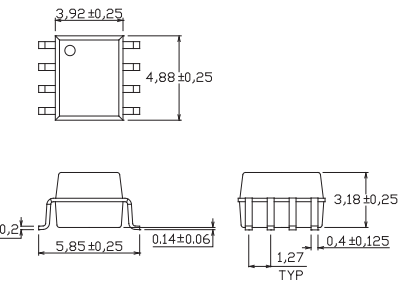

Product	Dimension (mm)	Feature	Supply Voltage (V)	CTR (%)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
EL0700	4.88x3.92x3.18	100K bps H to L, Darlington Open-Collector Output, CTR type	7	300(min)	10000	35000	1000	-40-85	3750
EL0701	4.88x3.92x3.18	100K bps H to L, Darlington Open-Collector Output, CTR type	18	500(min)	25000	60000	1000	-40-85	3750

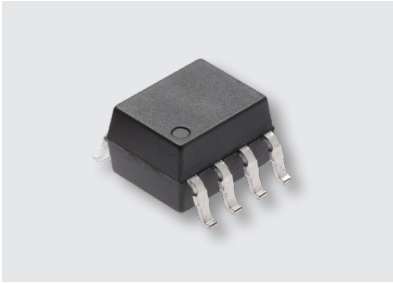


UNIT : mm

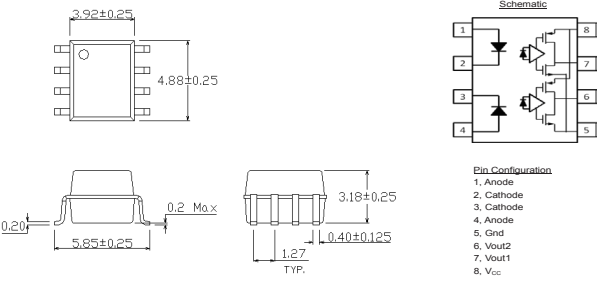


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
EL083L	4.88x3.92x3.18	15M bps H to L, Dual CH, Totem Pole Output, Threshold type	7	5	60	60	10000	-40-85	3750

Photo Coupler ■ High Speed ■ 8pin DIP-DC

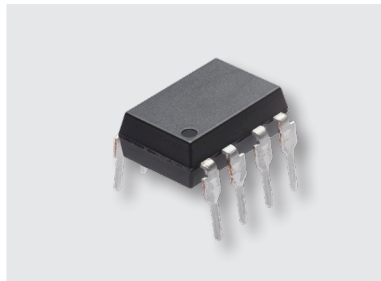

UNIT : mm

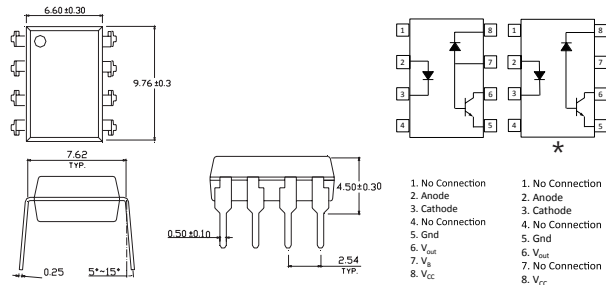


Product	Dimension (mm)	Feature	Supply Voltage (V)	CTR (%)	tPHL (ns)	tPLH (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
6N135	9.76x6.6x3.5	1M bps H to L, Open-Collector Output, CTR type	30	7~50	1500	1500	1000	-55-100	5000
6N136	9.76x6.6x3.5	1M bps H to L, Open-Collector Output, CTR type	30	19~50	800	800	1000	-55-100	5000
*EL4502	9.76x6.6x3.5	1M bps H to L, Open-Collector Output, CTR type	30	19~50	800	800	1000	-55-100	5000
*EL4503	9.76x6.6x3.5	1M bps H to L, Open-Collector Output, CTR type	30	19~50	800	800	15000	-55-100	5000
*EL4504	9.76x6.6x3.5	1M bps H to L, Open-Collector Output, CTR type	30	>21	800	800	15000	-55-100	5000

Star mark * : Please refer to the schematic of Pin configuration with " * " " * * " * * " mark




UNIT : mm

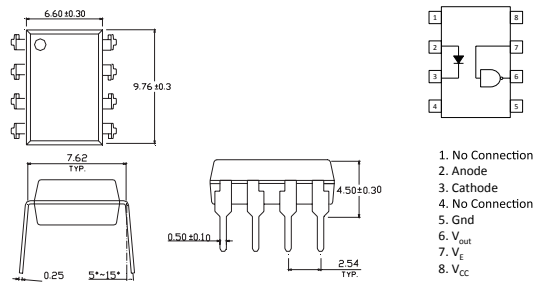


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	tPHL (ns)	tPLH (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
6N137	9.76x6.6x3.5	10M bps H to L, Open-Collector Output, Threshold type	7	5	75	75	-	-40-85	5000
EL2601	9.76x6.6x3.5	10M bps H to L, Open-Collector Output, Threshold type	7	5	75	75	5000	-40-85	5000
EL2611	9.76x6.6x3.5	10M bps H to L, Open-Collector Output, Threshold type	7	5	75	75	10000	-40-85	5000

Photo Coupler ■ High Speed ■ 8pin DIP-DC

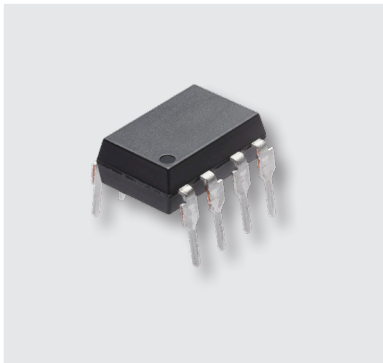

UNIT : mm

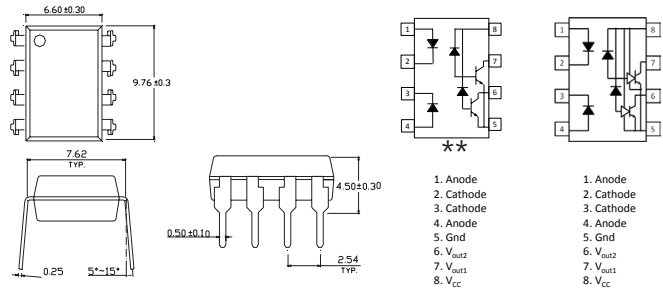


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	CTR (%)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
**EL2530	9.76x6.6x3.5	1M bps H to L, Dual CH, Open-Collector Output, CTR type	30	-	7~50	1500	1500	1000	-40~100	5000
**EL2531	9.76x6.6x3.5	1M bps H to L, Dual CH, Open-Collector Output, CTR type	30	-	19~50	800	800	1000	-40~100	5000
EL2630	9.76x6.6x3.5	10M bps H to L, Dual CH, Open-Collector Output, Threshold type	7	5	-	100	100	5000	-40~100	5000
EL2631	9.76x6.6x3.5	10M bps H to L, Dual CH, Open-Collector Output, Threshold type	7	5	-	100	100	10000	-40~100	5000

Star mark * : Please refer to the schematic of Pin configuration with " * " " ** " mark

Photo Coupler




UNIT : mm

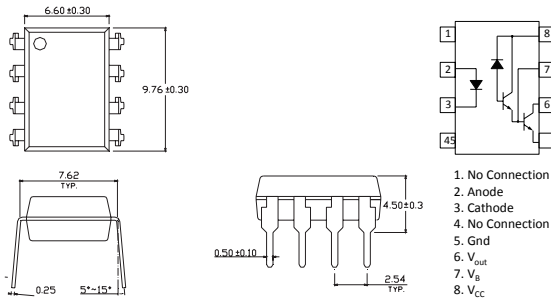


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	CTR (%)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
6N138	9.76x6.6x3.5	100K bps H to L, Darlington Open-Collector Output, CTR type	7	-	300(min)	10000	35000	1000	-40~85	5000
6N139	9.76x6.6x3.5	100K bps H to L, Darlington Open-Collector Output, CTR type	18	-	500(min)	25000	60000	1000	-40~85	5000

Photo Coupler ■ High Speed ■ 8pin DIP-DC

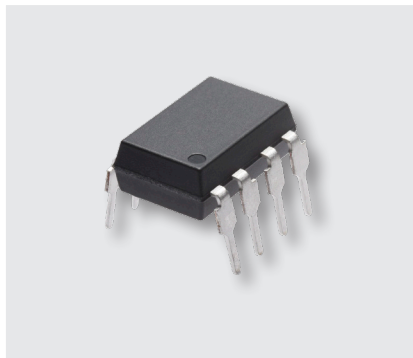


UNIT : mm

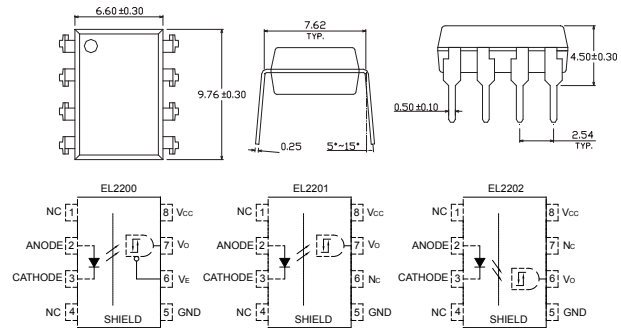


Product	Dimension (mm)	Feature	Supply Voltage (V)	I_{FT} (mA)	tPHL (ns)	tPLH (ns)	CMR (V/us)	T_{OPR} (°C)	Viso (Vrms)
EL2200	9.76x6.6x3.5	5M bps H to H, IPM driver, Totem Pole Output, Threshold type	20	1.6	300	300	1000	-40-85	5000
EL2201	9.76x6.6x3.5	5M bps H to H, IPM driver, Totem Pole Output, Threshold type	20	1.6	300	300	1000	-40-85	5000
EL2202	9.76x6.6x3.5	5M bps H to H, IPM driver, Totem Pole Output, Threshold type	20	1.6	300	300	1000	-40-85	5000

Photo Coupler ■ High Speed ■ 8Pin Wide Body DIP-DC

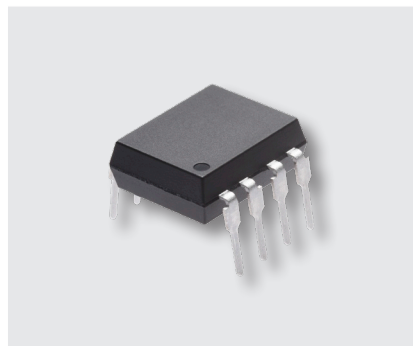


UNIT : mm

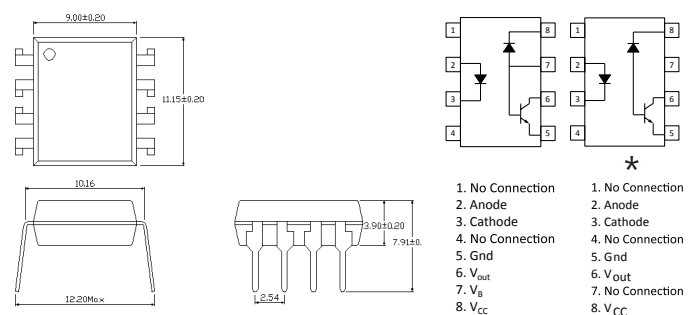


Product	Dimension (mm)	Feature	Supply Voltage (V)	CTR (%)	tPHL (ns)	tPLH (ns)	CMR (V/us)	T_{OPR} (°C)	Viso (Vrms)
ELW135	11.15x9x3.9	1M bps H to L, Open-Collector Output, CTR type, 400mil widy body	30	7~50	1500	1500	1000	-55-100	5000
ELW136	11.15x9x3.9	1M bps H to L, Open-Collector Output, CTR type, 400mil widy body	30	19~50	800	800	1000	-55-100	5000
*ELW4503	11.15x9x3.9	1M bps H to L, Open-Collector Output, CTR type, 400mil widy body	30	19~50	800	800	15000	-55-100	5000

Star mark * : Please refer to the schematic of Pin configuration with " * " " ** " mark


Photo Coupler ■ High Speed ■ 8Pin Wide Body DIP-DC

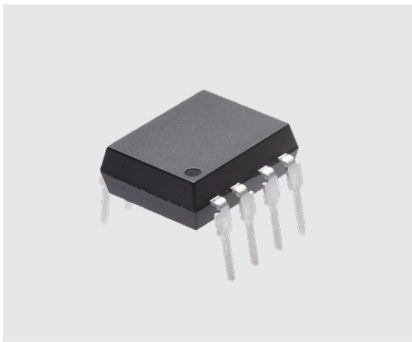


UNIT : mm

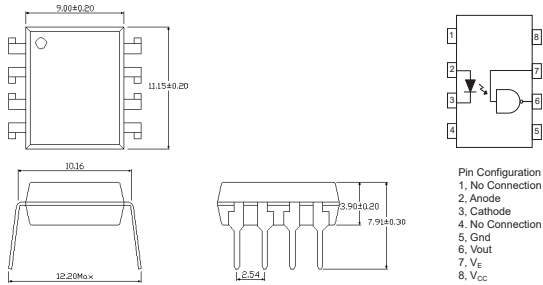

Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	CTR (%)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
ELW137	11.15x9x3.9	10M bps H to L, Open-Collector Output, Threshold type, 400mil widy body	7	5	-	100	100	-	-40-85	5000
ELW2601	11.15x9x3.9	10M bps H to L, Open-Collector Output, Threshold type, 400mil widy body	7	5	-	100	100	5000	-40-85	5000
ELW2611	11.15x9x3.9	10M bps H to L, Open-Collector Output, Threshold type, 400mil widy body	7	5	-	100	100	10000	-40-85	5000

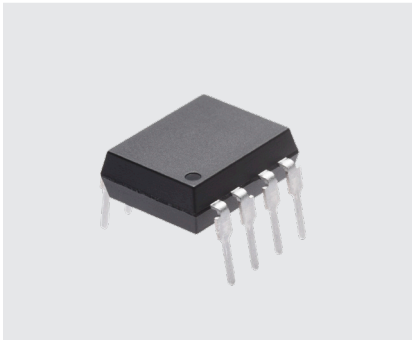

UNIT : mm

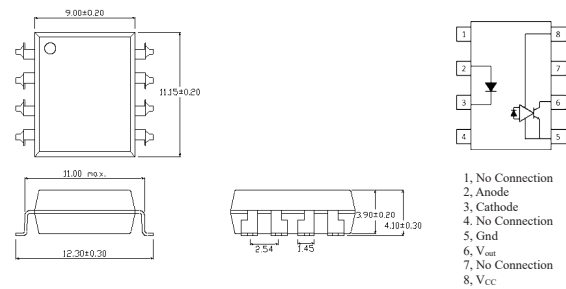


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
ELW4506	11.15x9x3.9	1M bps H to L, IPM driver, Open-Collector Output, Threshold type, 400mil widy body	30	5	400	600	10000	-40-100	5000

Photo Coupler ■ High Speed ■ 6Pin SDIP-DC




UNIT : mm

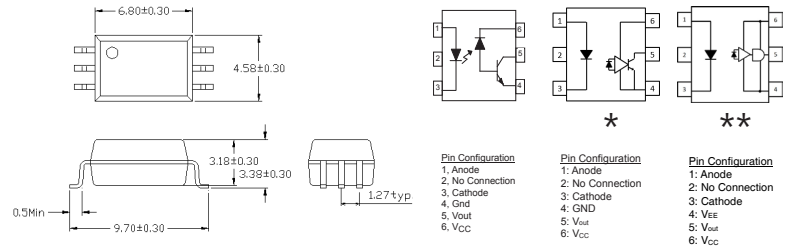


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	CTR (%)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
ELS511	6.8x4.58x3.18	1M bps H to L, Open-Collector Output, CTR type	30	-	20(min)	1500	1500	5000	-40-85	5000
*ELS611	6.8x4.58x3.18	10M bps H to L, Open-Collector Output, Threshold type	7	5	-	100	100	5000	-40-85	5000
ELS456	6.8x4.58x3.18	1M bps H to L, IPM driver, Open-Collector Output, Threshold type	30	5	-	400	600	10000	-40-100	5000

Star mark * : Please refer to the schematic of Pin configuration with " * " " * * " mark

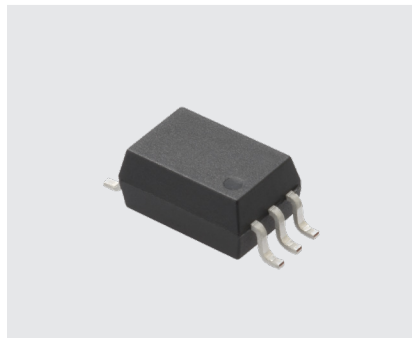

UNIT : mm

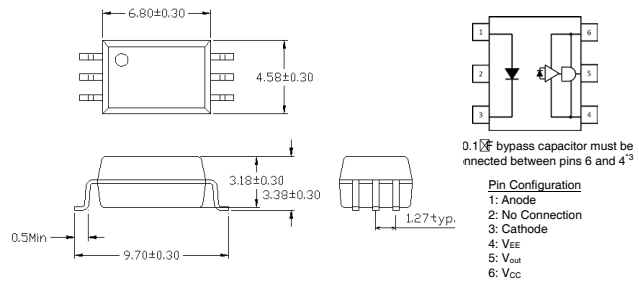


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
ELS680	6.8x4.58x3.18	1M bps H to H, IPM driver, Totem Pole Output, Threshold type	30	5	350	350	10000	-40-100	5000

Photo Coupler ■ High Speed ■ 6Pin LSOP




UNIT : mm

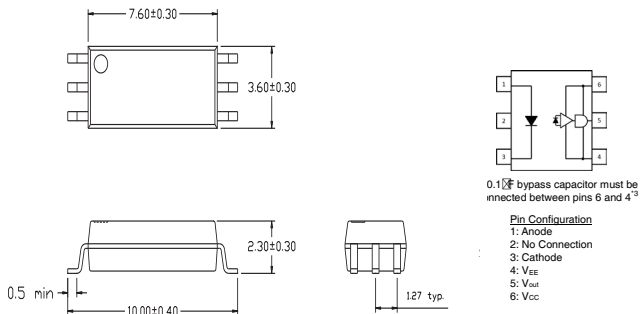

Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
EL6880	7.6x3.6x2.3	10M bps H to H, IPM driver, Totem Pole Output, Threshold type	30	1.6	120	120	10000	-40-100	5000



UNIT : mm

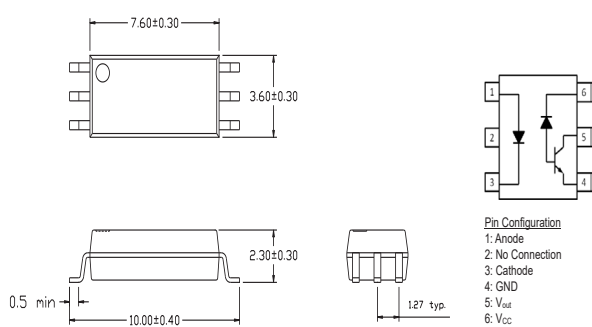


Product	Dimension (mm)	Feature	Supply Voltage (V)	CTR (%)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
EL2751	7.6x3.6x2.3	1M bps H to L, Open-Collector Output, CTR type	30	20(min)	1500	1500	5000	-40-100	5000

Photo Coupler ■ High Speed ■ 8Pin 15mm LLSOP-DC



UNIT : mm


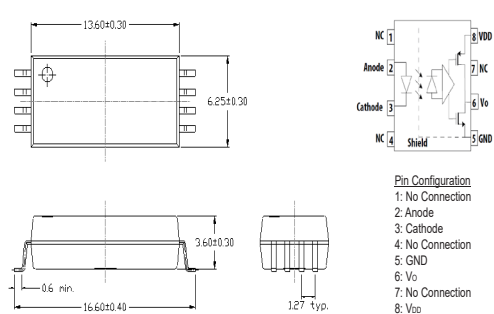


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	t _{PHL} (ns)	t _{PLH} (ns)	CMR (V/us)	T _{OPR} (°C)	Viso (Vrms)
ELH61A	13.6x6.25x3.6	10M bps H to H, Totem Pole Output, Threshold type, 15mm Creepage, CTI>600	7	3.8	100	100	20000	-40-100	7500

Photo Coupler | Triac Driver | 4Pin DIP-DC




UNIT : mm





Product	Dimension (mm)	Feature	V_F (V)	V_{DRM} (Max) (V)	V_{TM} (V)	V_{INH} (V)	$I_{T\ rms}$ (mA)	I_{FT} (mA)	T_{OPR} (°C)	Viso (Vrms)
ELT3041	6.5x4.58x3.5	400V VDRM Zero-cross	1.5	400	3	20	70	15	-55-100	5000
ELT3042	6.5x4.58x3.5	400V VDRM Zero-cross	1.5	400	3	20	70	10	-55-100	5000
ELT3043	6.5x4.58x3.5	400V VDRM Zero-cross	1.5	400	3	20	70	5	-55-100	5000
ELT3061	6.5x4.58x3.5	600V VDRM Zero-cross	1.5	600	3	20	70	15	-55-100	5000
ELT3062	6.5x4.58x3.5	600V VDRM Zero-cross	1.5	600	3	20	70	10	-55-100	5000
ELT3063	6.5x4.58x3.5	600V VDRM Zero-cross	1.5	600	3	20	70	5	-55-100	5000
ELT3081	6.5x4.58x3.5	800V VDRM Zero-cross	1.5	800	3	20	70	15	-55-100	5000
ELT3082	6.5x4.58x3.5	800V VDRM Zero-cross	1.5	800	3	20	70	10	-55-100	5000
ELT3083	6.5x4.58x3.5	800V VDRM Zero-cross	1.5	800	3	20	70	5	-55-100	5000
*ELT3021	6.5x4.58x3.5	400V VDRM Random Phase	1.5	400	2.5	-	70	15	-55-100	5000
*ELT3022	6.5x4.58x3.5	400V VDRM Random Phase	1.5	400	2.5	-	70	10	-55-100	5000
*ELT3023	6.5x4.58x3.5	400V VDRM Random Phase	1.5	400	2.5	-	70	5	-55-100	5000
*ELT3051	6.5x4.58x3.5	600V VDRM Random Phase	1.5	600	2.5	-	70	15	-55-100	5000
*ELT3052	6.5x4.58x3.5	600V VDRM Random Phase	1.5	600	2.5	-	70	10	-55-100	5000
*ELT3053	6.5x4.58x3.5	600V VDRM Random Phase	1.5	600	2.5	-	70	5	-55-100	5000

Star mark * : Please refer to the schematic of Pin configuration with " * " mark

Photo Coupler | Triac Driver | 5Pin DIP-DC

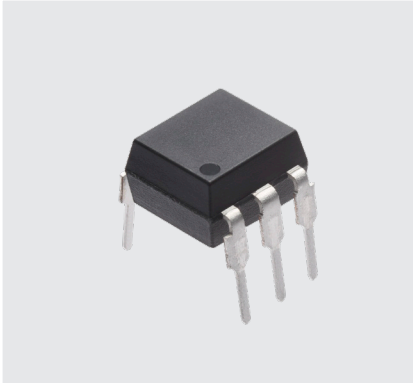

UNIT : mm

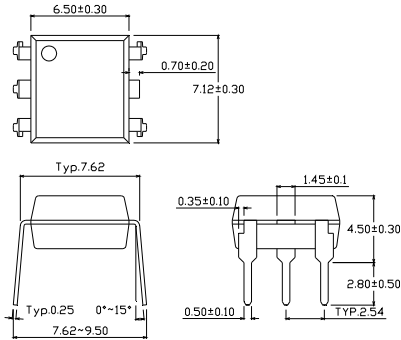

- 1. Anode
- 2. Cathode
- 3. No Connection
- 4. Terminal
- 5. Pin Cut
- 6. Terminal

Photo Coupler





Product	Dimension (mm)	Feature	V _F (V)	V _{DRM} (Max) (V)	V _{TM} (V)	V _{INH} (V)	I _{T rms} (mA)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
EL3031(P5)	7.12x6.5x3.5	250V VDRM Zero-cross	1.5	250	3	20	100	15	-55-100	5000
EL3032(P5)	7.12x6.5x3.5	250V VDRM Zero-cross	1.5	250	3	20	100	10	-55-100	5000
EL3033(P5)	7.12x6.5x3.5	250V VDRM Zero-cross	1.5	250	3	20	100	5	-55-100	5000
EL3041(P5)	7.12x6.5x3.5	400V VDRM Zero-cross	1.5	400	3	20	100	15	-55-100	5000
EL3042(P5)	7.12x6.5x3.5	400V VDRM Zero-cross	1.5	400	3	20	100	10	-55-100	5000
EL3043(P5)	7.12x6.5x3.5	400V VDRM Zero-cross	1.5	400	3	20	100	5	-55-100	5000
EL3061(P5)	7.12x6.5x3.5	600V VDRM Zero-cross	1.5	600	3	20	100	15	-55-100	5000
EL3062(P5)	7.12x6.5x3.5	600V VDRM Zero-cross	1.5	600	3	20	100	10	-55-100	5000
EL3063(P5)	7.12x6.5x3.5	600V VDRM Zero-cross	1.5	600	3	20	100	5	-55-100	5000
EL3081(P5)	7.12x6.5x3.5	800V VDRM Zero-cross	1.5	800	3	20	100	15	-55-100	5000
EL3082(P5)	7.12x6.5x3.5	800V VDRM Zero-cross	1.5	800	3	20	100	10	-55-100	5000
EL3083(P5)	7.12x6.5x3.5	800V VDRM Zero-cross	1.5	800	3	20	100	5	-55-100	5000
*EL3010(P5)	7.12x6.5x3.5	250V VDRM Random Phase	1.5	250	2.5	-	100	15	-55-100	5000
*EL3011(P5)	7.12x6.5x3.5	250V VDRM Random Phase	1.5	250	2.5	-	100	10	-55-100	5000
*EL3012(P5)	7.12x6.5x3.5	250V VDRM Random Phase	1.5	250	2.5	-	100	5	-55-100	5000
*EL3021(P5)	7.12x6.5x3.5	400V VDRM Random Phase	1.5	400	2.5	-	100	15	-55-100	5000
*EL3022(P5)	7.12x6.5x3.5	400V VDRM Random Phase	1.5	400	2.5	-	100	10	-55-100	5000
*EL3023(P5)	7.12x6.5x3.5	400V VDRM Random Phase	1.5	400	2.5	-	100	5	-55-100	5000
*EL3051(P5)	7.12x6.5x3.5	600V VDRM Random Phase	1.5	600	2.5	-	100	15	-55-100	5000
*EL3052(P5)	7.12x6.5x3.5	600V VDRM Random Phase	1.5	600	2.5	-	100	10	-55-100	5000
*EL3053(P5)	7.12x6.5x3.5	600V VDRM Random Phase	1.5	600	2.5	-	100	5	-55-100	5000
EL3071(P5)	7.12x6.5x3.5	800V VDRM Random Phase	1.5	800	2.5	-	100	15	-55-100	5000
EL3072(P5)	7.12x6.5x3.5	800V VDRM Random Phase	1.5	800	2.5	-	100	10	-55-100	5000
EL3073(P5)	7.12x6.5x3.5	800V VDRM Random Phase	1.5	800	2.5	-	100	5	-55-100	5000

Star mark * : Please refer to the schematic of Pin configuration with " * " mark

Photo Coupler | Triac Driver | 6Pin DIP-DC



UNIT : mm



*


1. Anode
2. Cathode
3. No Connection
4. Terminal
5. Substrate (do not connect)
6. Terminal

Product	Dimension (mm)	Feature	V _F (V)	V _{DRM} (Max) (V)	V _{TM} (V)	V _{INH} (V)	I _{T rms} (mA)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
EL3031	7.12x6.5x3.5	250V VDRM Zero-cross	1.5	250	3	20	100	15	-55-100	5000
EL3032	7.12x6.5x3.5	250V VDRM Zero-cross	1.5	250	3	20	100	10	-55-100	5000
EL3033	7.12x6.5x3.5	250V VDRM Zero-cross	1.5	250	3	20	100	5	-55-100	5000
EL3041	7.12x6.5x3.5	400V VDRM Zero-cross	1.5	400	3	20	100	15	-55-100	5000
EL3042	7.12x6.5x3.5	400V VDRM Zero-cross	1.5	400	3	20	100	10	-55-100	5000
EL3043	7.12x6.5x3.5	400V VDRM Zero-cross	1.5	400	3	20	100	5	-55-100	5000
EL3061	7.12x6.5x3.5	600V VDRM Zero-cross	1.5	600	3	20	100	15	-55-100	5000
EL3062	7.12x6.5x3.5	600V VDRM Zero-cross	1.5	600	3	20	100	10	-55-100	5000
EL3063	7.12x6.5x3.5	600V VDRM Zero-cross	1.5	600	3	20	100	5	-55-100	5000
EL3081	7.12x6.5x3.5	800V VDRM Zero-cross	1.5	800	3	20	100	15	-55-100	5000
EL3082	7.12x6.5x3.5	800V VDRM Zero-cross	1.5	800	3	20	100	10	-55-100	5000
EL3083	7.12x6.5x3.5	800V VDRM Zero-cross	1.5	800	3	20	100	5	-55-100	5000
*EL3010	7.12x6.5x3.5	250V VDRM Random Phase	1.5	250	2.5	-	100	15	-55-100	5000
*EL3011	7.12x6.5x3.5	250V VDRM Random Phase	1.5	250	2.5	-	100	10	-55-100	5000
*EL3012	7.12x6.5x3.5	250V VDRM Random Phase	1.5	250	2.5	-	100	5	-55-100	5000
*EL3020	7.12x6.5x3.5	400V VDRM Random Phase	1.5	400	2.5	-	100	30	-55-100	5000
*EL3021	7.12x6.5x3.5	400V VDRM Random Phase	1.5	400	2.5	-	100	15	-55-100	5000
*EL3022	7.12x6.5x3.5	400V VDRM Random Phase	1.5	400	2.5	-	100	10	-55-100	5000
*EL3023	7.12x6.5x3.5	400V VDRM Random Phase	1.5	400	2.5	-	100	5	-55-100	5000
*EL3051	7.12x6.5x3.5	600V VDRM Random Phase	1.5	600	2.5	-	100	15	-55-100	5000
*EL3052	7.12x6.5x3.5	600V VDRM Random Phase	1.5	600	2.5	-	100	10	-55-100	5000
*EL3053	7.12x6.5x3.5	600V VDRM Random Phase	1.5	600	2.5	-	100	5	-55-100	5000
EL3071	7.12x6.5x3.5	800V VDRM Random Phase	1.5	800	2.5	-	100	15	-55-100	5000
EL3072	7.12x6.5x3.5	800V VDRM Random Phase	1.5	800	2.5	-	100	10	-55-100	5000
EL3073	7.12x6.5x3.5	800V VDRM Random Phase	1.5	800	2.5	-	100	5	-55-100	5000

Photo Coupler | Triac Driver | 4Pin SOP




UNIT : mm

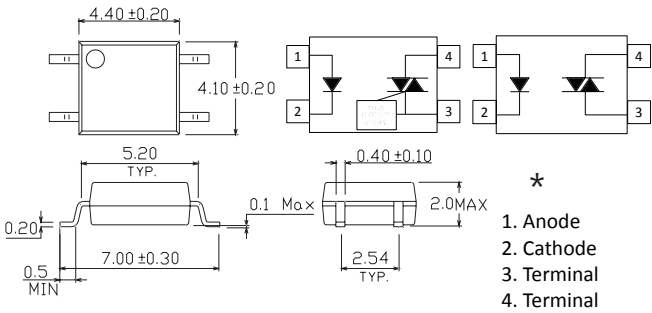



Product	Dimension (mm)	Number of Channels	V _F (V)	V _{DRM} (Max) (V)	V _{TM} (V)	V _{INH} (V)	I _{T rms} (mA)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
ELM3042	4.4x4.1x2	400V VDRM Zero-cross	1.5	400	3	20	70	10	-40-100	3750
ELM3043	4.4x4.1x2	400V VDRM Zero-cross	1.5	400	3	20	70	5	-40-100	3750
ELM3044	4.4x4.1x2	400V VDRM Zero-cross	1.5	400	3	20	70	3	-40-100	3750
ELM3062	4.4x4.1x2	600V VDRM Zero-cross	1.5	600	3	20	70	10	-40-100	3750
ELM3063	4.4x4.1x2	600V VDRM Zero-cross	1.5	600	3	20	70	5	-40-100	3750
ELM3064	4.4x4.1x2	600V VDRM Zero-cross	1.5	600	3	20	70	3	-40-100	3750
ELM3082	4.4x4.1x2	800V VDRM Zero-cross	1.5	800	3	20	70	10	-40-100	3750
ELM3083	4.4x4.1x2	800V VDRM Zero-cross	1.5	800	3	20	70	5	-40-100	3750
ELM3084	4.4x4.1x2	800V VDRM Zero-cross	1.5	800	3	20	70	3	-40-100	3750
*ELM3022	4.4x4.1x2	400V VDRM Random Phase	1.5	400	2.5	-	70	10	-40-100	3750
*ELM3023	4.4x4.1x2	400V VDRM Random Phase	1.5	400	2.5	-	70	5	-40-100	3750
*ELM3024	4.4x4.1x2	400V VDRM Random Phase	1.5	400	2.5	-	70	3	-40-100	3750
*ELM3052	4.4x4.1x2	600V VDRM Random Phase	1.5	600	2.5	-	70	10	-40-100	3750
*ELM3053	4.4x4.1x2	600V VDRM Random Phase	1.5	600	2.5	-	70	5	-40-100	3750
*ELM3054	4.4x4.1x2	600V VDRM Random Phase	1.5	600	2.5	-	70	3	-40-100	3750

Star mark * : Please refer to the schematic of Pin configuration with " * " mark

Photo Coupler | Photo Power Triac Driver | 8Pin DIP-DC

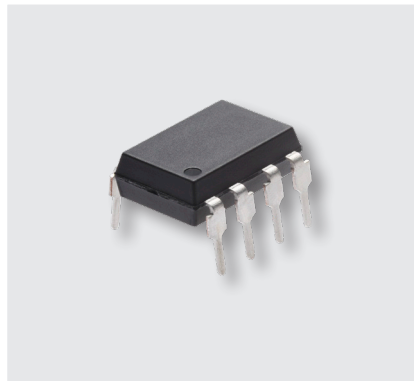


UNIT : mm


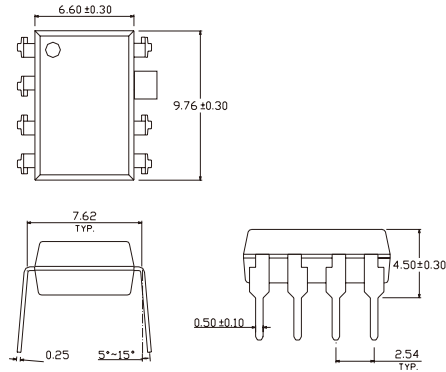


LED Anode 2
LED Cathode 1, 3, 4
Triac Gate 5
Triac T1 6
Triac T2, 8

Product	Dimension (mm)	Number of Channels	V_F (V)	$V_{DRM} (Max)$ (V)	V_{TM} (V)	V_{INH} (V)	I_T rms (mA)	I_{FT} (mA)	T_{OPR} (°C)	Viso (Vrms)
ELR0213	9.76x6.5x3.5	600V VDRM Zero-cross	1.4	600	2.5	50	300	10	-40-85	5000
ELR1213	9.76x6.5x3.5	600V VDRM Zero-cross	1.4	600	2.5	50	600	10	-40-85	5000
ELR2213	9.76x6.5x3.5	600V VDRM Zero-cross	1.4	600	2.5	50	900	10	-40-85	5000
ELR3213	9.76x6.5x3.5	600V VDRM Zero-cross	1.4	600	2.5	50	1200	10	-40-85	5000

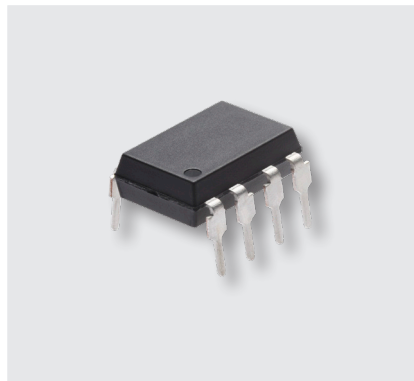

UNIT : mm

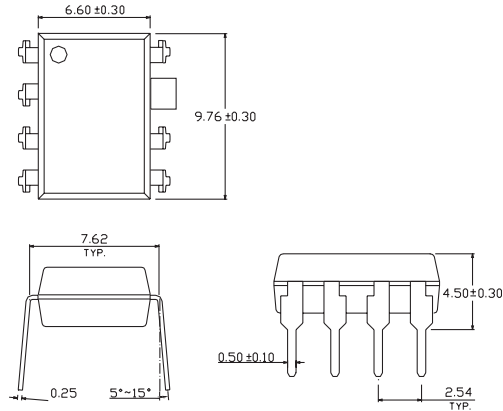



2. Anode
1, 3, 4. Cathode
5. Triac Gate
6. Triac T1
8. Triac T2

Product	Dimension (mm)	Number of Channels	V_F (V)	$V_{DRM} (Max)$ (V)	V_{TM} (V)	V_{INH} (V)	I_T rms (mA)	I_{FT} (mA)	T_{OPR} (°C)	Viso (Vrms)
ELR0223	9.76x6.5x3.5	600V VDRM Random Phase	1.4	600	2.5	-	300	10	-40-85	5000
ELR1223	9.76x6.5x3.5	600V VDRM Random Phase	1.4	600	2.5	-	600	10	-40-85	5000
ELR2223	9.76x6.5x3.5	600V VDRM Random Phase	1.4	600	2.5	-	900	10	-40-85	5000
ELR3223	9.76x6.5x3.5	600V VDRM Random Phase	1.4	600	2.5	-	1200	10	-40-85	5000

Photo Coupler | Solid State Relay | 4pin SOP




UNIT : mm





- 1. Anode
- 2. Cathode
- 3.4. Drain

Product	Dimension (mm)	Feature	Load Voltage (V)	Load Current (mA)	R _{ON} (typ)(Ω)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
ELM440A	4.4x4.3x2.2	Form A, 400V Mosfet output, AECQ101 option	400	120	30	5	-40-85	3750
ELM460A	4.4x4.3x2.2	Form A, 600V Mosfet output, AECQ101 option	600	50	70	5	-40-85	3750

Photo Coupler | Solid State Relay | 8pin SOP-2.54mm

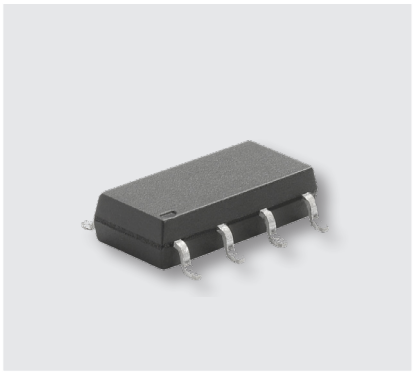

UNIT : mm







- Pin Configuration
- 1, 3 LED Cathode
 - 2, 4 LED Anode
 - 5,6,7,8 MOSFET

Product	Dimension (mm)	Feature	Load Voltage (V)	Load Current (mA)	R _{ON} (typ)(Ω)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
ELM840A	9.37x4.4x2.2	Form A, 400V Mosfet output, Dual CH	400	120	30	5	-40-85	3750

Photo Coupler | Solid State Relay | 4Pin DIP



UNIT : mm







1. Anode
2. Cathode
- 3.4. Drain

Product	Dimension (mm)	Feature	Load Voltage (V)	Load Current (mA)	R _{ON} (typ)(Ω)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
EL406A	6.5x4.58x3.5	Form A, 60V Mosfet output	60	550	2.5	5	-40-85	5000
EL425A	6.5x4.58x3.5	Form A, 250V Mosfet output	250	150	28	5	-40-85	5000
EL440A	6.5x4.58x3.5	Form A, 400V Mosfet output, AECQ101 option	400	120	30	5	-40-85	5000
EL460A	6.5x4.58x3.5	Form A, 600V Mosfet output, AECQ101 option	600	50	70	5	-40-85	5000

Photo Coupler | Solid State Relay | 6Pin DIP-DC




UNIT : mm




1. Anode
2. Cathode
4. Drain
5. Source
6. Drain

Product	Dimension (mm)	Feature	Load Voltage (V)	Load Current (mA)	R _{ON} (typ)(Ω)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
EL606A	8.8x6.5x3.5	Form A, 60V Mosfet output	60	550	2.5	3	-40-85	5000
EL625A	8.8x6.5x3.5	Form A, 250V Mosfet output	250	150	30	3	-40-85	5000
EL640A	8.8x6.5x3.5	Form A, 400V Mosfet output	400	120	30	3	-40-85	5000
EL660A	8.8x6.5x3.5	Form A, 600V Mosfet output	600	50	70	3	-40-85	5000
EL606A3	8.8x6.5x3.5	Form A, 60V Mosfet output, Low RDSON	60	2000	1	5	-40-110	3750
EL603A5	8.8x6.5x3.5	Form A, 30V Mosfet output, Low RDSON	30	5000	1	5	-40-110	3750
EL6150A	8.8x6.5x3.5	Form A, 1500V Mosfet output	1500	20	500	5	-40-110	3750
EV6150A	8.8x6.5x3.5	Form A, 1500V Mosfet output, AECQ101	1500	20	500	5	-40-125	3750

Photo Coupler | Solid State Relay | 8Pin DIP-DC

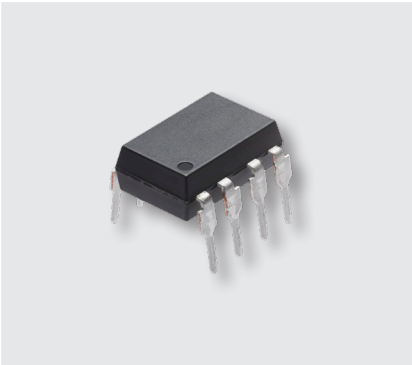

UNIT : mm

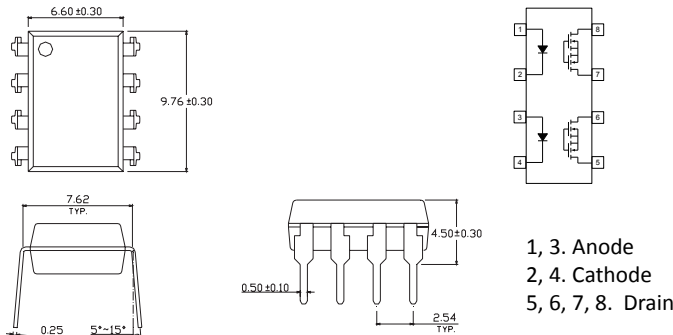


1, 3. Anode
2, 4. Cathode
5, 6, 7, 8. Drain

Product	Dimension (mm)	Feature	Load Voltage (V)	Load Current (mA)	R _{ON} (typ)(Ω)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
EL840A	9.76x6.6x3.5	Form A, 400V Mosfet output, Dual CH, AECQ101 option	400	120	30	5	-40-85	5000
EL860A	9.76x6.6x3.5	Form A, 600V Mosfet output, Dual CH, AECQ101 option	600	50	70	5	-40-85	5000

Photo Coupler | Solid State Relay | 16Pin DIP




UNIT : mm

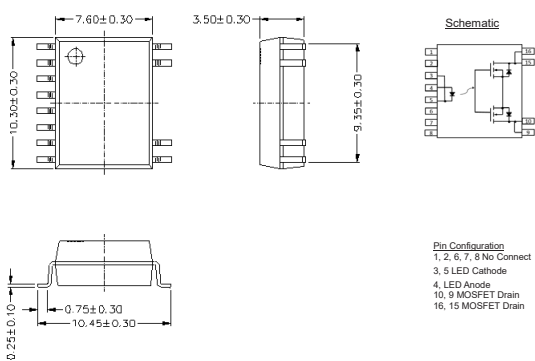


Pin Configuration
1, 2, 6, 7, 8 No Connect
3, 5 LED Cathode
4, LED Anode
10, 9 MOSFET Drain
16, 15 MOSFET Drain

Product	Dimension (mm)	Feature	Load Voltage (V)	Load Current (mA)	R _{ON} (typ)(Ω)	I _{FT} (mA)	T _{OPR} (°C)	Viso (Vrms)
EV16150A	10.3x7.6x3.5	Form A, 1500V Mosfet output, AECQ101	1500	20	500	5	-40-85	5000

Photo Coupler ■ Solid State Relay ■ 6Pin-SDIP-DIP

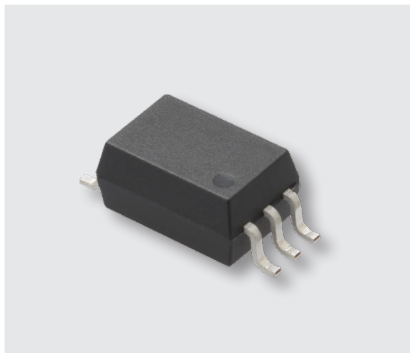

UNIT : mm

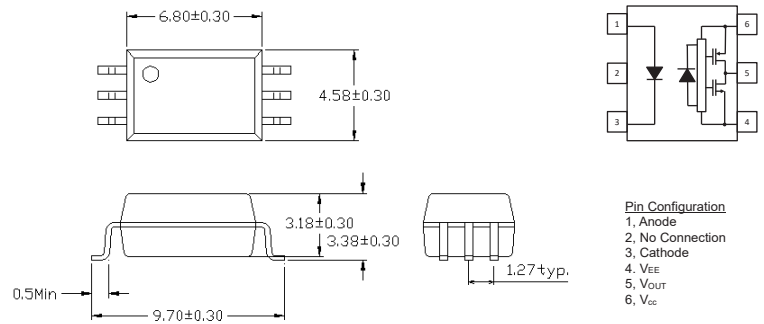


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	tPLH(ns)	tPHL(ns)	CMR(V/μs)	T _{OPR} (°C)	Viso (Vrms)
ELS3120	6.8x4.58x3.18	Rail to Rail Output, 2.5A	15-30	5	300	300	25000	-40-110	5000
ELS3121	6.8x4.58x3.18	Rail to Rail Output, 2.5A	10-30	5	300	300	25000	-40-110	5000
ELS3150	6.8x4.58x3.18	Rail to Rail Output, 1A	15-30	5	400	400	15000	-40-110	5000
ELS3151	6.8x4.58x3.18	Rail to Rail Output, 1A	10-30	5	400	400	15000	-40-110	5000

Photo Coupler ■ IGBT Gate Driver ■ 8Pin DIP-DC




UNIT : mm

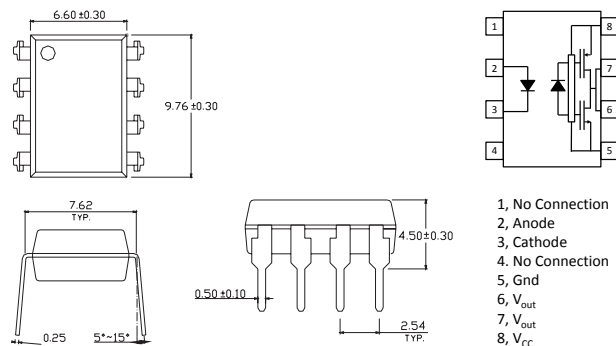


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	tPLH(ns)	tPHL(ns)	CMR(V/μs)	T _{OPR} (°C)	Viso (Vrms)
EL3120	9.76x6.6x3.5	Rail to Rail Output, 2.5A	15-30	5	300	300	25000	-40-110	5000
EL3121	9.76x6.6x3.5	Rail to Rail Output, 2.5A	10-30	5	300	300	25000	-40-110	5000
EL3150	9.76x6.6x3.5	Rail to Rail Output, 1A	15-30	5	300	300	20000	-40-110	5000
EL3151	9.76x6.6x3.5	Rail to Rail Output, 1A	10-30	5	300	300	20000	-40-110	5000

Photo Coupler | IGBT Gate Driver | 8pin Wide Body DIP-DC

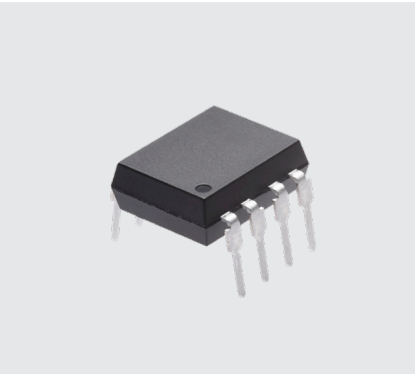

UNIT : mm

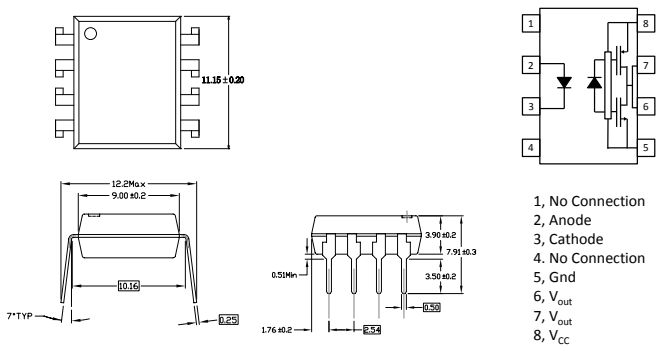


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	t _{PLH} (ns)	t _{PHL} (ns)	CMR (V/μs)	T _{OPR} (°C)	Viso (Vrms)
ELW3120	11.15x9x3.9	Rail to Rail Output, 2.5A	15-30	5	400	400	20000	-40-100	5000
ELW3121	11.15x9x3.9	Rail to Rail Output, 2.5A	10-30	5	400	400	20000	-40-100	5000
ELW3150	11.15x9x3.9	Rail to Rail Output, 1A	15-30	5	400	400	20000	-40-100	5000
ELW3151	11.15x9x3.9	Rail to Rail Output, 1A	10-30	5	400	400	20000	-40-100	5000

Photo Coupler | IGBT Gate Driver | 6PIN-LONG CREEPAGE-DC



UNIT : mm


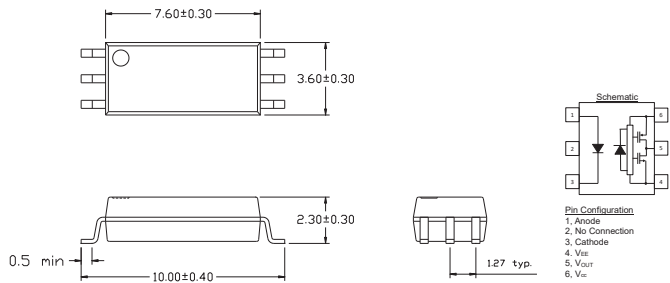


Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	t _{PLH} (ns)	t _{PHL} (ns)	CMR (V/μs)	T _{OPR} (°C)	Viso (Vrms)
EL5770	7.6x3.6x2.3	Rail to Rail Output, 4A	15-30	5	300	300	25000	-40-110	5000
EL5771	7.6x3.6x2.3	Rail to Rail Output, 4A	10-30	5	300	300	25000	-40-110	5000
EL5720	7.6x3.6x2.3	Rail to Rail Output, 2.5A	15-30	5	300	300	25000	-40-110	5000
EL5721	7.6x3.6x2.3	Rail to Rail Output, 2.5A	10-30	5	300	300	25000	-40-110	5000
EL5750	7.6x3.6x2.3	Rail to Rail Output, 1A	15-30	5	400	400	20000	-40-110	5000
EL5751	7.6x3.6x2.3	Rail to Rail Output, 1A	10-30	5	400	400	20000	-40-110	5000

Photo Coupler ■ IGBT Gate Driver ■ 8pin 15mm-LLSOP-DC



UNIT : mm




Pin Configuration
1, No Connection
2, Anode
3, Cathode
4, No Connection
5, VEE
6, VOUT
7, VOUT
8, VCC
Note A : 0.1 μ F bypass capacitor must be connected between pins 5 and 8

Product	Dimension (mm)	Feature	Supply Voltage (V)	I _{FT} (mA)	t _{PLH} (ns)	t _{PHL} (ns)	CMR (V/ μ s)	T _{OPR} (°C)	Viso (Vrms)
ELH3170	13.6x6.25x3.6	Rail to Rail Output, 4A, 15mm Creepage, CTI>600	15-30	5	300	300	25000	-40-105	7500

Photo Coupler ■ Linear Coupler ■ Linear 8PIN-DIP



UNIT : mm

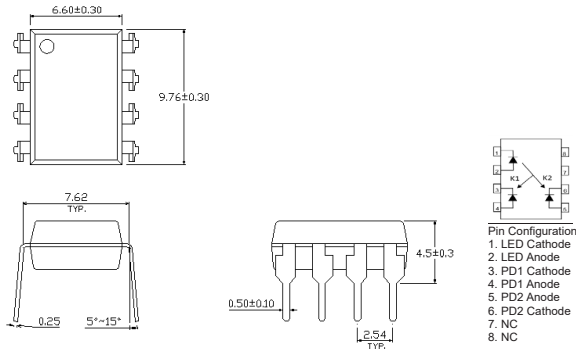


Product	Dimension (mm)	package	Feature	V _{RPD} (V)	Transfer Gain	Gain Error(25°C)	T _{OPR} (°C)	Viso (Vrms)
ELL300	9.76x6.6x3.5	DIP8	Great Linearity, Transfer Gain	30	1	±5%,±10%,±40%	-40-100	5000

Photo Coupler ■ Linear Coupler ■ Linear 8pin Wide Body DIP-DC




UNIT : mm

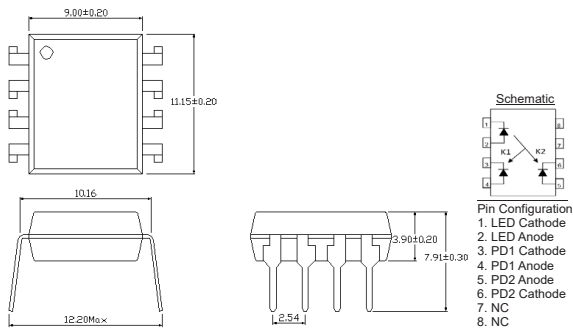


Product	Dimension (mm)	package	Feature	V _{RPD} (V)	Transfer Gain	Gain Error(25°C)	T _{OPR} (°C)	Viso (Vrms)
ELL200	11.15x9x3.9	WDIP8	Great Linearity, Transfer Gain	30	1	±5%,±10%,±40%	-40-100	5000

Photo Coupler | Isoamp | 8PIN-DIP

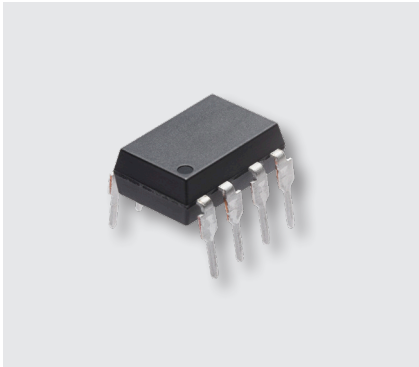

UNIT : mm

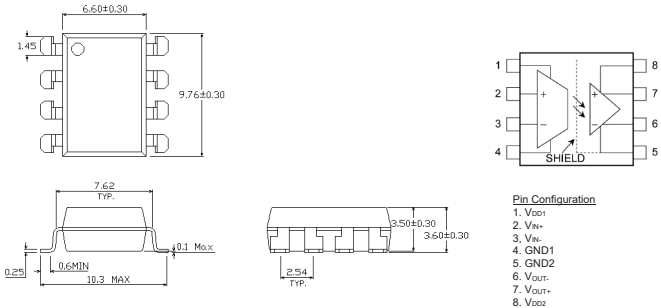


Product	Dimension (mm)	Feature	Supply Voltage (VDD1,VDD2)(V)	Gain	Gain error (25°C)	Input Voltage (mV)	T _{OPR} (°C)	Viso (Vrms)
EL7840	9.76x6.6x3.5	Analog, Low gain error	6	8	±2%	±200	-40-105	5000

Photo Coupler | Isoamp | 8pin SDIP



UNIT : mm

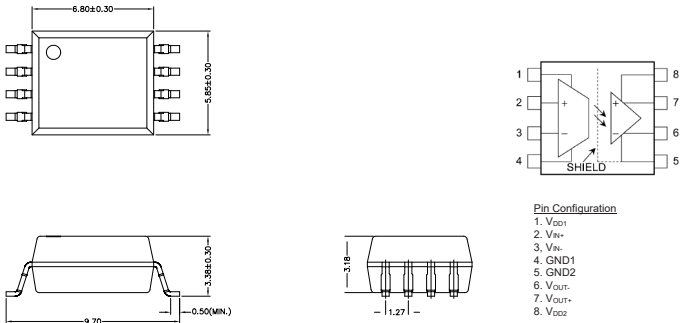


Product	Dimension (mm)	Feature	Supply Voltage (VDD1,VDD2)(V)	Gain	Gain error (25°C)	Input Voltage (mV)	T _{OPR} (°C)	Viso (Vrms)
ELK7840	6.8x5.85x3.18	Analog, Low gain error	6	8	±2%	±200	-40-105	5000

Photo Coupler

Digital Isolation | High speed Digital isolator | SO8



UNIT : mm

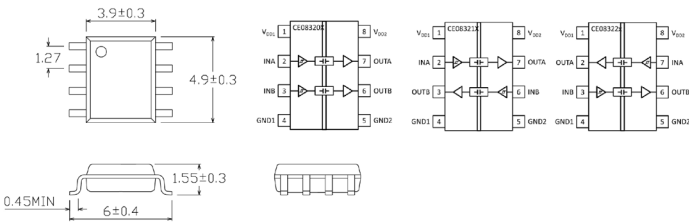


Product	Dimension (mm)	channel	speed type	output voltage state	CMTI	Temperature Range
CE08320ML(TA)-G	4.9x3.9x1.55	2	10Mbps	Low	75kv/us	-40 to 125°C
CE08320MH(TA)-G	4.9x3.9x1.55	2	10Mbps	High	75kv/us	-40 to 125°C
CE08321MH(TA)-G	4.9x3.9x1.55	2	10Mbps	High	75kv/us	-40 to 125°C
CE08322ML(TA)-G	4.9x3.9x1.55	2	10Mbps	Low	75kv/us	-40 to 125°C
CE08322MH(TA)-G	4.9x3.9x1.55	2	10Mbps	High	75kv/us	-40 to 125°C
CE08320EL(TA)-G	4.9x3.9x1.55	2	200Mbps	Low	75kv/us	-40 to 125°C
CE08320EH(TA)-G	4.9x3.9x1.55	2	200Mbps	High	75kv/us	-40 to 125°C
CE08321EH(TA)-G	4.9x3.9x1.55	2	200Mbps	High	75kv/us	-40 to 125°C
CE08322EL(TA)-G	4.9x3.9x1.55	2	200Mbps	Low	75kv/us	-40 to 125°C
CE08322EH(TA)-G	4.9x3.9x1.55	2	200Mbps	High	75kv/us	-40 to 125°C

Digital Isolation ■ High speed Digital isolator ■ 16pin LSOP



UNIT : mm

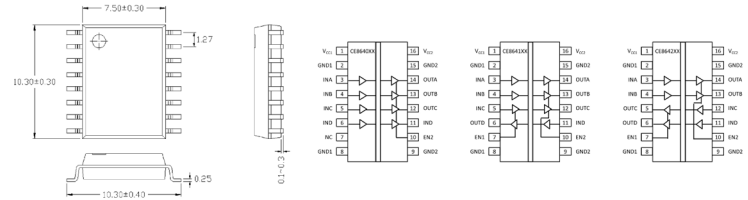


Product	Dimension (mm)	channel	speed type	output voltage state	CMTI	Temperature Range
CE8322ML(TA)-G	10.3x7.9x 2.5	2	10Mbps	Low	120kv/us	-40 to 125°C
CE8322MH(TA)-G	10.3x7.9x 2.5	2	10Mbps	High	120kv/us	-40 to 125°C
CE8322EL(TA)-G	10.3x7.9x 2.5	2	200Mbps	Low	120kv/us	-40 to 125°C
CE8322EH(TA)-G	10.3x7.9x 2.5	2	200Mbps	High	120kv/us	-40 to 125°C
CE8640ML(TA)-G	10.3x7.9x 2.5	4	10Mbps	Low	120kv/us	-40 to 125°C
CE8641MH(TA)-G	10.3x7.9x 2.5	4	10Mbps	High	120kv/us	-40 to 125°C
CE8642ML(TA)-G	10.3x7.9x 2.5	4	10Mbps	Low	120kv/us	-40 to 125°C
CE8642MH(TA)-G	10.3x7.9x 2.5	4	10Mbps	High	120kv/us	-40 to 125°C
CE8640EL(TA)-G	10.3x7.9x 2.5	4	200Mbps	Low	120kv/us	-40 to 125°C
CE8641EH(TA)-G	10.3x7.9x 2.5	4	200Mbps	High	120kv/us	-40 to 125°C
CE8642EL(TA)-G	10.3x7.9x 2.5	4	200Mbps	Low	120kv/us	-40 to 125°C
CE8642EH(TA)-G	10.3x7.9x 2.5	4	200Mbps	High	120kv/us	-40 to 125°C

Digital Isolation ■ High speed Digital isolator ■ 16pin SOPN




UNIT : mm

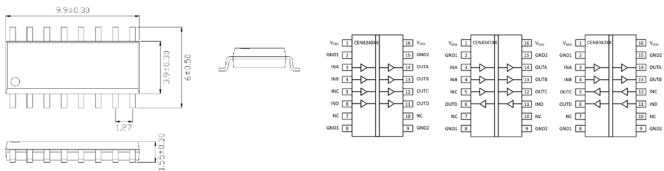


Product	Dimension (mm)	channel	speed type	output voltage state	CMTI	Temperature Range
CEN8340ML(TA)-G	9.9x3.9x1.55	4	10Mbps	Low	75kv/us	-40 to 125°C
CEN8342ML(TA)-G	9.9x3.9x1.55	4	10Mbps	Low	75kv/us	-40 to 125°C
CEN8340EL(TA)-G	9.9x3.9x1.55	4	200Mbps	Low	75kv/us	-40 to 125°C
CEN8342EL(TA)-G	9.9x3.9x1.55	4	200Mbps	Low	75kv/us	-40 to 125°C

Digital Isolation ■ High speed Digital isolator ■ 16pin QSOP

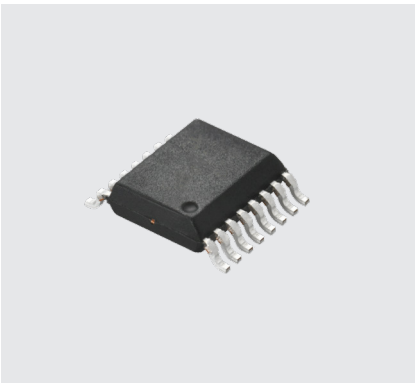

UNIT : mm

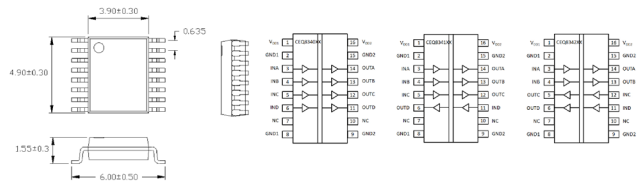


Product	Dimension (mm)	channel	speed type	output voltage state	CMTI	Temperature Range
CEQ8340ML(TA)-G	4.9x3.9x1.55	4	10Mbps	Low	75kv/us	-40 to 125°C
CEQ8341ML(TA)-G	4.9x3.9x1.55	4	10Mbps	Low	75kv/us	-40 to 125°C
CEQ8342ML(TA)-G	4.9x3.9x1.55	4	10Mbps	Low	75kv/us	-40 to 125°C
CEQ8340EL(TA)-G	4.9x3.9x1.55	4	200Mbps	Low	75kv/us	-40 to 125°C
CEQ8341EL(TA)-G	4.9x3.9x1.55	4	200Mbps	Low	75kv/us	-40 to 125°C
CEQ8342EL(TA)-G	4.9x3.9x1.55	4	200Mbps	Low	75kv/us	-40 to 125°C

Digital Isolation ■ Isolation Amplifier ■ 8pin SDIP



UNIT : mm

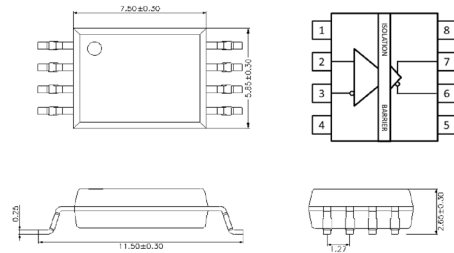


Product	Dimension (mm)	Fixed Gain	Low nonlinearity and drift	gain error (max)	CMTI	Temperature Range
CEK79	7.5x5.85x 2.65	8.2	0.03%, ±1ppm/°C (typical)	±0.3%, ±30ppm/°C	150 kV/us	-40 to 125°C
CEK87	7.5x5.85x 2.65	1	0.04%, ±1ppm/°C (typical)	±0.3%, ±30ppm/°C	150 kV/us	-40 to 125°C

Digital Isolation ■ Gate Driver ■ 16pin SDIP



UNIT : mm

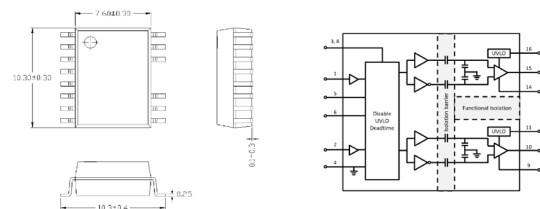

Product	Dimension (mm)	source current	sink current	UVLO Rising threshold	CMTI	Temperature Range
CE21550A	10.3x7.9x 2.5	4A	8A	6.5V	100KV/us	-40 to 125°C
CE21550B	10.3x7.9x 2.5	4A	8A	9.2V	100KV/us	-40 to 125°C



SEMI POWER


306 TO Series

311 DFN Series


Semi Power | TO Series




UNIT : mm

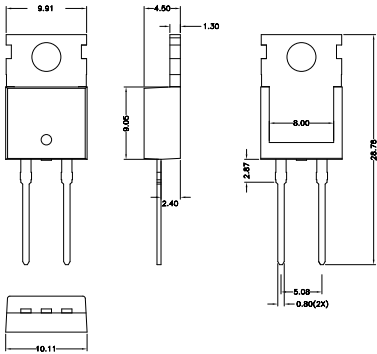

Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-220-2L	10.11*28.78*4.5	Through Hole	2	SiC SBD	650/1200

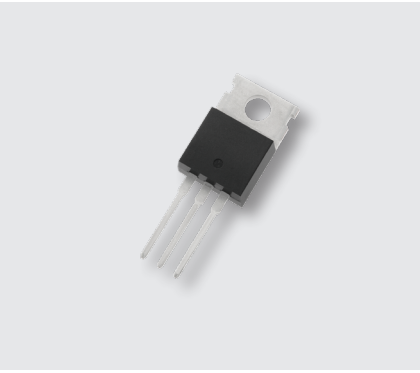

UNIT : mm

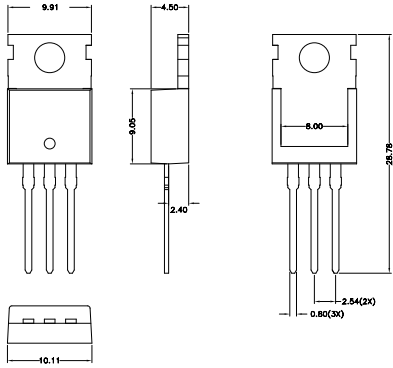


Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-220-3L	10.11*28.78*4.5	Through Hole	3	SiC MOSFET 、 Si MOSFET	650/1200


Semi Power | TO Series




UNIT : mm

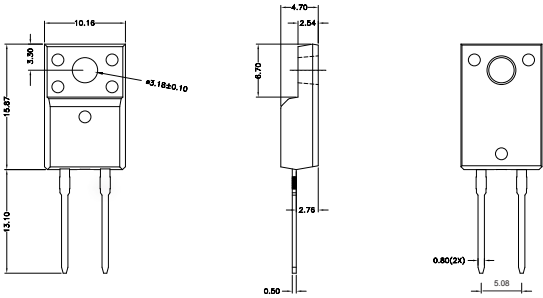

Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-220F-2L	10.16*28.97*4.7	Through Hole	2	SiC SBD	650/1200

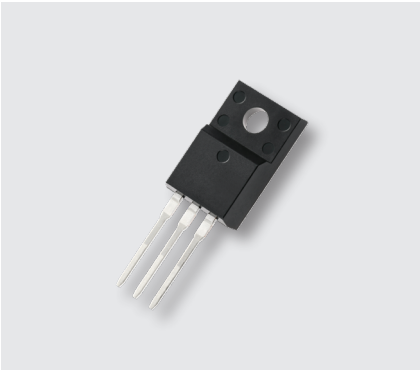

UNIT : mm

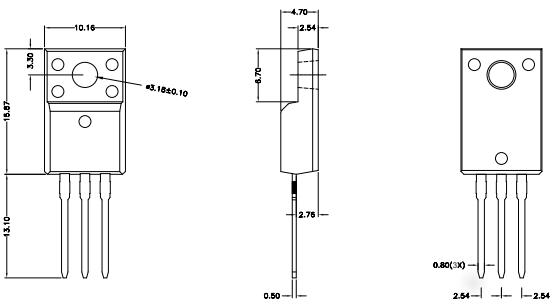


Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-220F-3L	10.16*28.97*4.7	Through Hole	3	SiC MOSFET、Si MOSFET	650/1200

Semi Power | TO Series




UNIT : mm

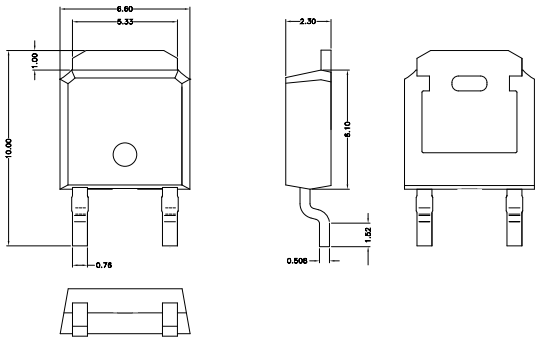

Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-252-2L	6.60*9.84*2.30	SMD/SMT	2	SiC SBD	650



UNIT : mm

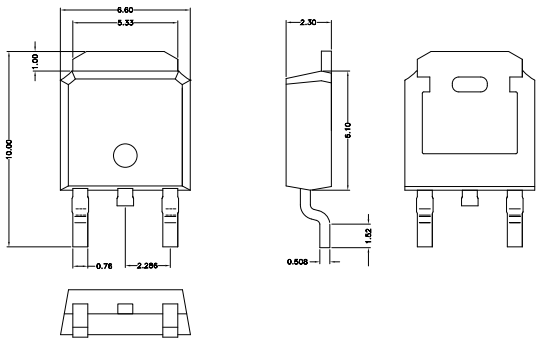


Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-252-3L	6.6x10x2.3	SMD/SMT	3	SiC SBD、Si MOSFET	650

Semi Power | TO Series




UNIT : mm

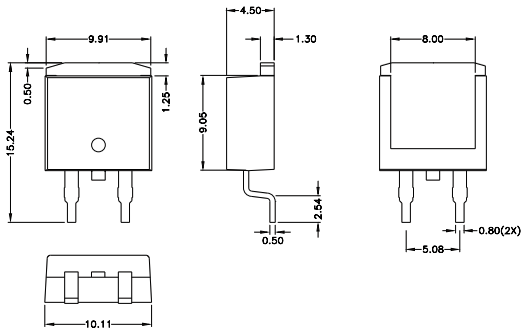


Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-263-2L	10.11*15*4.5	SMD/SMT	2	SiC MOSFET	650/1200




UNIT : mm

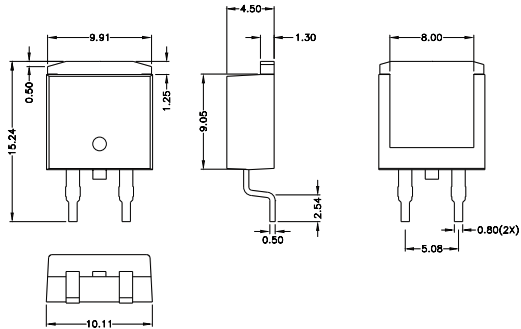

Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-263-3L	10.11*15*4.5	SMD/SMT	3	SiC SBD	650/1200

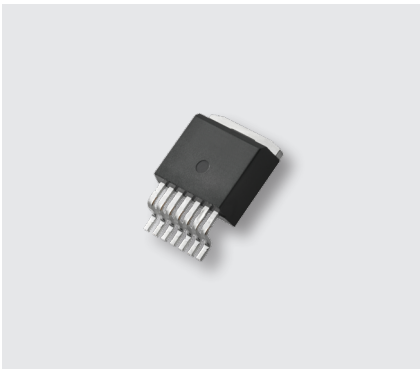

UNIT : mm

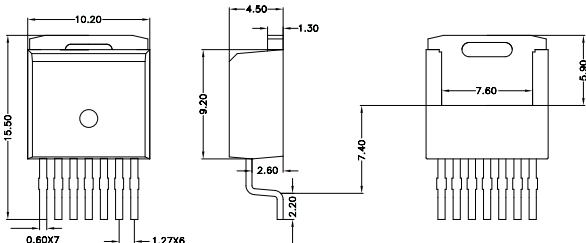


Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-263-7L	10.2*15.5*4.5	SMD/SMT	7	SiC MOSFET	650/1200/1700


Semi Power | TO Series




UNIT : mm

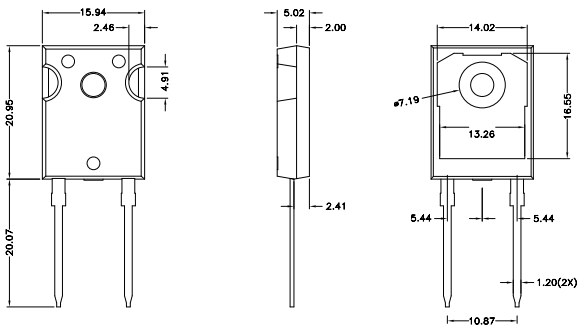


Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-247-2L	15.94*41.02*5.02	Through Hole	2	SiC SBD	650/1200/1700

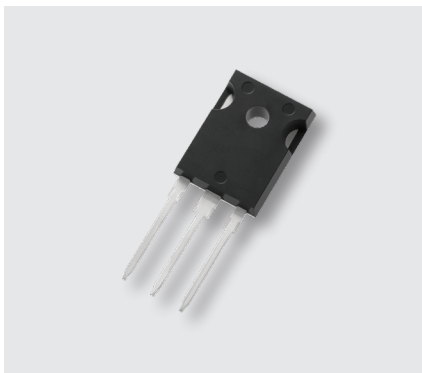


UNIT : mm

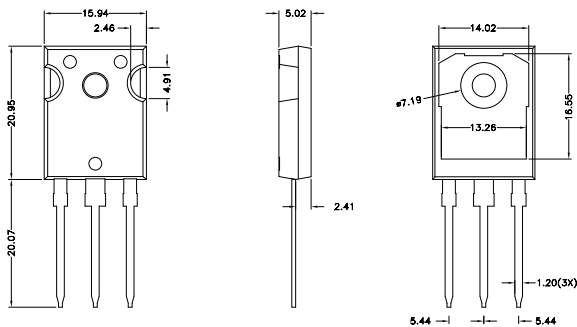

Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-247-3L	15.94*41.02*5.02	Through Hole	3	SiC SBD /Dual SBD 、 SiC MOSFET	650/1200/1700


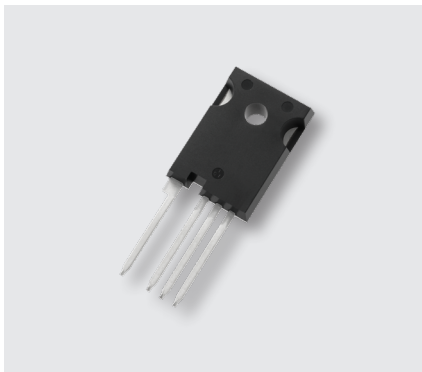


UNIT : mm

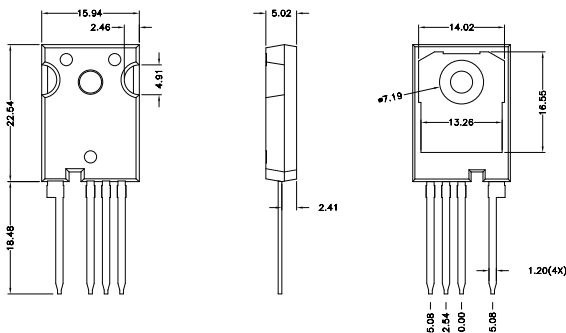

Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
TO-247-4L	15.94*41.02*5.02	Through Hole	4	SiC MOSFET	650/1200/1700/2000


Semi Power | DFN Series

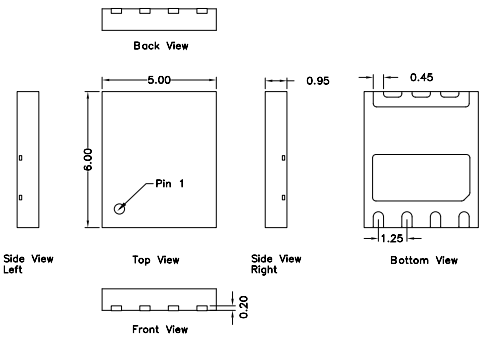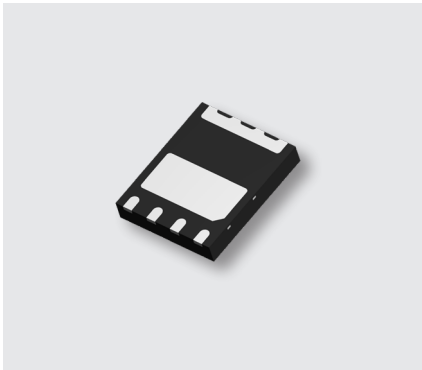


Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
DFN 5x6-5L	5*6*0.95	SMD/SMT	5	SiC MOSFET 、 Si MOSFET 、 GaN Transistor	650




UNIT : mm

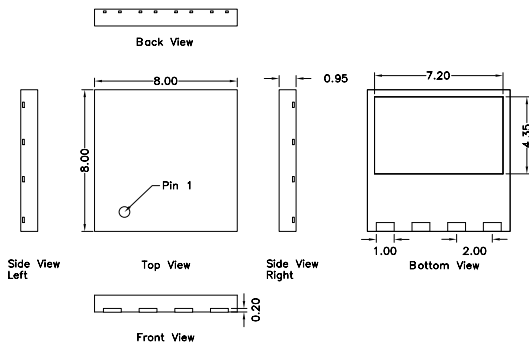

Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
DFN 8x8-5L	8*8*0.95	SMD/SMT	5	SiC SBD 、 SiC MOSFET 、 Si MOSFET	650

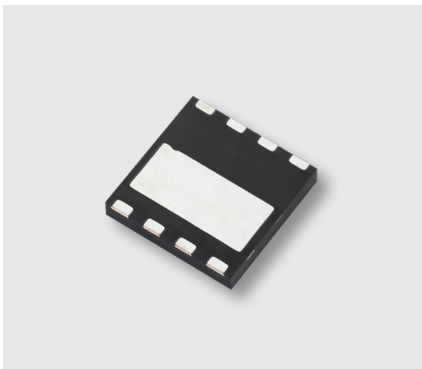

UNIT : mm

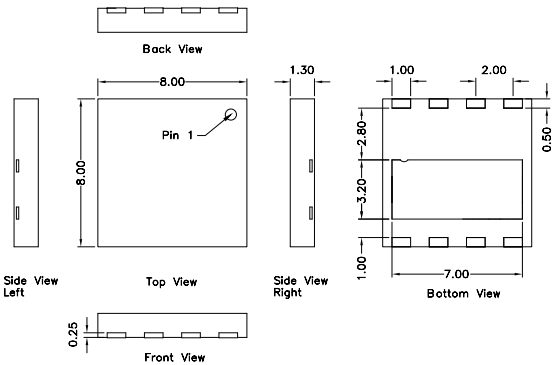

Product	Dimention(mm)	Mounting Style	Pins	Device Type	Breakdown Voltage [V]
DFN 8x8-8L	8*8*1.3	SMD/SMT	8	GaN Transistor	650

Notice

The content of this Catalogue is provided for informational purposes only. EVERLIGHT makes no representations about the accuracy, reliability, completeness of the information in this catalogue. EVERLIGHT may, at its sole discretion, revise the specifications, appearance, structures and materials herein without notice for the purpose of improvement. Please contact EVERLIGHT sales should you require more information on a product or its application.

This Catalogue does not contain any guarantee or agreed quality of EVERLIGHT's products or any warranty of merchantability, intellectual property, and fitness for a particular purpose. EVERLIGHT's obligation and responsibilities regarding its products are governed solely by the agreements under which they are sold. Unless otherwise agreed in writing, the information contained herein does not become part of the agreements.

The trademarks and logos ("Trademarks") displayed in this Catalogue are the property of EVERLIGHT and/or its affiliates. Nothing in this Catalogue should be construed as granting any licenses or right to the Trademarks. Without the express written consent of EVERLIGHT, the use of the Trademarks is prohibited.

All text, images, graphics and other materials contained in this Catalogue are subject to the copyright and other intellectual property rights of EVERLIGHT and/or its affiliates.

ASIA**CHINA****CHINA, HONG KONG**

EVERLIGHT ELECTRONICS CO., LTD.

Units 305, 3/F., Prosperity Place,
6 Shing Yip Street, Kwun Tong, Kowloon,
Hong Kong

TEL: +852-2388-0602

FAX: +852-2388-1127

CHINA, SHENZHEN

EVERLIGHT ELECTRONICS CO., LTD.

Room 1101-1102, 3A Building, Period 1,
Tian An Cloud Park, NO.2018, Xuegang Rd.,
Bantian Sub-District, LongGang District,
Shenzhen City, Guangdong Province, China
Postcode: 518010

TEL: +86-0755-2163-8620

FAX: +86-0755-2163-8764

CHINA, GUANGZHOU

EVERLIGHT ELECTRONICS CO., LTD.

508 Room, Jiaotou Building, 131 Dongxing Road,
Panyu District, Guangzhou city, Guangdong, China
Postcode: 511400

TEL: +86-(0)20-8466-3392

FAX: +86-(0)20-8466-3372

CHINA, SUZHOU

EVERLIGHT ELECTRONICS CO., LTD.

5F, Wanrong International Building,
NO. 3158, Renmin Rd., Gusu Dist., Suzhou City,
Jiangsu Province, P.R. China
Postcode: 215011

TEL: +86-(0)512-8860-5888

CHINA, TIANJIN

EVERLIGHT ELECTRONICS CO., LTD

ROOM 505, Zhongguancun E-Valley Creative
World, No 37, NanKai Three Road, NanKai District,
TianJin, China, 300100

Postcode: 300100

TEL: +86-22-2635-1122

KOREA

EVERLIGHT OPTOELECTRONICS

KOREA CO., LTD.

7F S706-1 Garden 5 Works Choongmin Rd52.,
Songpa-gu, Seoul, KOREA.

TEL: +82-2-2047-3960

FAX: +82-2-2047-3961

EMAIL: terrychoi@everlightkorea.com

JAPAN, TOKYO

EVERLIGHT JAPAN CORPORATION

4F, FTK Building, 11-22 Higashidacho,
Kawasaki-ku, Kawasaki-shi,
Kanagawa 210-0005, Japan

TEL: +81-44-280-7385

FAX: +81-44-280-7395

EMAIL: elj@everlight.com

JAPAN, KYOTO

EVERLIGHT JAPAN CORPORATION

7F, KYOTO YAMASHINA BLDG.

46-1, TAKEHANADONOMAECCHOU,
YAMASHINA KU, KYOTO, 607-8085, JAPAN

TEL: +81-75-584-6070

FAX: +81-75-584-6080

EMAIL: elj@everlight.com

INDIA, NEW DELHI

EVERLIGHT ELECTRONICS INDIA PRIVATE LTD.

No. 606, 6th Floor, Surya Kiran Building,
Connaught Place, KG Marg, Delhi 110001
Mobile: +91-914-8657774

EMAIL: salesindia@everlight.com

MALAYSIA

EVERLIGHT OPTOELECTRONICS(M) SDN BHD

B-04-20 Krystal Point,
303 Jalan Sultan Azlan Shah,
11900 Penang, Malaysia

TEL: +60-4-646-4233

EMAIL: inquiry@everlight.com.my

SINGAPORE

EVERLIGHT ELECTRONICS SINGAPORE PTE LTD

5 Tampines Central 6, #03-38 Telepark Building,
Singapore 529482

TEL: +65-6747-7937

EMAIL: asean@everlight.com.my

AMERICA**TEXAS USA**

EVERLIGHT AMERICAS INC.

3220 Commander Drive, Suite 100
Carrollton, Texas, 75006, United States
TEL: +1-972-490-4008

FAX: +1-972-490-5009

EMAIL: salesmarketing@everlightamericas.com

ONTARIO USA

EVERLIGHT AMERICAS INC.

8599 Haven Avenue, Suite 205, Rancho
Cucamonga, California 91730, United States
TEL: +1-909-308-4770

FAX: +1-909-308-4780

EMAIL: salesmarketing@everlightamericas.com

SAN JOSE USA

EVERLIGHT AMERICAS INC.

960 Saratoga Ave., Suite 112,
San Jose, California, 95129, United States
TEL: +1-408-816-7548

FAX: +1-408-816-7569

EMAIL: salesmarketing@everlightamericas.com

MICHIGAN USA

EVERLIGHT AMERICAS INC.

34405 W 12 Mile Rd, Suite 218
Farmington Hills, Michigan 48331
TEL: +1-734-224-9880

FAX: +1-734-224-9922

EMAIL: salesmarketing@everlightamericas.com

EUROPE**GERMANY, KARLSRUHE**

EVERLIGHT ELECTRONICS EUROPE GMBH

Siemensallee 84, Building 7302, 5F
76187 Karlsruhe, Germany
TEL: +49-721-82447-3

FAX: +49-721-82447-40

EMAIL: info@everlight-eu.de

全国免费电话：400-6258-289

HEADQUARTERS

No. 6-8, Zhonghua Rd., Shulin Dist., New Taipei City, Taiwan 23860

TEL: +886-2-2685-6688 FAX: +886-2-2685-6699

www.everlight.com